

## RockStar® Technical Information

Date of Issue	November 06, 2013
Portfolio	HDC
Issuer & Function	Tommy Probst – Product Support HDC

Issue	<b>Addition to TI regarding re-design HD7</b>
-------	---




### Description:

This is a short addition to the technical information from June 13<sup>th</sup> this year regarding the re-design of HD7 inserts. We have modified the coding of HD7 inserts according to IEC 61984 (6.5.3.) to meet the requirements.

### IEC 61984 – 6.5.3.:

Accessible metal parts of a connector with an earthing contact which may become live in the event of an insulation fault shall be reliably connected to the earthing contact.

**Please note:** From now, the re-designed HD7 inserts (male/female) will only fit into plastic housings !

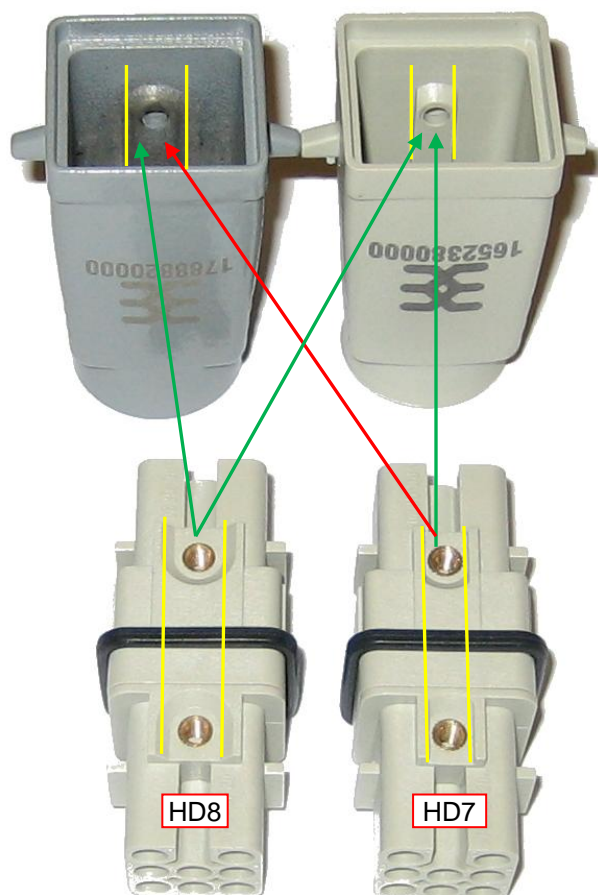

	HDC HD 8	HDC HD 7
Plastic housing	<b>50 V</b>	<b>250 V</b>
Metal housing	<b>50 V</b>	<b>-</b>