


Notes:

1. Only RoHS Compliant Processes and Materials used for this assembly.
2. Marking to Contain "ConductRF", Part No. & WK/YR Date Code, Black Text.
3. 100% Sweep Test to 6GHz w. factory stored Hi-Point data.

ConductRF(Wk/Yr)
LSA28-S1M2-XXX

Marker Example

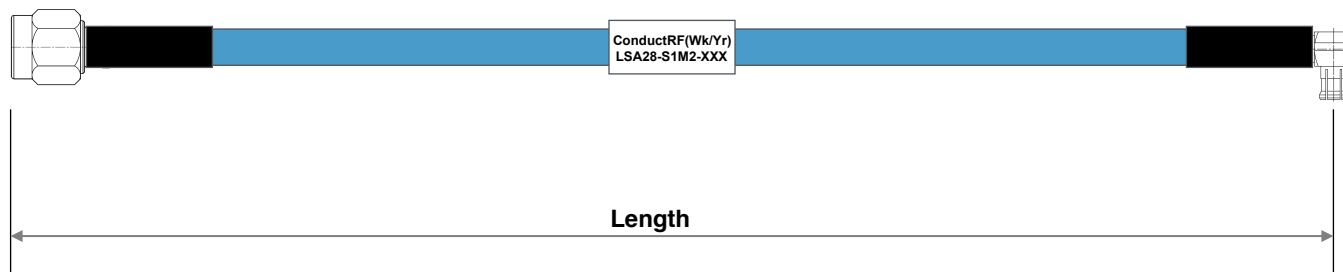

ConductRF # (XXX)	Length (in.)	Insertion Loss(dB) Typ.
		6GHz
S06	6"	0.51
S08	8"	0.62
S12	12"	0.84
S16	16"	1.06
S18	18"	1.17
S24	24"	1.49
S36	36"	2.15
S48	48"	2.80
S60	60"	3.45
VSWR Typ.		1.38:1

Part No. Configurator - XXX

FXX = Length in Feet (eg F03=3ft)
SXX = Length in Inches (eg S18=18")
XMX = Length in Meters (eg 2M5=2.5m)
CXX = Length in CM (eg C50=50cm)

5	Shrink Tube	Marker	White
4	Shrink Tube	Standard	Black
3	Flex 0.086"	A28SS	Blue FEP
2	MCX R/A Male	M5M21D-A28G01	Gold
1	SMA Straight Male	PSM12B-A28G01	Pass. SS
ITEM	DESCRIPTION	MATERIALS	FINISH

					Customer DWG	Title: 6GHz Flexible 0.086" SMA Male to MCX R/A Male Assembly					
						Remarks:	Originated: 01/27/18	Conduct RF sales@ConductRF.com Tel: +1 978 374 6840	Range: LSA		Sheet 1 of 1
									Dwg Ref: LSA28-S1M2		
1	Pre-Release		DG	01/27/18							
REV.	DESCRIPTION	ECN	DRAWN	DATE	Length Tolerances: ≤24" = ±0.25" >24" = ± 1%	Checked: JW	Approved: PL	Rev: 1	Part No: LSA28-S1M2-XXX		
REVISION HISTORY											