


Notes:

1. Only RoHS Compliant Processes and Materials used for this assembly.
2. Sweep Tested to validate Max VSWR @ Max Freq. Gate to remove Adapters.
3. Store Hi-Point Data.

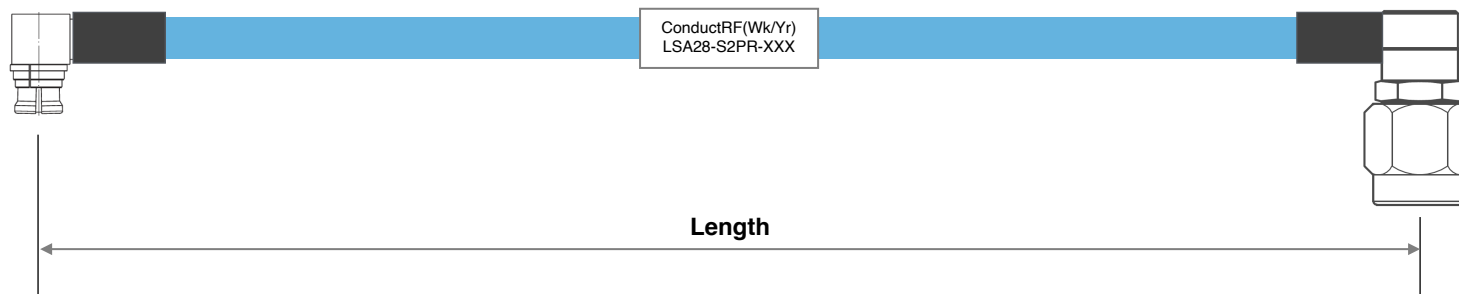


Max. Insertion Loss(dB)

ConductRF # (XXX)	Length (in.)	3GHz	6GHz	12GHz	18GHz
S12	12"	0.585	0.841	1.217	1.515
S24	24"	1.037	1.494	2.166	2.704
S36	36"	1.489	2.146	3.116	3.893
	L(cm)	3GHz	6GHz	12GHz	18GHz
50C	50	0.874	1.259	1.825	2.277
100C	100	1.616	2.329	3.383	4.226
	VSWR	1.40:1			1.50:1

Part No. Configurator - XXX

FXX = Length in Feet (eg F03=3ft)
 SXX = Length in Inches (eg S18=18")
 XMX = Length in Meters (eg 2M5=2.5m)
 CXX = Length in CM (eg C50=50cm)

5	Marker	Shrink Tube	White
4	Strain Relief	Shrink Tube	Black
3	Semi-Flex Cable	A28SS	Blue FEP
2	SMP R/A Female	PPF23A-A28S01	Gold
1	SMA R/A Male	PSM21A-A28G01	Pass. SS
ITEM	DESCRIPTION	MATERIALS	FINISH

					Customer DWG	Title: 0.086" Flex SMP R/A Female to SMA R/A Male				
3	Updated SMP R/A to 23A		DG	02/12/21	Remarks:	Originated: 11/17/16	Conduct RF sales@ConductRF.com Tel: +1 978 374 6840	Range: LSA	Sheet 1 of 1	
2	Updated to HF SMP		DG	07/17/20				Dwg Ref: LSA28-S2PR		
1	Pre-Release		DG	11/17/16						
REV.	DESCRIPTION	ECN	DRAWN	DATE	Length Tolerances: ≤12" = ±0.10" >24" = ±0.25"	Checked: JW	Approved: PL	Rev: 3	Part No: LSA28-S2PR-XXX	
REVISION HISTORY										