


**TABLE 1: ELECTRICAL SPECIFICATIONS AT 25 °C**  
 SWITCHING TRANSFORMER DESIGNED FOR USE WITH POWER INTEGRATIONS  
 PWR-TOP202YAI. REFER TO APPLICATION CIRCUIT OF FIGURE 3.  
 (Equivalent to T1202 on PWR-ST202A Demo Board)

PARAMETER	SPEC LIMITS			UNITS
	MIN.	TYP.	MAX.	
PRIMARY INDUCTANCE (2-1) VOLTAGE = 0.250Vrms FREQUENCY = 100 KHZ	558	620	682	μHY
TURN RATIO'S: SECONDARY (8-7) : PRIMARY (2-1) BIAS (3-4) : PRIMARY (2-1)	----- -----	1:10.80 1: 7.71	----- -----	± 3% ± 3%
PRI LEAKAGE IND. (7-8 SHORTED) VOLTAGE = 0.250Vrms FREQUENCY = 100 KHZ	-----	-----	15.0	μHY
HIPOT: PRIMARY TO SECONDARY BIAS TO SECONDARY	3000 3000	----- -----	----- -----	Vrms Vrms
APP CIRCUIT PARAMETERS: (1) AC LINE VOLTAGE 47/400 Hz OUTPUT VOLTAGE OUTPUT CURRENT CONTINUOUS OUTPUT CURRENT PEAK LINE REGULATION (85 TO 265Vac) LOAD REGULATION 10-100% RIPPLE	85 ----- 0.0 ----- ----- ----- ----- -----	----- 7.5 ----- ----- 0.20 0.20 50.0	265 ----- 2.0 3.0 ----- ----- -----	Vac Vdc Amps Amps ±% ±% ±mV

(1) REFER TO APPLICATION CIRCUIT OF FIGURE 3.


**FIGURE 1: SCHEMATIC DIAGRAM**

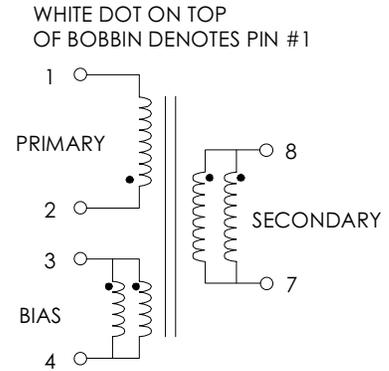


**NOTE1:**  
**REINFORCED INSULATION SYSTEM, UL1950, IEC950, CSA-950:**  
 A) ALL MATERIALS MEET "UL", "CSA" & "IEC" REQUIREMENTS  
 B) TRIPLE BASIC INSULATED SECONDARY.  
 C) DESIGNED TO MEET ≥6.2mm CREEPAGE REQUIREMENTS.  
 D) VARNISH FINISHED ASSEMBLY.  
 E) UL1950 & CSA-950 CERTIFIED: FILE #E162344.  
 F) UL CLASS (B) 130 INSULATION SYSTEM PM130-R1,  
 PM130-H1, PM130-H1A (UL FILE #E177139) OR ANY UL  
 AUTHORIZED CLASS (B) INSULATION SYSTEM.



**FIGURE 2: PHYSICAL DIMENSIONS mm (INCHES)**

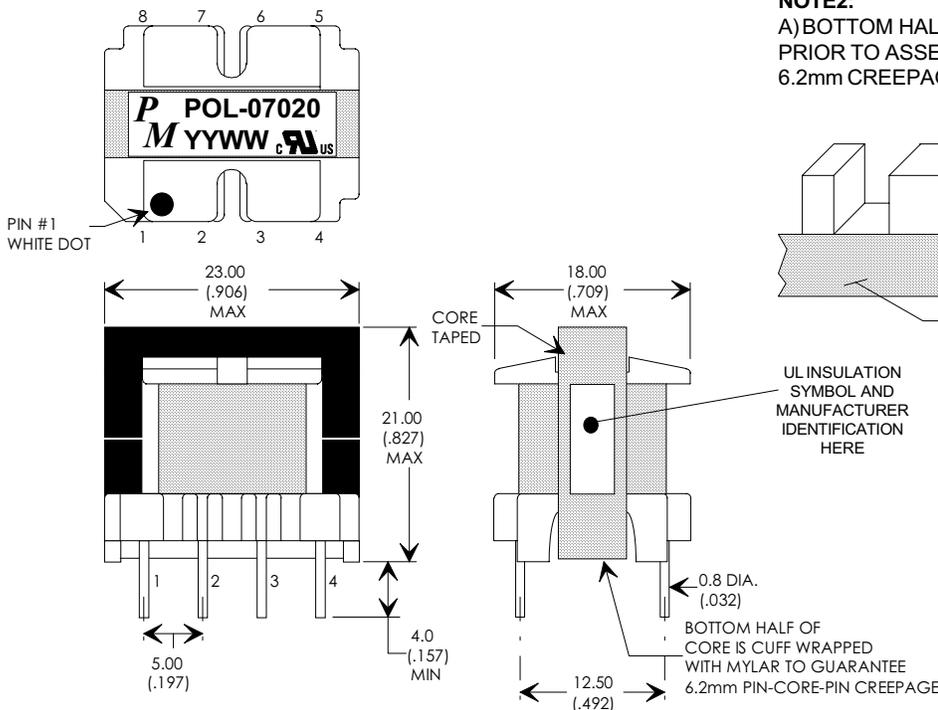

**NOTE2:**  
 A) BOTTOM HALF OF CORE IS CUFF WRAPPED  
 PRIOR TO ASSEMBLY. THIS GAURANTEES  
 6.2mm CREEPAGE PIN-CORE-PIN

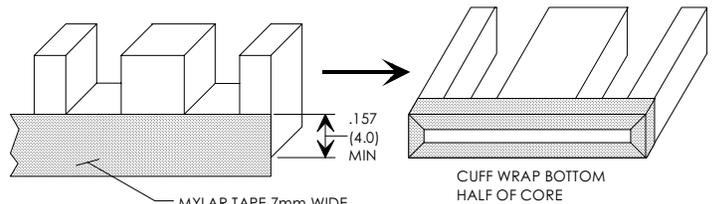

REV.	DESCRIPTION OF CHANGES	BY
09/26/95	UPDATED DIMENSIONS, ADDED MARGIN TAPE TO BIAS NOTE D.	TO
12/20/95	ADDED STEP TO SMOOTH SOLDER JOINTS TO MEET 11.20mm MIN PIN-PIN	TO
05/06/99	UPDATED TO UL CLASS (B) 130 INSULATION SYSTEM	MD

EI22/19/6, 8-PIN VERTICAL BOBBIN



**Premier  
Magnetics Inc.**

UNLESS OTHERWISE SPECIFIED  
 DIMENSIONS ARE IN MM  
 DIMENSIONAL TOLERANCES ARE:  
 DECIMALS ANGLES  
 .X ± .25 ±0° 30'  
 .XX ± .15  
 DO NOT SCALE DRAWING

**TRANSFORMER CONTROL DRAWING**

PREMIER P/N: POL-07020	REVISION: 05/06/99
DRAWN BY: TOM O'NEIL	REF: PWR-TOP202YAI
SCALE: NONE	SHEET: 1 OF 6


## APPLICATION NOTES

Premier Magnetics' POL-07020 Switch Mode Transformer was designed for use with Power Integrations, Inc. PWR-TOP202YA1 three terminal off-line PWM switching regulator in the Flyback Buck-Boost circuit configuration. This conversion topology can provide isolated multiple outputs with efficiencies up to 90%. Premier's POL-07020 transformer has been optimized to provide maximum power throughput.

The PWR-TOPXXX series from Power Integrations, Inc. are self contained 100kHz three terminal voltage controlled PWM switching regulators. This series contains all necessary functions for an off-line switched mode control DC power source. These switching regulators provide a very simple solution to off-line designs. The inductors and transformer used with the PWR-TOPXXX are critical to the performance of the circuit. They define the overall efficiency, output power and overall physical size.

Below is a universal input high precision 15 watt application circuit utilizing Power Integrations PWR-TOP202 switching regulator in the flyback buck-boost configuration. The component values listed are intended for reference purposes only. The soft start capacitor  $C_{ss}$  is optional depending on the specific application. Simpler topology is possible depending on the line/load regulation required.

**FIGURE 3: TYPICAL APPLICATION CIRCUIT**

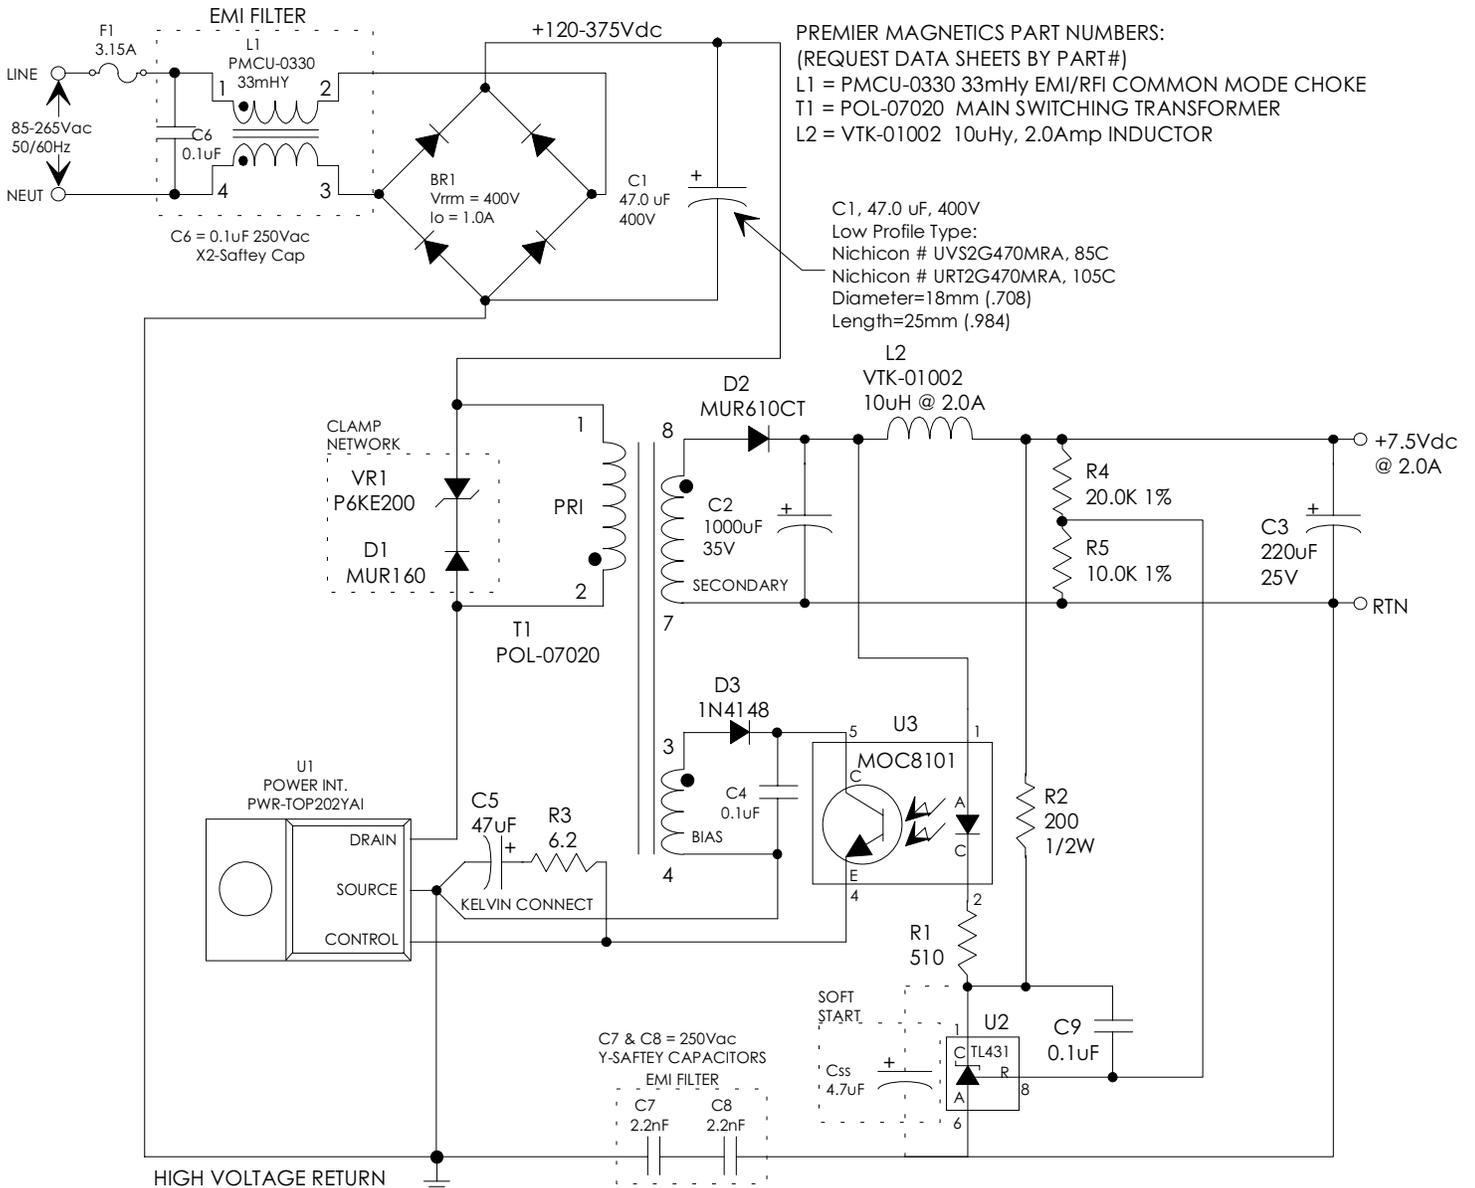

UNLESS OTHERWISE SPECIFIED  
DIMENSIONS ARE IN MM  
DIMENSIONAL TOLERANCES ARE:  
DECIMALS ANGLES  
.X ± .25 ±0° 30'  
.XX ± .15  
DO NOT SCALE DRAWING

### TRANSFORMER CONTROL DRAWING

PREMIER P/N: POL-07020	REVISION: 05/06/99
DRAWN BY: TOM O'NEIL	REF: PWR-TOP202YA1
SCALE: NONE	SHEET: 2 OF 6