




### **INSULATION DISPLACEMENT CABLE**

.050" PITCH, 26 AWG, 19/34 STRANDED, EXTRUDED FEP

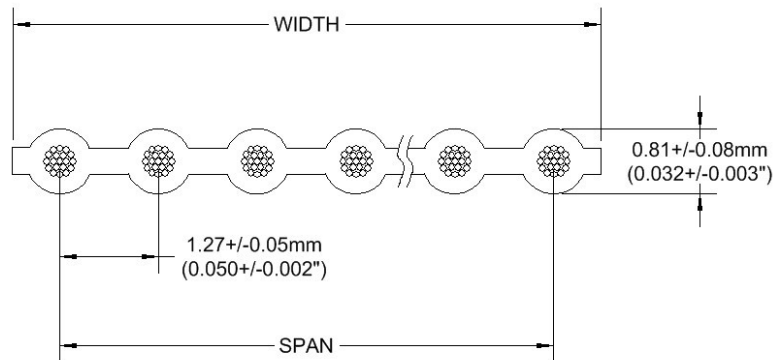

| Cond. No. | Part Number | Span                             | Width                           |
|-----------|-------------|----------------------------------|---------------------------------|
| 10        | 1000570483  | 11.4 ± 0.18mm<br>(0.450 ± .007)  | 12.7 ± 0.18mm<br>(0.500 ± .007) |
| 15        | 1000570455  | 17.8 ± 0.18mm<br>(0.700 ± .007)  | 19.0 ± 0.18mm<br>(0.750 ± .007) |
| 16        | 1000570126  | 19.0 ± 0.18mm<br>(0.750 ± .007)  | 20.3 ± 0.18mm<br>(0.800 ± .007) |
| 20        | 1000570127  | 24.1 ± 0.18mm<br>(0.950 ± .010)  | 25.4 ± 0.25mm<br>(1.000 ± .010) |
| 34        | 1000570132  | 41.9 ± 0.18mm<br>(1.650 ± .010)  | 43.2 ± 0.25mm<br>(1.700 ± .010) |
| 40        | 1000570133  | 49.5 ± 0.18mm<br>(1.950 ± .010)  | 50.8 ± 0.25mm<br>(2.000 ± .010) |
| 50        | 1000570134  | 62.23 ± 0.25mm<br>(2.450 ± .010) | 63.5 ± 0.25mm<br>(2.500 ± .010) |

| CHARACTERISTICS              |                                                                   |
|------------------------------|-------------------------------------------------------------------|
| Conductor                    | 26 AWG, 19/34 Stranded, Silver Plated High Strength Copper Alloy. |
| Insulation                   | FEP                                                               |
| Color                        | Blue (Optional: Rainbow, 0.035+/-0.003")                          |
| Impedance (ohms)             | 100 Unbalanced                                                    |
| Capacitance (pF/ft)          | 12.0 Unbalanced                                                   |
| Inductance (uH/ft)           | 0.12 Unbalanced                                                   |
| Insulation Resistance (Mohm) | >500                                                              |
| Voltage Rating               | 300V                                                              |
| Temperature Rating           | -55°C to 200°C                                                    |

### **PACKAGING**

150 ft./spool , 20 ft. Minimum Length.

**UL Style 20424**