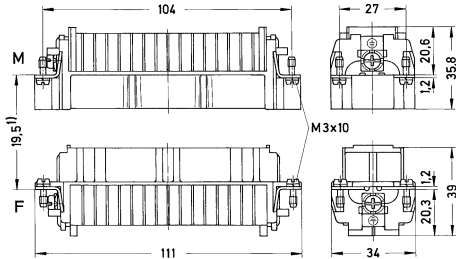


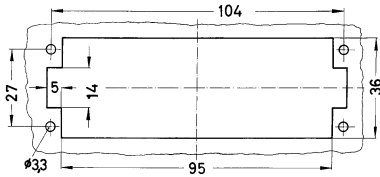


Number of contacts

64+ 

10 A 250 V 4 kV 3

Han
D/DD

Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
Han D®, Crimp termination  Please order crimp contacts separately.	0.14 ... 2.5	09 21 064 3001	09 21 064 3101	 1) distance for contact max. 21 mm
Han D®, Wrap termination, Contact surface: Silver plated 		09 21 064 2601	09 21 064 2701	 Contact arrangement (view from termination side)  Panel cut out for use without Hoods/Housings