
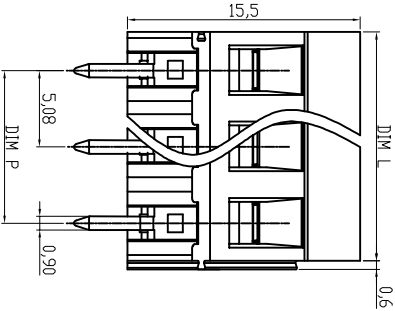
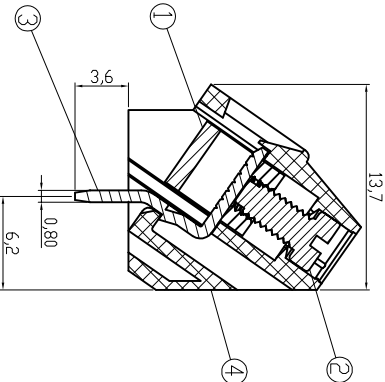
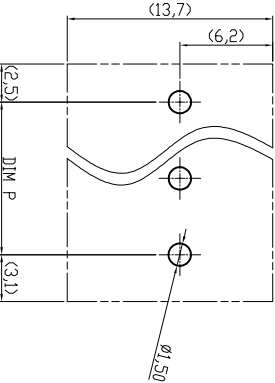


	1	2	3	4	5	6	7																																				
A	Material ①Clamp: Brass, NI plated ②Terminal screw: Steel Zinc plating "-" slot type ③Wire guard solder pin: Brass, Tin plated ④Terminal housing: Thermoplastic (UL94V-0) , GREEN Electrical UL Voltage rating: 300VAC Current rating: 10A Wire range: Solid wire(AWG): 12-24 Stranded wire(AWG): 12-24 Torque(lb-in): 3.5 Screw: M2.5 Wire strip length: 6-7mm Withstanding Voltage: 1.6KV Operating temperature: -40°C to +115°C Soldering temperature: 250°C±10°C/5 Sec Safety Approval: 							A																																			
B								B																																			
C	  ① ② ③ ④							C																																			
D								D																																			
E	DIMENSION <table><tr><td>L</td><td>Nx5.08</td></tr><tr><td>P</td><td>(N-1)x5.08</td></tr></table> N=Number of poles <table><tr><td>Poles</td><td>Tolerance</td></tr><tr><td></td><td>DIM L&DIM P</td></tr><tr><td>4p-8p</td><td>±0.15</td></tr><tr><td>9p-14p</td><td>±0.25</td></tr><tr><td>15p-20p</td><td>±0.35</td></tr><tr><td>21p-24p</td><td>±0.40</td></tr></table>							L	Nx5.08	P	(N-1)x5.08	Poles	Tolerance		DIM L&DIM P	4p-8p	±0.15	9p-14p	±0.25	15p-20p	±0.35	21p-24p	±0.40	E																			
L	Nx5.08																																										
P	(N-1)x5.08																																										
Poles	Tolerance																																										
	DIM L&DIM P																																										
4p-8p	±0.15																																										
9p-14p	±0.25																																										
15p-20p	±0.35																																										
21p-24p	±0.40																																										
F	RECOMMENDER PCB LAYOUT							F																																			
G	ASSMANN WSW-No. A-TB508-T2xxSB							G																																			
H	Customer-No.							H																																			
Scale Free <table><tr><td>TOLERANCE</td><td></td><td>Drawn</td><td>19.04.2010</td><td>Alex</td></tr><tr><td>X.</td><td>±0.50</td><td></td><td></td><td></td></tr><tr><td>X.X</td><td>±0.30</td><td>Approved</td><td>07.04.2016</td><td>Winnie</td></tr><tr><td>X.XX</td><td>±0.10</td><td></td><td></td><td></td></tr><tr><td>DIM</td><td>TOL</td><td></td><td></td><td></td></tr><tr><td>X.°</td><td>±1°</td><td></td><td></td><td></td></tr><tr><td>Angle</td><td>TOL</td><td></td><td></td><td></td></tr></table>								TOLERANCE		Drawn	19.04.2010	Alex	X.	±0.50				X.X	±0.30	Approved	07.04.2016	Winnie	X.XX	±0.10				DIM	TOL				X.°	±1°				Angle	TOL				H
TOLERANCE		Drawn	19.04.2010	Alex																																							
X.	±0.50																																										
X.X	±0.30	Approved	07.04.2016	Winnie																																							
X.XX	±0.10																																										
DIM	TOL																																										
X.°	±1°																																										
Angle	TOL																																										
②  File No.: E349947 RoHS compliant  Drawing-No. ASS 4102 CO rev01 Replace Sheet								H																																			