

BRIDGET-S-UNI

~25° spot beam


TECHNICAL SPECIFICATIONS:

Dimensions	22.6 mm
Height	12.8 mm
Fastening	glue
Colour	metal
Box size	480 x 280 x 300 mm
Box weight	3.7 kg
Quantity in Box	1680 pcs
ROHS compliant	yes ⓘ



MATERIAL SPECIFICATIONS:



Component	Type	Material	Colour	Coating
BRIDGET-S-UNI	Reflector	PC	metal	lacquer

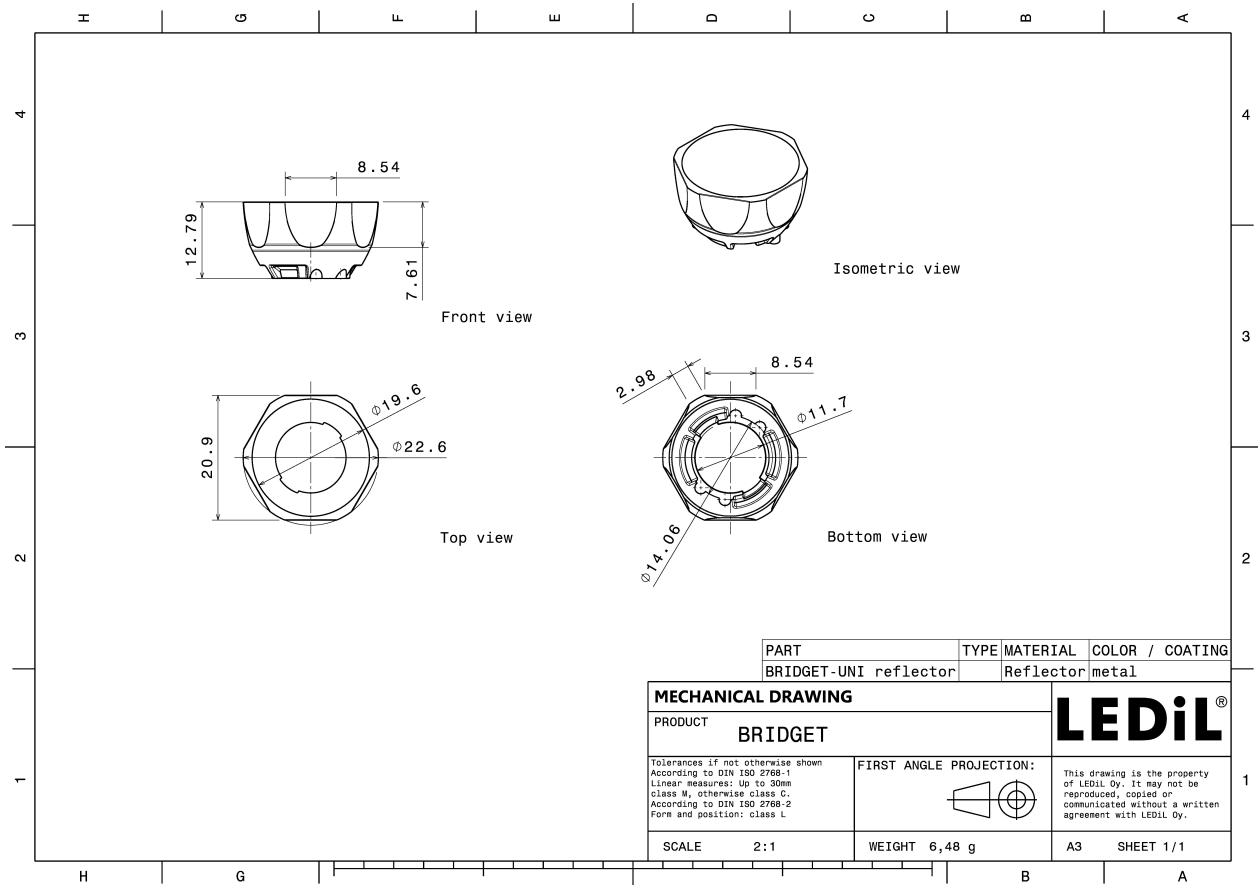

PHOTOMETRIC DATA (MEASURED):





LED BXRA ES Star
FWHM 35.0°
Efficiency 86 %
Peak intensity 1.300 cd/lm
LEDs/each optic 1
Light colour White
Required components:

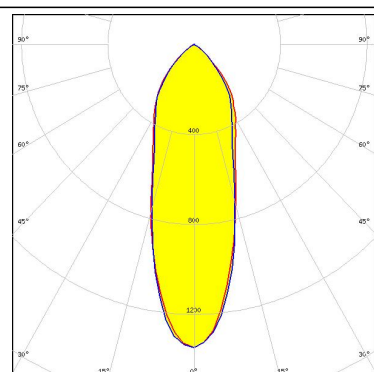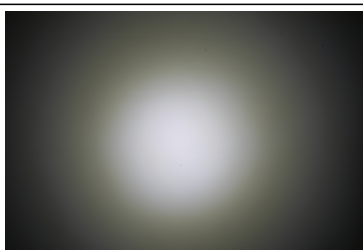



CITIZEN

LED CLL02x/CLU02x (LES10)
FWHM 44.0°
Efficiency 85 %
Peak intensity 1.100 cd/lm
LEDs/each optic 1
Light colour White
Required components:

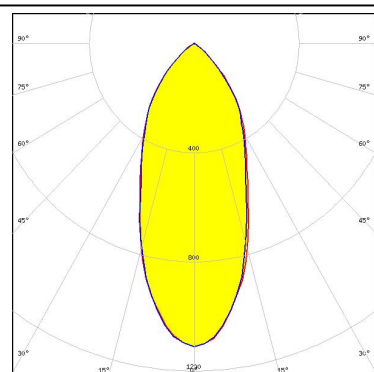
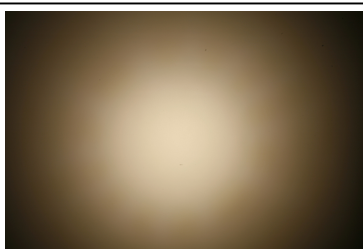


CITIZEN

LED CLU700/701
FWHM 26.0°
Efficiency 87 %
Peak intensity 1.900 cd/lm
LEDs/each optic 1
Light colour White
Required components:

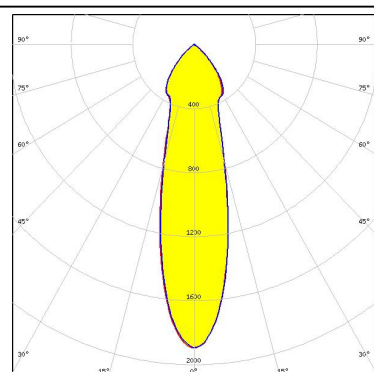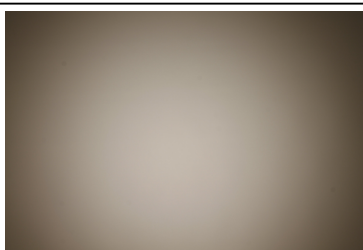

LED CXA/B 15xx
FWHM 39.0°
Efficiency 87 %
Peak intensity 1.300 cd/lm
LEDs/each optic 1
Light colour White
Required components:

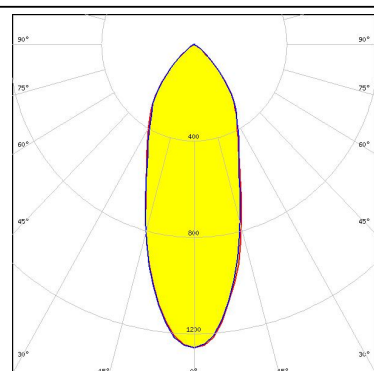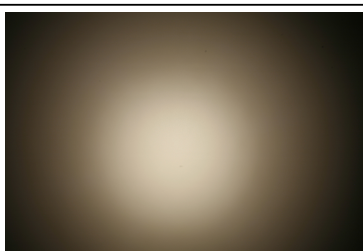



PHOTOMETRIC DATA (MEASURED):





LED XP-L HI
FWHM 14.0°
Efficiency 90 %
Peak intensity 5.000 cd/lm
LEDs/each optic 1
Light colour White
Required components:





LED LUXEON 5050 Round LES
FWHM 21.0°
Efficiency 90 %
Peak intensity 2.700 cd/lm
LEDs/each optic 1
Light colour White
Required components:

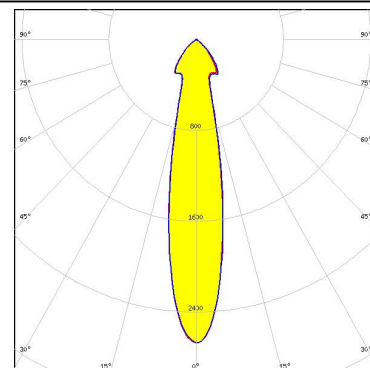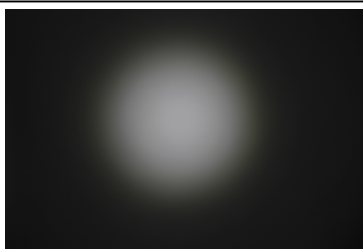

LED LUXEON V
FWHM 19.0°
Efficiency 88 %
Peak intensity 2.900 cd/lm
LEDs/each optic 1
Light colour White
Required components:

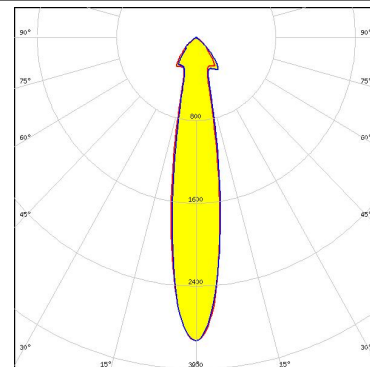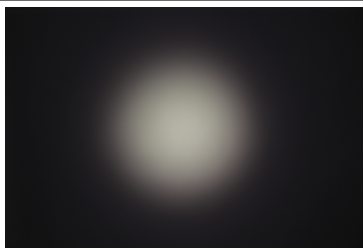



LED CxM-9 (13.5x13.5)
FWHM 45.0°
Efficiency 87 %
Peak intensity 1.100 cd/lm
LEDs/each optic 1
Light colour White
Required components:

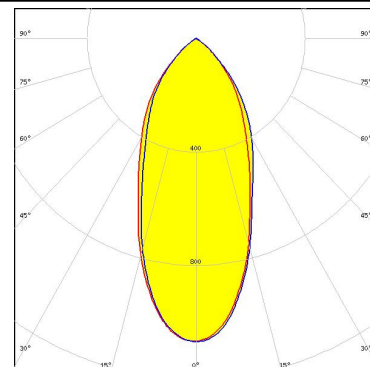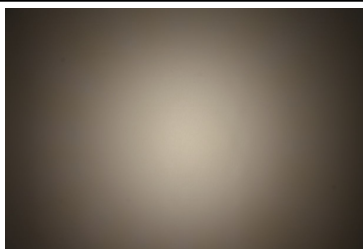

PHOTOMETRIC DATA (MEASURED):



SAMSUNG

LED COB D Series LES 9.8 mm
FWHM 44.0°
Efficiency 88 %
Peak intensity 1.100 cd/lm
LEDs/each optic 1
Light colour White
Required components:

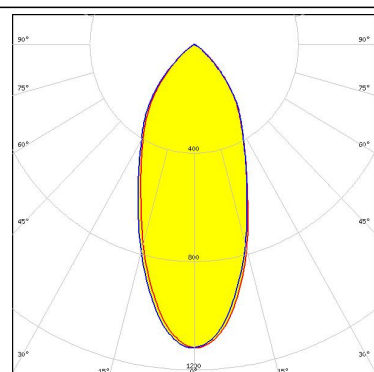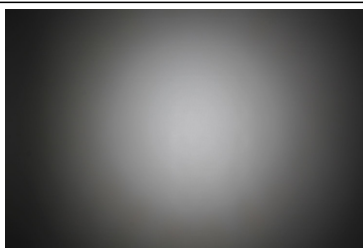



SHARP

LED Mini Zenigata (GW5BM)
FWHM 42.0°
Efficiency 87 %
Peak intensity 1.200 cd/lm
LEDs/each optic 1
Light colour White
Required components:

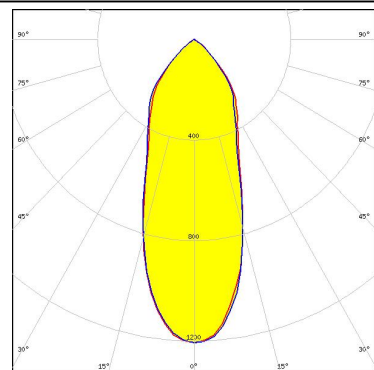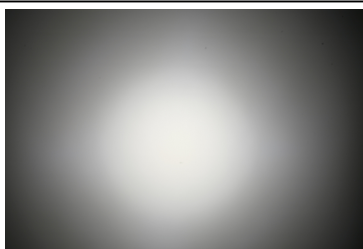



TRIDONIC

LED SLE G5 LES11
FWHM 48.0°
Efficiency 84 %
Peak intensity 0.990 cd/lm
LEDs/each optic 1
Light colour White
Required components:

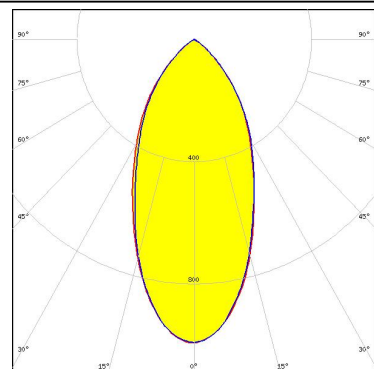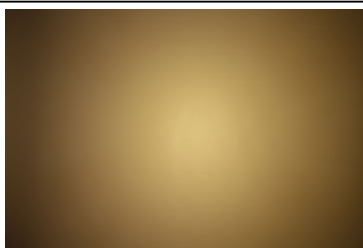

TRIDONIC


LED SLE G5 LES6
FWHM 24.0°
Efficiency 88 %
Peak intensity 2.200 cd/lm
LEDs/each optic 1
Light colour White
Required components:

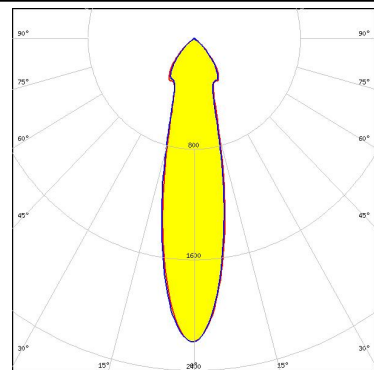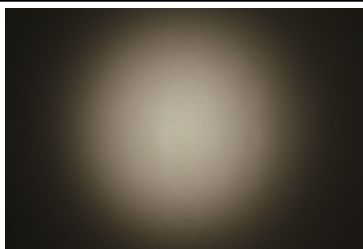


PHOTOMETRIC DATA (SIMULATED):




LED V4 HD
FWHM 24.0°
Efficiency 90 %
Peak intensity 2.428 cd/lm
LEDs/each optic 1
Light colour White
Required components:

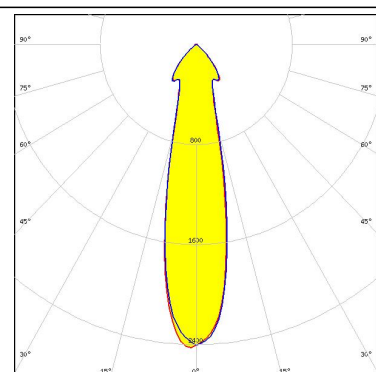


LED V6 Gen6
FWHM 22.0°
Efficiency 90 %
Peak intensity 2.490 cd/lm
LEDs/each optic 1
Light colour White
Required components:

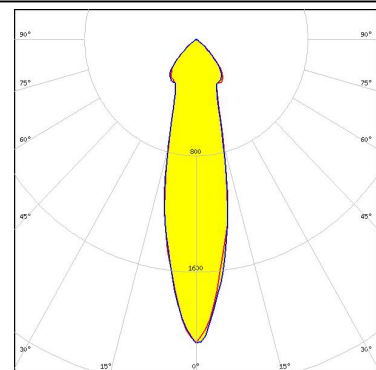

LED V6 HD
FWHM 24.0°
Efficiency 91 %
Peak intensity 2.090 cd/lm
LEDs/each optic 1
Light colour White
Required components:

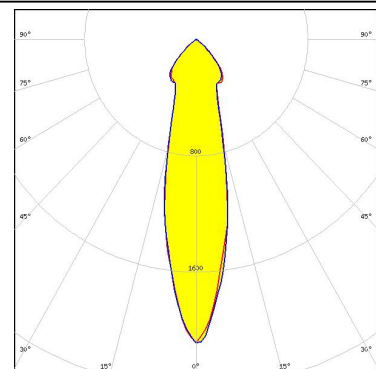


LED XHP50
FWHM 24.0°
Efficiency 90 %
Peak intensity 2.116 cd/lm
LEDs/each optic 1
Light colour White
Required components:

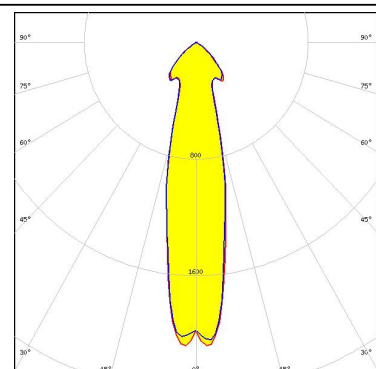

PHOTOMETRIC DATA (SIMULATED):

OSRAM
Opto Semiconductors

LED	Solericq S9
FWHM	42.0°
Efficiency	89 %
Peak intensity	1.100 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

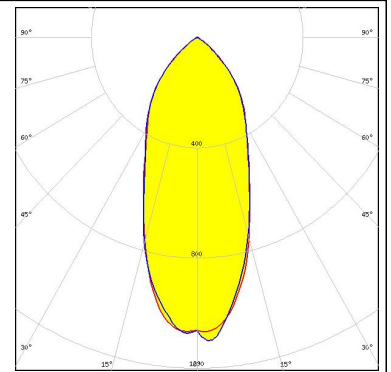

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)