


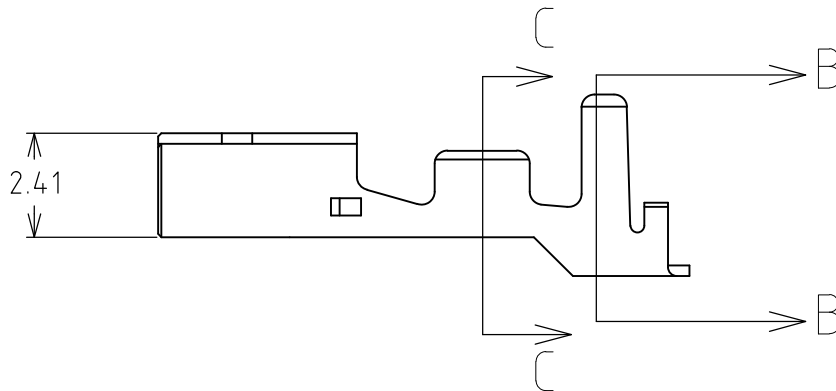

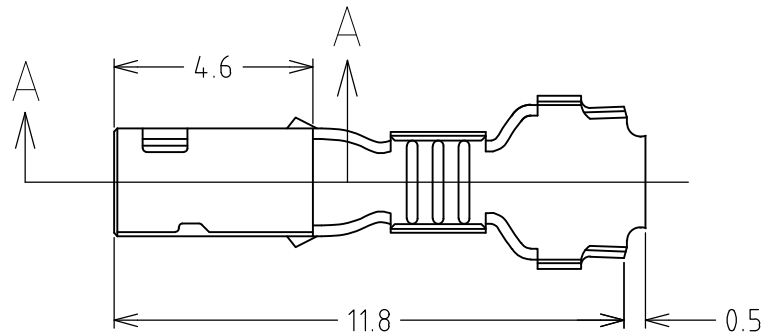


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	B3	REVISED PER ECR-20-100273	13AUG2020	M.M	D.Z



SECT C-C

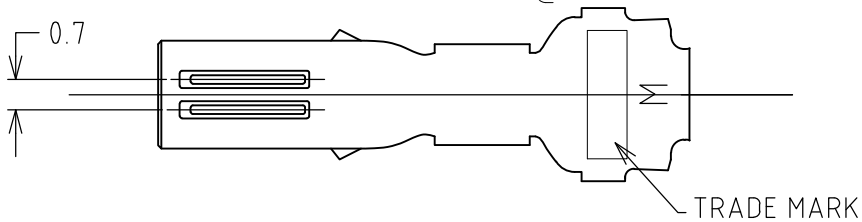

SECT B-B

SECT A-A

LUBRICANT AREA AND PERMISSIBLE
OUTSIDE THIS AREA ONLY FOR 1376348-2

AWG#24~#20 (0.22~0.53mmsq)	1.7~2.7	1376348-2
AWG#24~#20 (0.22~0.53mmsq)	1.7~2.7	1376348-1
WIER RANGE	INSULATION DIA	型番 PART NO.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

THIS DRAWING IS UNPUBLISHED.

COPYRIGHT - TE Connectivity

DIMENSIONS: mm	DWN M.SUZUKI 16MAY2008	MATERIAL PRE-TIN COPPER ALLOY	FINISH TIN
	CHK S.MANABE 19MAY08		
TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD S.MANABE 19MAY08		
0 PLG ±	PRODUCT SPEC 108-5699	NAME 5.0 POWER KEY CONNECTOR REC CONTACT (M)	
1 PLG ±	APPLICATION SPEC 114-5292		
2 PLG ± ±0.25	WEIGHT 0.000000	SIZE A4	CAGE CODE 00779
3 PLG ±	DRAWING NO C-1376348		RESTRICTED TO —
4 PLG ± ±2DEG			—
ANGLES	SCALE 6:1		SHEET 1 OF 1
CUSTOMER DRAWING		REV B3	