


Specification Sheet

Part Number: 553-50007

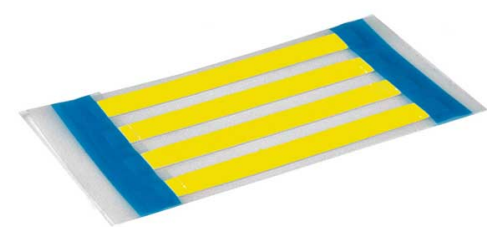

ShrinkTrak Labels, 1-Sided, 1-Slit, .125" (3.17mm), PO-X, Yellow, 500/box

|                     |                                                                                                                                                                                                                                                                                                                                                                                                                              |
|---------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Article Number      | 553-50007                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Type                | HST3-1YE-S                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Color               | Yellow (YE)                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Features & Benefits | <ul style="list-style-type: none"><li>• Slide Slit and optional center slits for easy wire insertion.</li><li>• Smooth surface for clean and legible printing.</li><li>• Supplied on a ladder style carrier so that markers can be kitted after printing.</li><li>• A 3:1 shrink ratio means fewer skews as each marker covers a wider range of wire diameters.</li></ul>                                                    |
| Quantity Per        | box                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Product Description | <p>HellermannTyton's ShrinkTrak heat shrinkable markers make it easy to mark wire, cable and other components. The military approved heat shrink tubing is flattened and assembled in a ladder style carrier system for easy printing using a thermal transfer printer. The ladder system creates a kit of markers that can be sorted, removed and applied in any order thus saving time, labor and speeding production.</p> |

|                                |                                                                           |
|--------------------------------|---------------------------------------------------------------------------|
| Short Description              | ShrinkTrak Labels, 1-Sided, 1-Slit, .125" (3.17mm), PO-X, Yellow, 500/box |
| Global Part Name               | HST3-1YE-S-PO-X-YE                                                        |
| Variant                        | Thin-Wall                                                                 |
| Width W (Imperial)             | 0.95                                                                      |
| Width W (Metric)               | 24.13                                                                     |
| Thickness T (Imperial)         | .003                                                                      |
| Thickness T (Metric)           | .0762                                                                     |
| Height H (Imperial)            | 0.235                                                                     |
| Height H (Metric)              | 5.69                                                                      |
| Width of Liner (Metric)        | 76.2                                                                      |
| Width of Liner (imperial)      | 3.0                                                                       |
| Outside Diameter OD(Imperial)  | 0.125                                                                     |
| Outside Diameter OD(metric)    | 3.2                                                                       |
| Outside Diameter Max(Imperial) | 0.125                                                                     |
| Outside Diameter Max (metric)  | 3.2                                                                       |
| Wall Thickness WT (Imperial)   | 0.031                                                                     |
| Wall Thickness WT (Metric)     | 0.79                                                                      |

|                                   |                                   |  |  |
|-----------------------------------|-----------------------------------|--|--|
| Material                          | Polyolefin, cross-linked (PO-X)   |  |  |
| Material Shortcut                 | PO-X                              |  |  |
| US MIL SPEC                       | SAE-AMS-DTL-23053/5 Class 1 and 3 |  |  |
| SAE-AS81531                       |                                   |  |  |
| MIL-STD-202G Method 215K          |                                   |  |  |
| Flammability                      |                                   |  |  |
| UL 224 VW-1                       | Halogen free                      |  |  |
| No                                | Operating Temperature (Metric)    |  |  |
| -67°F to +275°F (-55°C to +135°C) | Reach Complaint(Article 33)       |  |  |
| Yes                               | ROHS Complaint                    |  |  |
| Yes                               | Certification/Specification WEB   |  |  |
| UL 224 125 °C 600V VW-1           |                                   |  |  |
| Package Quantity(Imperial)        | 500                               |  |  |
| Package Quantity (Metric)         | 500                               |  |  |
| Customs Number                    | 3917320000                        |  |  |
| Content Unit(BMEcat)              | pack                              |  |  |
| Labels per Column                 | 1                                 |  |  |

Labels per Row

2

Weight (Metric)

0.294

Weight (Imperial)

0.64