


Specification Sheet

Part Number: 596-00257

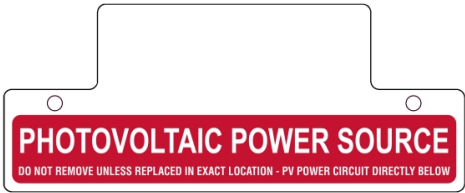

Solar Marker, Non-Adhesive, PV POWER SOURCE, 6.75" x 2.75", VL, Red, 1/pkg

Article Number	596-00257
Type	PVPSRTM
Color	Red (RD)
Features & Benefits	<ul style="list-style-type: none">• Pre-printed solar labels are made using high performance UV stable materials and adhesives for long outdoor life.• Designed to meet NEC and IFC standards for PV installation labeling, the pre-printed Solar labels come printed with the most common legends required by the AHJ (Authority Having Jurisdiction) used on large utility and scaled projects to ensure code compliance during inspection.• Labels are UV stable and made with special high bond adhesives to stick to both powder coat painted surfaces and baked enamel surfaces found on most disconnect switches and breaker boxes.• The printed inks meet the fire safety standards of the IFC (International Fire Code) and also meet the requirements of UL969 for high reflectivity and durability.
Quantity Per	EA

Product Description	HellermannTyton pre-printed Solar Installation labels are designed to meet the requirements of the National Electrical Code (NEC) International Fire Code (IFC) as well as being acceptable to the Authority Having Jurisdiction (AHJ). Labels are made with durable UV stable materials and adhesives that are designed to stick to both baked enamel and powder coat surfaces. Where applicable, labels are made using reflective materials for first responder safety. Some pre-printed labels are printable using a thermal transfer printer when variable voltage or series data must be printed and displayed.
Short Description	Solar Marker, Non-Adhesive, PV POWER SOURCE, 6.75" x 2.75", VL, Red, 1/pkg
Global Part Name	PVPSRTM-505/281-RD
Technical Description	Pre-Printed Solar Label, Reflective, Roof Top Label, 6.75" X 2.75", PV POWER SOURCE, Red
Local Order Number 2	Spanish Version: 596-00822
Length L (Imperial)	6.75
Length L (Metric)	171.4
Width W (Imperial)	6.75
Width W (Metric)	171.4
Height H (Imperial)	2.75
Height H (Metric)	69.85
Material	Type 505/281, UV Stable Reflective Vinyl with Clear Polyester Laminate

Material Shortcut

505/281

Adhesive

Acrylic

Halogen free

Yes

Adhesive Operating Temperature

-40°F to +302°F (-40°C to +150°C)

Operating Temperature (Metric)

-40°F to +174°F (-40°C to +79°C)

Reach Complaint(Article 33)

Yes

ROHS Complaint

Yes

Certification/Specification WEB

NEC2017 NEC2011 NEC2014 UL 969 IFC 2012

Warranty (US)

Yes

UL Recognized (US)

Yes

Package Quantity(Imperial)

1

Package Quantity (Metric)

1

Customs Number

3919905060

Labels per Column

1

Labels per Row

1

Weight (Metric)

0.074

Weight (Imperial)

.16

