


Specification Sheet

Part Number: T120I9H4

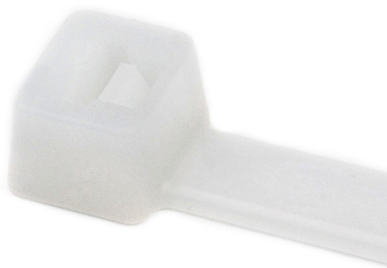

Heavy Duty Cable Tie, 11.8" Long, UL Rated, 120lb Tensile Strength, PA66, Natural, 500/pkg

|                     |                                                                                                                                                                                                                                                                                                                                                                               |
|---------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Article Number      | 111-12213                                                                                                                                                                                                                                                                                                                                                                     |
| Type                | T120I                                                                                                                                                                                                                                                                                                                                                                         |
| Color               | Natural (NA)                                                                                                                                                                                                                                                                                                                                                                  |
| Features & Benefits | <ul style="list-style-type: none"><li>•Engineered and manufactured for maximum performance and quality.</li><li>•Made from 100% high-quality plastic to ensure efficient recycling.</li><li>•Inside serration for a strong grip onto bundles.</li><li>•Easy application either manually or with a tensioning tool.</li><li>•Bent tail allows for simpler insertion.</li></ul> |
| Quantity Per        | bag                                                                                                                                                                                                                                                                                                                                                                           |
| Product Description | Heavy-Duty T-Series Cable Ties feature inside serrations to provide a positive hold on wire and cable bundles. Durable head design guarantees high tensile strength and a low insertion force. The bent tail allows quick and simple installations by hand. For high-volume applications, tensioning tools are available to ensure consistent and safe installation.          |

|                                     |                                                                                            |
|-------------------------------------|--------------------------------------------------------------------------------------------|
| Short Description                   | Heavy Duty Cable Tie, 11.8" Long, UL Rated, 120lb Tensile Strength, PA66, Natural, 500/pkg |
| Global Part Name                    | T120I-PA66-NA                                                                              |
| Minimum Tensile Strength (Imperial) | 120.0                                                                                      |
| Minimum Tensile Strength (Metric)   | 535.0                                                                                      |
| Length L (Imperial)                 | 11.8                                                                                       |
| Length L (Metric)                   | 300.0                                                                                      |
| Identification Plate Position       | none                                                                                       |
| Releasable Closure                  | No                                                                                         |
| Tie Closure                         | plastic pawl                                                                               |
| Variant                             | Inside Serrated                                                                            |
| Width W (Imperial)                  | 0.30                                                                                       |
| Width W (Metric)                    | 7.6                                                                                        |
| Bundle Diameter Min (Imperial)      | 0.20                                                                                       |
| Bundle Diameter Min (Metric)        | 5.0                                                                                        |
| Bundle Diameter Max (Imperial)      | 3.2                                                                                        |
| Bundle Diameter Max (Metric)        | 81.3                                                                                       |

|                                 |                                                        |
|---------------------------------|--------------------------------------------------------|
| Thickness T (Metric)            | 1.6                                                    |
| Cable Tie Width Max (Imperial)  | 0.3                                                    |
| Cable Tie Width Max (Metric)    | 7.61                                                   |
| Material                        | Polyamide 6.6 (PA66)                                   |
| Material Shortcut               | PA66                                                   |
| Flammability                    | UL 94 V2                                               |
| Halogen free                    | Yes                                                    |
| Operating Temperature (Metric)  | -40°F to +185°F (-40°C to +85°C)                       |
| ROHS Complaint                  | Yes                                                    |
| Certification/Specification WEB | UL   ANSI/UL 62275 UL   ANSI/UL 1565 UL   ANSI/UL 746B |
| UL Recognized (US)              | Yes                                                    |
| UL Listed (US and Canada)       | Yes                                                    |
| UL Recognized (US and Canada)   | Yes                                                    |
| UL Listed (US                   | Yes                                                    |
| Package Quantity(Imperial)      | 500                                                    |

Package Quantity (Metric)

500

Customs Number

3926909988