


Wire Wound Power Common Mode Filter WCM7060FASV-SERIES-LM

1. Features

1. High reliability -Reliability tests comply with AEC-Q200
2. Operating temperature-40~+125°C (Including self - temperature rise)



2. Dimension

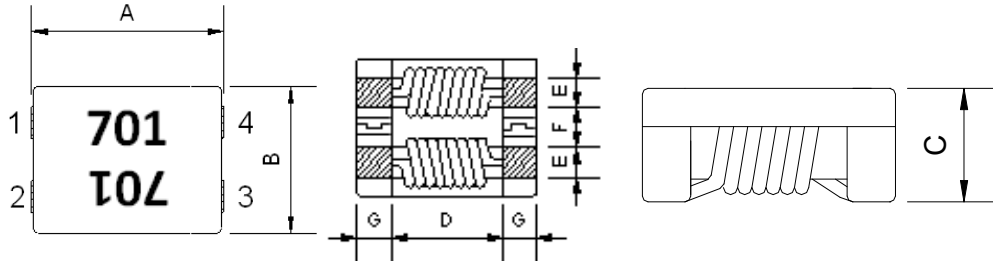

Series	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)	G(mm)
WCM7060	7.0±0.5	6.0±0.5	3.8 max.	3.5 typ.	1.5±0.5	1.5±0.5	1.7±0.5

Unit:mm

3. Part Numbering

WCM	7060	F	A	S	V	-	701	-	LM
A	B	C	D	E	F		G		H

A: Series	
B: Dimension	
C: Material	Ferrite Core
D: Process	Assembled
E: Type	S=Shielded , N=Unshielded
F: Category Code	V=Vehicle
G: Impedance	701=700Ω
H: Laser Marking	

4. Specification

TAI-TECH Part Number	Impedance (Ω)		Test Frequency (MHz)	DC Resistance (mΩ) max. (1 line)	Rated Current (A) max.	Rated Volt. (Vdc) max.	Insulation Resistance (MΩ) min.
	min.	typ.					
WCM7060FASV-400-LM	40	70	100	5	15	80	10
WCM7060FASV-101-LM	100	140	100	10	9	80	10
WCM7060FASV-301-LM	225	300	100	10	5	80	10
WCM7060FASV-501-LM	400	500	100	10	5	80	10
WCM7060FASV-701-LM	500	700	100	15	4	80	10
WCM7060FASV-102-LM	800	1020	100	17	3	80	10
WCM7060FASV-132-LM	910	1300	100	20	3	80	10

Note:

- Samples Quantity : 10 pcs
- Measurement board data
 - Material : FR4
 - Board dimensions : 100 X 50 X 1.6t mm
 - Pattern dimensions: 45 X 30 mm (Double side board)
 - Pattern thickness : 50 μm
- All test data referenced to 25°C ambient

