


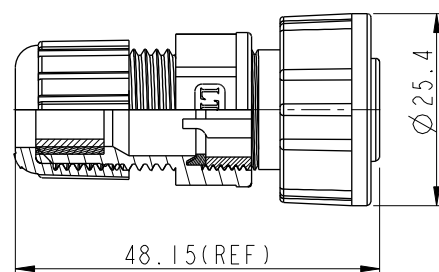
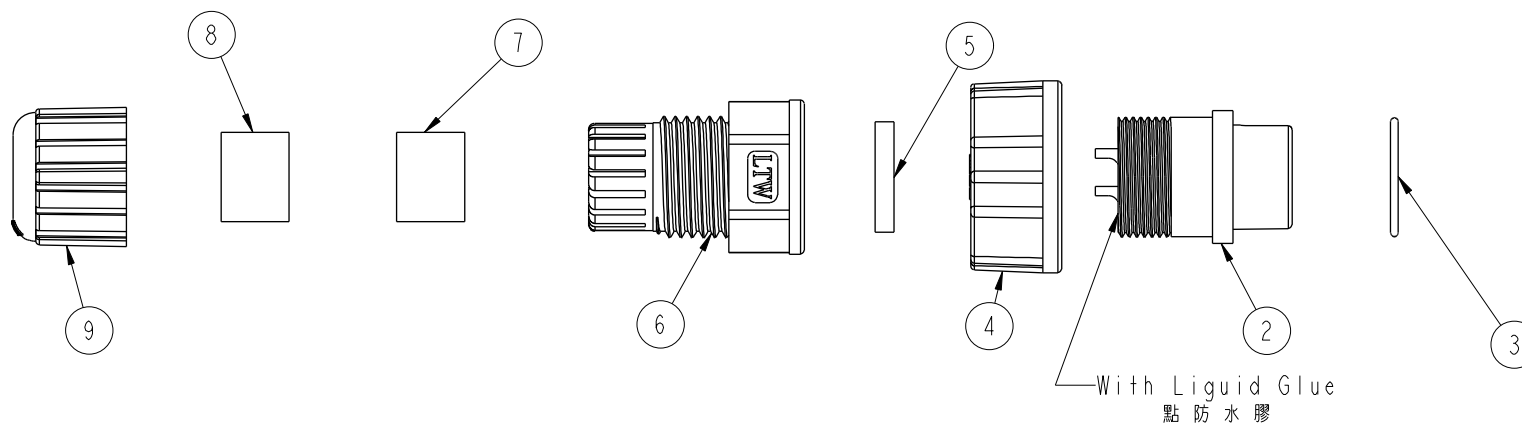


1	2	3	4	5	6	7	8
REV.	ECN NO.	DATE	SIGN	DESCRIPTION			



Pin Assignments
Front View 前視圖



Note:

- * (QC) Important Dimension T Check.
(QC) 為重點尺寸)
- * Waterproof Rate : IP67
- * Seals B1 for Cable OD: $\varnothing 7.6\text{mm} \sim \varnothing 9.6\text{mm}$
(防水墊圈B1線徑: $\varnothing 7.6\text{mm} \sim \varnothing 9.6\text{mm}$)
- * Seals B2 for Cable OD: $\varnothing 4.0\text{mm} \sim \varnothing 7.6\text{mm}$
(防水墊圈B2線徑: $\varnothing 4.0\text{mm} \sim \varnothing 7.6\text{mm}$)
- * One Set Unassembled in one PE Bag
(每一組未組裝, 放置於一個PE袋, 並封口)
- * Ring: Black, EPDM
- * Housing: Black, Nylon+GF
- * Pin: Copper Alloy, Gold Plated
- * Screw Nut: Black, Nylon+GF
- * Gasket : Black, EPDM
- * Seals : Black, EPDM
- * Clamp Ring: Black, Nylon
- * Sealing Nut: Black, Nylon
- * Liquid Glue: Clear

UNIT:mm		TITLE Middle Assy Screw 4Pin F Conn M Pin		Amphenol LTW		ITEM NO CB-04BFMA-SL7001	DRAWN BY SamChang	DATE 2012-04-03
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°		SCALE 1:1	SIZE A4	SHEET 1 OF 1		DWG NO CB-04BFMA-SL7001	CHECKED BY Jeffrey	DATE 2012-04-24
REV. A		WC-REV. A.3	(QC): Inspection item		CUSTOMER ALTW		APPROVED BY Lion	DATE 2012-04-24

安費諾亮泰企業股份有限公司