

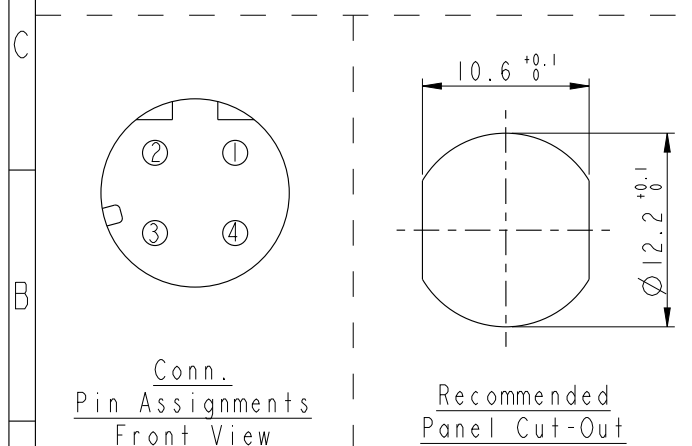
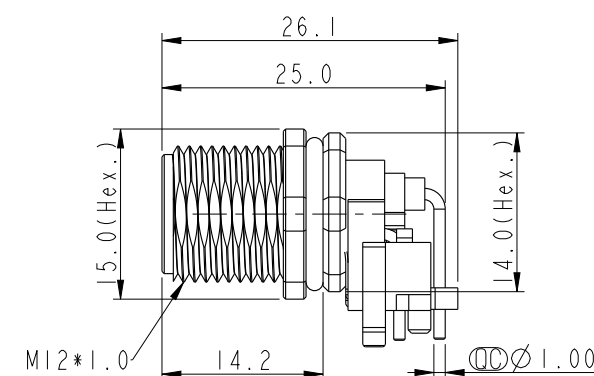

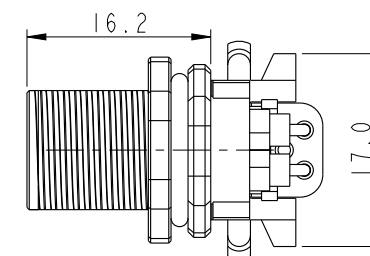



REV.	ECN NO.	DATE	SIGN	DESCRIPTION

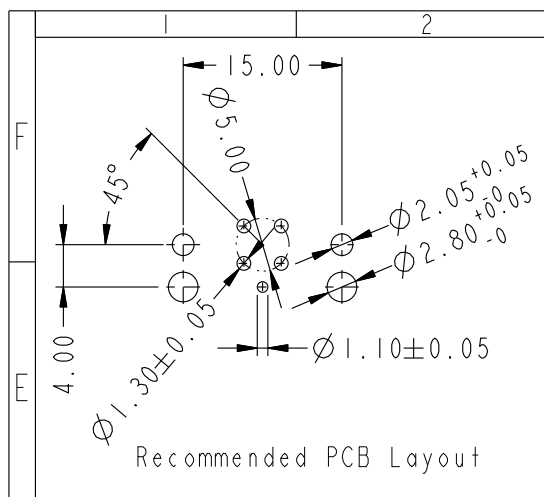

Note:

- * $\varnothing$ Important Dimension To Check
- * Waterproof Rate: IP67 (Mated Waterproof)
- * Connector: PBT+PC, Black
- * Male Pin: Copper Alloy, Gold Plated
- * Shell: Zinc Alloy, Nickel Plated
- * Nut: Zinc Alloy, Nickel Plated
- * Grounding Pin: Copper Alloy, Tin Plated
- * O-Ring1: Silicone, Black
- * O-Ring2: Silicone, Gray
- * Pin Holder: PBT+PC, Black
- * For Panel Thickness Max. 3.0mm
- * For PCB Thickness Max. 1.5mm

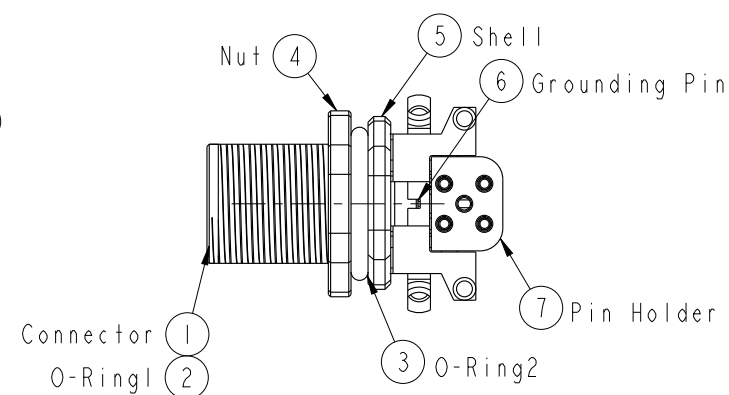

UNIT:mm		TITLE M12, 90° Panel, w/o Grounding Pin 4Pin M Conn M Pin		ITEM NO MSDS-04PMMR-SF7003		DRAWN BY Yulong_wang		DATE 2016-12-11	
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°		SCALE 3:2		DWG NO MSDS-04PMMR-SF7003		CHECKED BY Jinhai		DATE 2016-12-11	
REV. A		WC-REV. A.2		CUSTOMER ALTW		APPROVED BY Jerry		DATE 2016-12-11	
SHEET 1 OF 1		QC: Inspection item		Amphenol LTW 安費諾亮泰企業股份有限公司		8		FMW10702-01-02A1	