

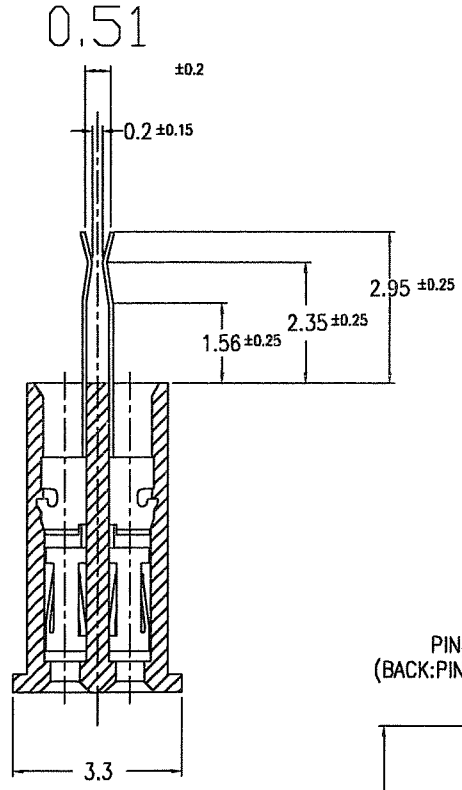
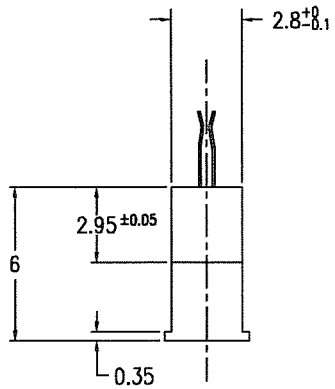
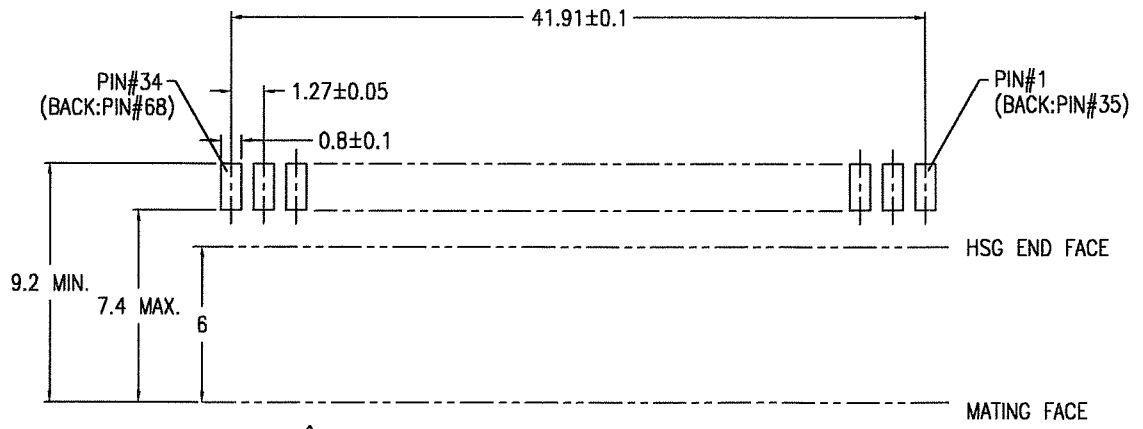


PRODUCT No.	PLUG HSG COLOR
90935-003	BLACK
90935-003LF	BLACK

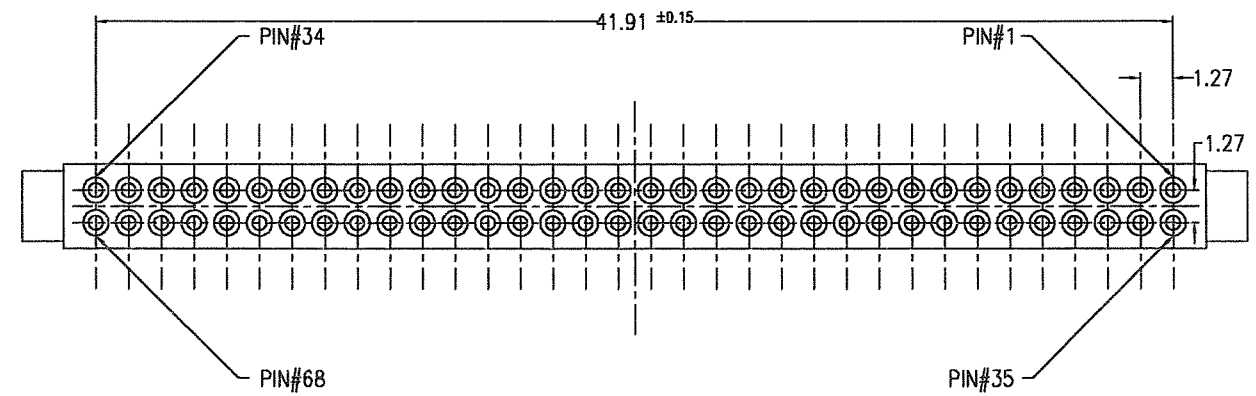

SECTION "C"-"C"

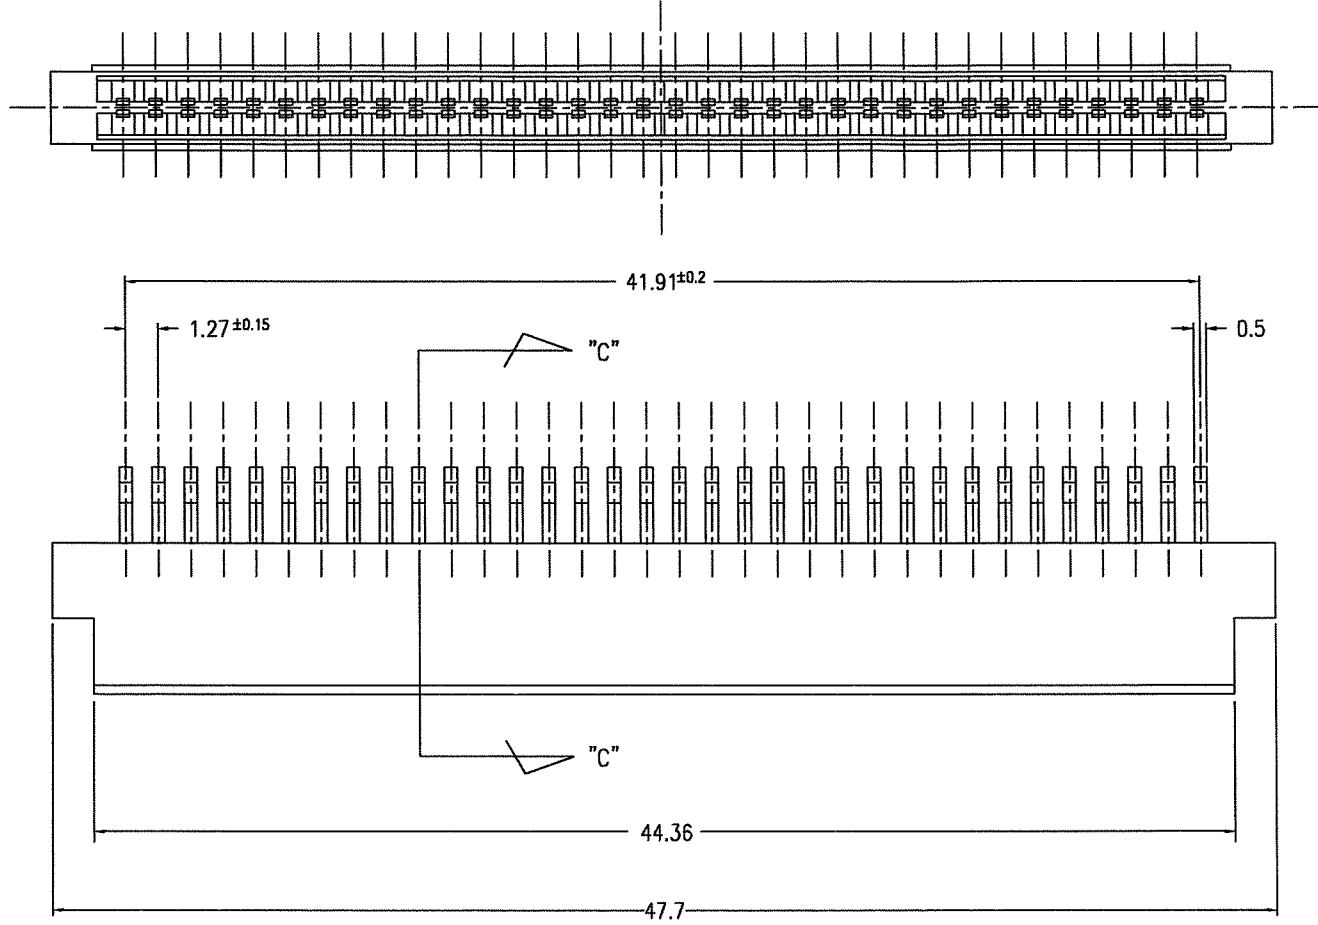

RECOMMENDED PWB FOOTPRINT LAYOUT

HSG END FACE
MATING FACE

NOTE

- MATERIAL
CONTACT : Be-Cu 0.08t
HSG : GLASS FILLED LCP UL94V-0
FINISH
CONTACT : ALL OVER ----- Ni UNDER 0.5μm THK. MIN.
SELECTIVE ----- Au PLATING 0.1μm THK. MIN.
OVER Pd-Ni PLATING.
SOLDER TAIL ---- TIN LEAD 2.5μm THK. MIN.
OR
Au FLASH FOR LF SUFFIX PARTS NUMBER.
- FOR MATING MALE CONN.(HDR./EJECTOR HDR.)
TO APPLY 68POS. MALE CONN.(HDR./EJECTOR HDR.)BASED ON
JEIDA AND PCMCIA SPECIFICATION.
- GENERAL TOLERANCE : ±0.1
- RECOMMENDED PWB THICKNESS : 0.1 TO 0.4
- FOR LEAD FREE P/N, THE PRODUCT MEETS EUROPEAN UNION
DIRECTIVES AND OTHER COUNTRY REGULATIONS AS
DESCRIBED IN GS-22-008.

mat'l. code					surface	tolerance	projection	product family	CODE
---					ISO 1302	ISO 406	ISO 1101	5B1F PCMCIA Receptacle	JP
ltr	description	ecn no	dr	date	tolerances unless otherwise specified	angles	linear	title	
A	RELEASED	J20031	MK	2/1/02	0.X			JEIDA/PCMCIA	
B	REVISED	J20210	KS	7/1/02	0.XX			68 POS. RECEPTACLE	
C	REVISED	J40024	KS	2/25/04	0.XXX				
D	REVISED	J06-0268	R.S	7/10/06					
					dr	R.SHOUJI	6/27/06	dwg no	sheet 1 of 1 size
					enrg	R.SHOUJI	7/10/06	90935	A2
					chr				
					appd	S. Nakamura	7/10/06		
sheet	revision	D						type	PRODUCT CUSTOMER Drawing
index	sheet	1							Rev. D