Auf dem Schüffel 1
D-58513 Lüdenscheid
Tel.: +49-2351 - 5542-00
Fax +49 (2351) 554-861
info@assmann-wsw.com
www.assmann-wsw.com

PRODUCT CHANGE NOTIFICATION (PCN)

ISSUE DATE: 25/4/2022
MODIFICATION / REVISION DATE: 25/4/2022

DK-1611-010/BL
MODULAR CABLE

CHANGE NOTIFICATION: PCN 20220425_DK-1611-010/BL

DESCRIPTION OF CHANGES:
CHANGE OF DATA SHEET
CHANGE OF DATA SHEET
New Draw.-No. ASS_7510_CArev01

REASON FOR CHANGE:
CHANGE OF PRODUCT LOCATION
CHANGE OF PRODUCT LOCATION

KEY CHARACTERISTICS OF CHANGE: Details see page 3

PRODUCTS AFFECTED: DK-1611-010/BL

DATE OF CHANGE AND IMPLEMENTATION:
CHANGE: WEEK 18 / YEAR 2022
IMPLEMENTATION: 25/4/2022

RESPONSE: NO RESPONSE TO THIS NOTIFICATION IS REQUIRED

PCN REVISION HISTORY:
DATE OF REVISION: 25/4/2022 REVISION NUMBER: 00

Auf dem Schüffel 1
D-58513 Lüdenscheid
Tel.: +49-2351 - 554-200
Fax +49 (2351) 554-861
info@assmann-wsw.com
www.assmann-wsw.com

PRODUCT CHANGE NOTIFICATION (PCN)

ISSUE DATE: 25/4/2022
MODIFICATION / REVISION DATE: 25/4/2022

DK-1611-010/BL
DOCUMENT: DRAWING

ASSMANN WSW P/N	Drawing Number		ASSMANN WSW P/N	Drawing Number
DK-1611-010/BL	ASS_7510_CArev00	↔	DK-1611-010/BL	ASS_7510_CArev01

PCN REVISION HISTORY:
DATE OF REVISION: 25/4/2022 REVISION NUMBER: 00

Auf dem Schüffel 1
D-58513 Lüdenscheid
Tel.: +49-2351 - 554-200
Fax +49 (2351) 554-861
info@assmann-wsw.com
www.assmann-wsw.com

PRODUCT CHANGE NOTIFICATION (PCN)

ISSUE DATE: 25/4/2022
MODIFICATION / REVISION DATE: 25/4/2022

DK-1611-010/BL OLD VERSION	DK-1611-010/BL NEW VERSION
Apprearance	Apprearance

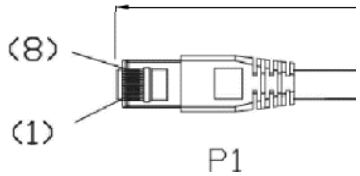

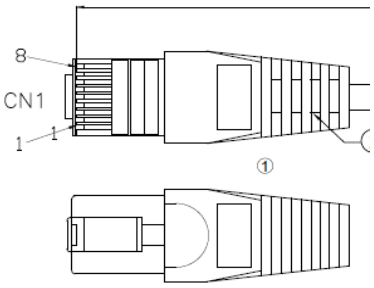

BOM

Material:
- Conductor: 24AWG 7*0.19±0.015mm
- Conductor Insulation color coding: (1) White/Orange, (1) Orange, (1) White/Green, (1) Green, (1) Blue, (1) White/Blue, (1) White/Brown, (1) Brown
- Cable jacket printing: DIGITUS Cat6 U-UTP PATCH CORD ISO/IEC 11801 & TIA/EIA 568-B.2-1 24AWGx4p CM(UL) C(UL)
- Wiring T568B Color
- P1 & P2 Contact plug: RJ45 8P8C 3μ pc UL 94V-2

BOM

①	3	Molding PVC	2	Molding PVC 65P
①	2	RJ45 CONN	2	RJ45 8P8C, contacts 3u" gold-plated Un-shielded PC UL94V-2
①	1	CABLE	1	CAT 5E U/UTP(24AWGx1PR)*4+PVC Jacket OD:5.6±0.3mm
	NO.	NAME.	Q'TY	SPECIFICATION

FOR DETAIL, PLEASE TAKE ATTACHED NEW DRAWING: FOR REFERENCE

PCN REVISION HISTORY:
DATE OF REVISION: 25/4/2022 REVISION NUMBER: 00

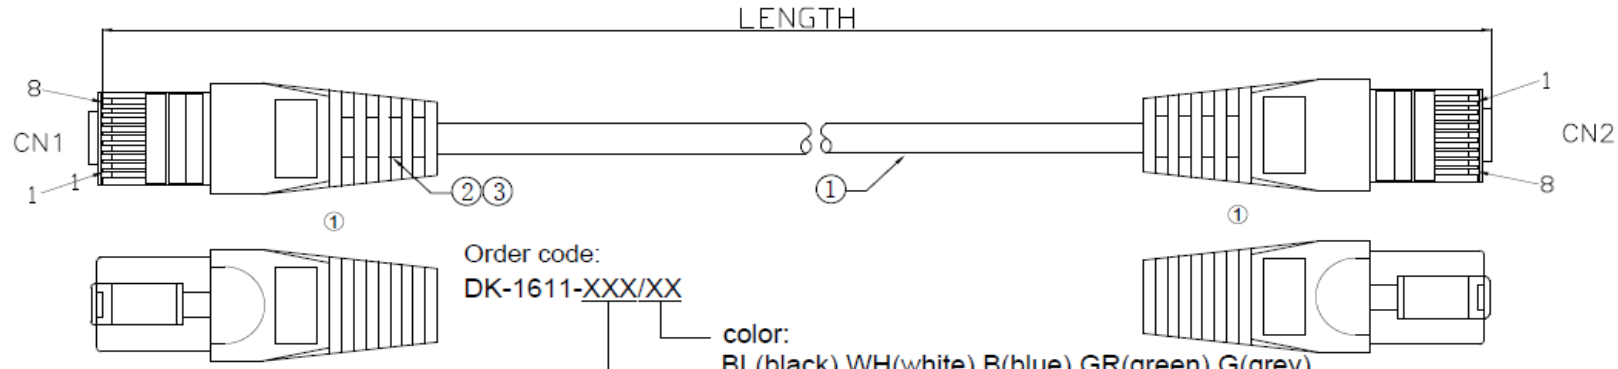

Order code:
DK-1611-XXX/XX

color:
BL(black),WH(white),B(blue),GR(green),G(grey)

Length: see table ①

Length	Feet	mm	tolerance (mm)
001	1	305	+30.5/-15.3
003	3	914	+45.8/-36.6
005	5	1524	±45.8
007	7	2134	±64.1
010	10	3048	±91.5
015	15	4572	±137.3
020	20	6096	±183
025	25	7620	±228.8
050	50	15240	±457.5
100	100	30480	±915

PIN OUT

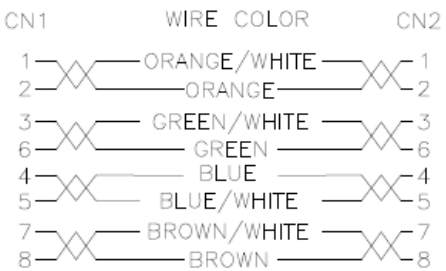

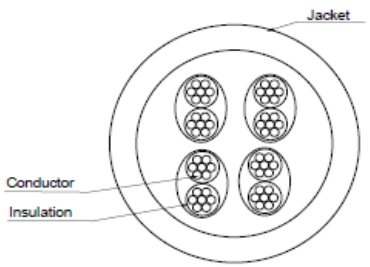

Electrical
Open/short/intermittence:100%
Dielectric strength: 2.5KV DC-2seconds.
The operating temperature: -20°C~+60°C

		NO.	NAME.	Q'TY	SPECIFICATION
①	3	Molding PVC	2	Molding PVC 65P
①	2	RJ45 CONN	2	RJ45 8P8C, contacts 3u" gold-plated Un-shielded PC UL94V-2
①	1	CABLE	1	CAT 5E U/UTP(24AWGx1PR)*4+PVC Jacket OD:5.6±0.3mm

RoHS compliant
Unit: mm

Scale	FREE
TOLERANCE	
DIM	TOL
Angle	TOL

Id.	Modification	Date	Name
①	Change the plant	12.04.2022	Luca
⓪	Drawn	15.12.2015	Joanna

	Date	Name
Drawn	15.12.2015	Joanna
Approved	12.04.2022	Luca

ASSMANN WSW components

Customer-No.

ASSMANN WSW-No.
DK-1611-XXX/X

Drawing-No.
ASS 7510 CA

rev01

Replace

Sheet