


Data sheet

2698.3 AP 2,5/l OG

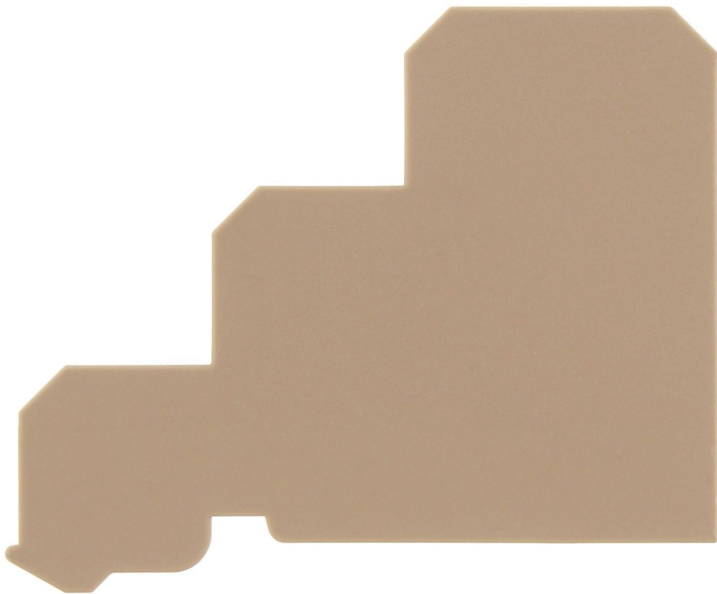

End plate, Colour: Orange

Business data

Article number	2698.3
Article name	AP 2,5/l OG
GTIN (EAN)	4044211151669
Packaging unit	20
Quantity unit	PC
Weight per piece (not including packaging)	3.5 g
Weight per piece (including packaging)	3.6 g
Unit of weight	G
Customs number	85389099
Country of origin	DE
Prio-Article	2698.2
Product description	End plate

Data sheet

2698.3 AP 2,5/I OG

Technical data

Dimensions

Length	59.85 mm
--------	----------

Materials

Material	Polyamide 6.6
Flammability class UL 94	V-2
Working temperature, min.	-40 °C
Working temperature, max.	105 °C

Further technical data

Designed as end plate	✓
Snap-on available	✓


Environmental Product Compliance

REACH Conform	yes
REACH Reference date	2022-06-10
REACH Candidate Substance Note	No
RoHS Conform	yes

Media


Accessories

##INVERSE##CONTA-CONNECT




Three-level initiator terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 2.5 mm², Width: 5 mm, Colour: Beige

Article number	Article name	GTIN (EAN)	Packaging unit
<u>1271.2</u>	IK 2,5 PNP/DC/LED(RD)/48V BG	4044211037512	100 ST




Three-level initiator terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 2.5 mm², Width: 5 mm, Colour: Beige

Article number	Article name	GTIN (EAN)	Packaging unit
<u>1260.2</u>	IK 2,5 BG	4044211035228	100 ST




Three-level initiator terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 2.5 mm², Width: 5 mm, Colour: Beige

Article number	Article name	GTIN (EAN)	Packaging unit
<u>1263.2</u>	IK 2,5 PNP/DC/LED(GN)/24V BG	4044211035860	100 ST




Three-level initiator terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 2.5 mm², Width: 5 mm, Colour: Beige

Article number	Article name	GTIN (EAN)	Packaging unit
<u>1274.2</u>	IK 2,5 PNP/DC/LED(GN)/60V BG	4044211037628	100 ST



Three-level initiator terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 2.5 mm², Width: 5 mm, Colour: Beige

Article number	Article name	GTIN (EAN)	Packaging unit
<u>1275.2</u>	IK 2,5 PNP/AC/LED(RD)/220V BG	4044211037734	100 ST




Three-level initiator terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 2.5 mm², Width: 5 mm, Colour: Beige

Article number	Article name	GTIN (EAN)	Packaging unit
<u>1280.2</u>	IK 2,5 NPN/DC/LED(GN)/60V BG	4044211038373	100 ST

Data sheet


2698.3 AP 2,5/I OG

##INVERSE##CONTA-CONNECT




Three-level initiator terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 2.5 mm², Width: 5 mm, Colour: Beige

Article number	Article name	GTIN (EAN)	Packaging unit
<u>1282.2</u>	IK 2,5 NPN/AC/LED(GN)/220V BG	4044211038663	100 ST




Three-level initiator terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 2.5 mm², Width: 5 mm, Colour: Beige

Article number	Article name	GTIN (EAN)	Packaging unit
<u>1264.2</u>	IK 2,5 NPN/DC/LED(RD)/24V BG	4044211036072	100 ST




Three-level initiator terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 2.5 mm², Width: 5 mm, Colour: Beige

Article number	Article name	GTIN (EAN)	Packaging unit
<u>1277.2</u>	IK 2,5 NPN/DC/LED(RD)/48V BG	4044211037918	100 ST




Three-level initiator terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 2.5 mm², Width: 5 mm, Colour: Beige

Article number	Article name	GTIN (EAN)	Packaging unit
<u>1278.2</u>	IK 2,5 NPN/DC/LED(GN)/48V BG	4044211038021	100 ST




Three-level initiator terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 2.5 mm², Width: 5 mm, Colour: Beige

Article number	Article name	GTIN (EAN)	Packaging unit
<u>1281.2</u>	IK 2,5 NPN/AC/LED(RD)/220V BG	4044211038557	100 ST



Three-level initiator terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 2.5 mm², Width: 5 mm, Colour: Beige


Article number	Article name	GTIN (EAN)	Packaging unit
<u>1262.2</u>	IK 2,5 PNP/DC/LED(RD)/24V BG	4044211035655	100 ST



Three-level initiator terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 2.5 mm², Width: 5 mm, Colour: Beige


Article number	Article name	GTIN (EAN)	Packaging unit
<u>1265.2</u>	IK 2,5 NPN/DC/LED(GN)/24V BG	4044211036287	100 ST

##INVERSE##CONTA-CONNECT




Three-level initiator terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 2.5 mm², Width: 5 mm, Colour: Beige

Article number	Article name	GTIN (EAN)	Packaging unit
<u>1272.2</u>	IK 2,5 PNP/DC/LED(GN)/48V BG	4044211037567	100 ST




Three-level initiator terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 2.5 mm², Width: 5 mm, Colour: Beige

Article number	Article name	GTIN (EAN)	Packaging unit
<u>1276.2</u>	IK 2,5 PNP/AC/LED(GN)220V BG	4044211037840	100 ST



Three-level initiator terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 2.5 mm², Width: 5 mm, Colour: Beige

Article number	Article name	GTIN (EAN)	Packaging unit
<u>1279.2</u>	IK 2,5 NPN/DC/LED(RD)/ 60V BG	4044211038168	100 ST



Three-level initiator terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 2.5 mm², Width: 5 mm, Colour: Beige

Article number	Article name	GTIN (EAN)	Packaging unit
<u>1273.2</u>	IK 2,5 PNP/DC/LED(RD)/60V BG	4044211037574	100 ST