

ISSUE DATE	SAMPLES AVAILABLE	RTR	MASS PRODUCTION	NOTIFICATION NO.
23 Oct. 2020	Nov. 2020	Dec. 2020	March 2021	PCN-2020-10-23-02-LG52

**This is to advise you about the following design change.**

**PRODUCT ID (DESCRIPTION):**

LCD Modules: LQ121K1LG52, LQ121K1LG52A/T and LQ121K1LG52C.

**DESCRIPTION OF CHANGE:**

Sharp is updating the design of the LQ121K1LG52, LQ121K1LG52A/T and LQ121K1LG52C due to a part number change for the following components: LED Driver IC and T-CON IC. See Tables I - III on pages 2 - 3 of this document for details.


**EFFECT OF CHANGE:**

This update will result in NO CHANGE to form, fit, function, reliability, or specification for the LQ121K1LG52, LQ121K1LG52A/T and LQ121K1LG52C LCD Modules.

For more information, please contact your Sharp Sales Representative.

ISSUE DATE	SAMPLES AVAILABLE	RTR	MASS PRODUCTION	NOTIFICATION NO.
23 Oct. 2020	Nov. 2020	Dec. 2020	March 2021	PCN-2020-10-23-02-LG52

## I. Changed Part

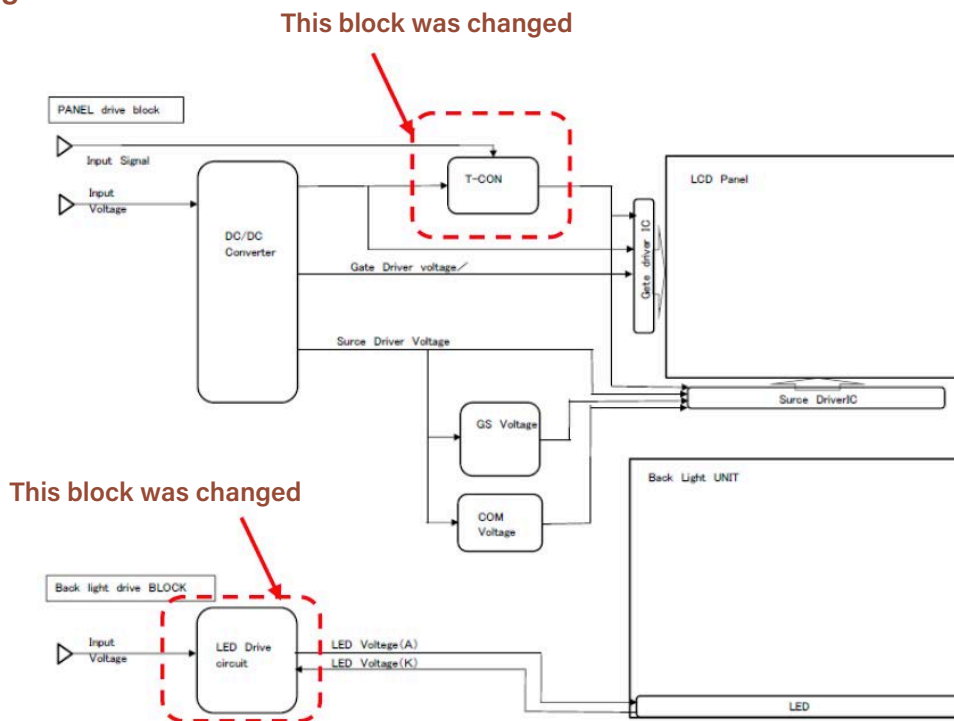

## II. Comparative Chart of Basic Specifications:

### LED Driver IC

	Current	After	LCD design
Vendor	SHARP	ROHM	
Parts No	IR2E58U	BD65D00MUV	
Package	HQFN(24pin)	VQFN(28pin)	
Input Voltage	4.5V~28V	6.0V~27V	Typ.12V
Top	-40~85°C	-40~85°C	-30°C~80°C or less
Tst	-55~125°C	-55~150°C	
CH	8ch	4ch	4ch or less
Output Voltage	Max.45V	Max.41V	30V or less
OutputCurrent	Max.40mA/ch	Max.100mA/ch	In the specification
Enable	○	○	
PWB	○	○	
Error Terminal	○	○	LQ084S3LG03 only

ISSUE DATE	SAMPLES AVAILABLE	RTR	MASS PRODUCTION	NOTIFICATION NO.
23 Oct. 2020	Nov. 2020	Dec. 2020	March 2021	PCN-2020-10-23-02-LG52

### III. Comparative Chart of Basic Specifications:

#### T-CON IC

	Current	After	LCD design
Vendor	ROHM	ROHM	
Type	Type.A	Type.B(Aの後継)	
Package	TQFP(80pin)	TQFP(64pin)	
Absolute Maximum	Max.4.0V	Max.4.0V	3.0V~3.6V
Input voltage	Vcc+0.3V	Vcc+0.3V	Vcc+0.0V
Operating temperature	-40~85°C	-40~85°C	-30~80°C
Storage temperature	-55~125°C	-55~125°C	-30~80°C
frequency	20~100MHz	20~100MHz	Typ.40MHz
InputSignal	LVDS	LVDS	—
Output Signal	Mini-LVDS	Mini-LVDS	—