


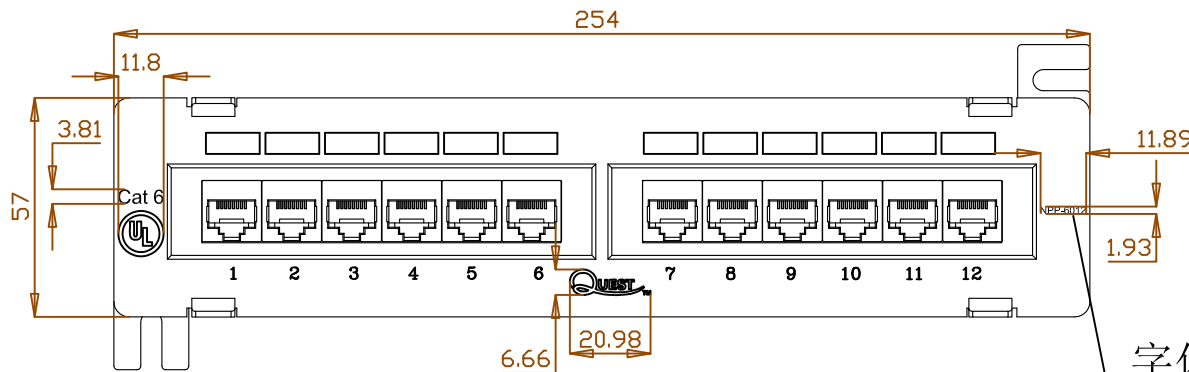
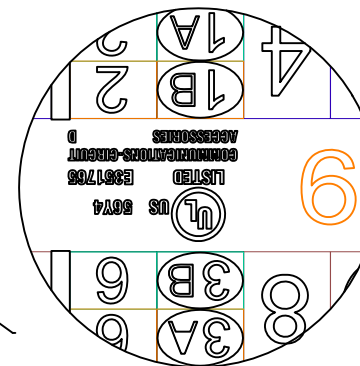
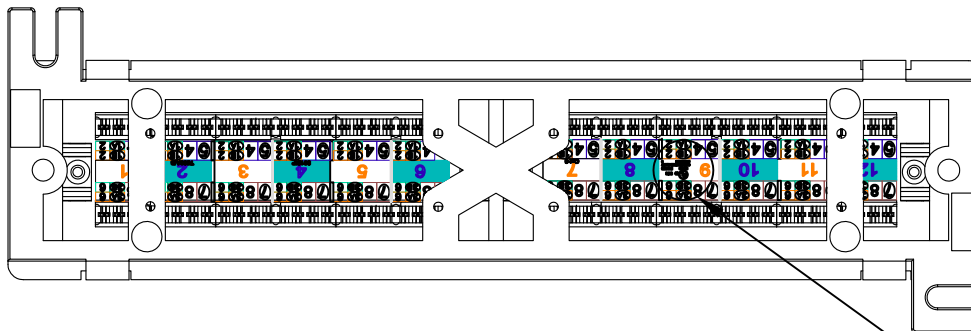


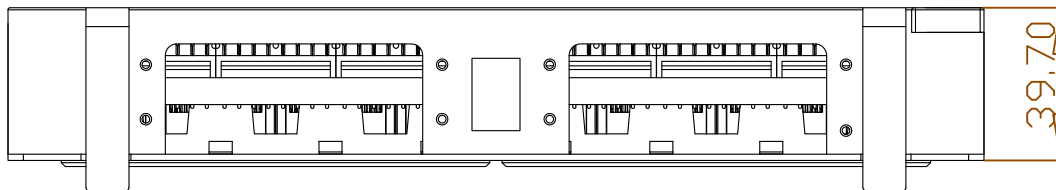

字体: :Arial



放大图纸

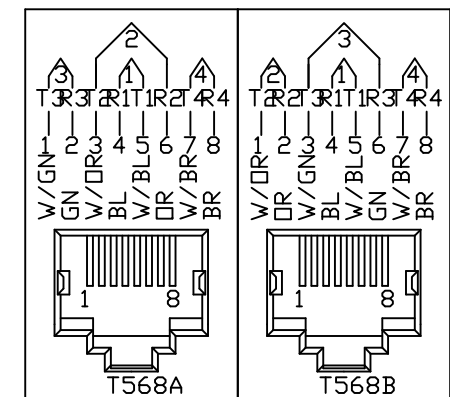

Physical Specification

Jack housing:Polycarbonate resin high-impact UL94V-2

Spring wire:Phosphor Bronze C5210R-H,t=0.3mm

50u" Gold over 70u" Nickel undercoat on contact area

180u" Tin over 70u" Nickel undercoat on solder areat

IDC housing:Polycarbonate resin high-impact UL94V-2

IDC contact:Posphor Bronze C5191R-H, t=0.4mm,200u" Tin over 60u"Nickel undercoat

Insertion Life:750 mating cycles with FCC compliant RJ-45 plug

Contact force:100 grams with FCC compliant RJ-45 plug

Plug retention force:11 lbf min

Durability:200 termination cycles

Contact compatibility:Accommodates 22 to 26 AWG solid/24 AWG stranded

Operating Temperature Range:-10℃ to 60℃

Storage Temperature Range:-40℃ to 68℃

Humidity:10%~90%RH



Scale	1:1	 Quest Technology Int'l, Inc 11200NW 138th st, Medley, FL33178					
3rd Angle Projection							
Unit	mm	Part no. NPP-6012X					
Date	2011.12.21	12 PORT CAT6 110 IDC, 568A/B					
Tolerance		Title: MINI-PATCH PANEL, UL					
~20	~50	~150	150~	ALGLE	Drawn by	Checked by	Drawing No.
+0.2	+0.4	+0.5	+1.5	2°			