
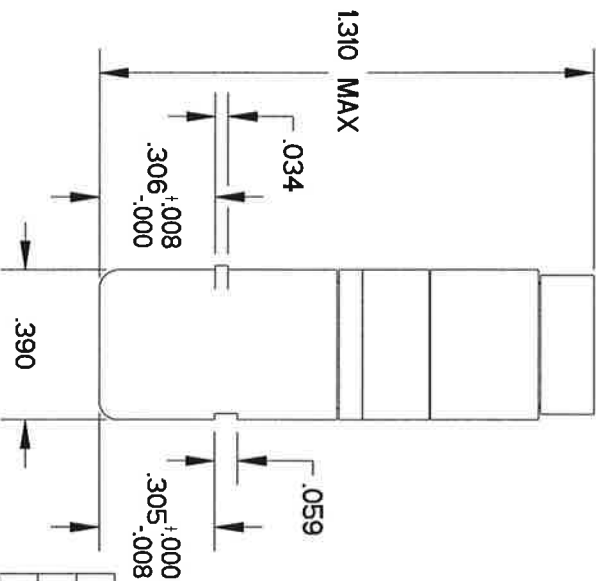
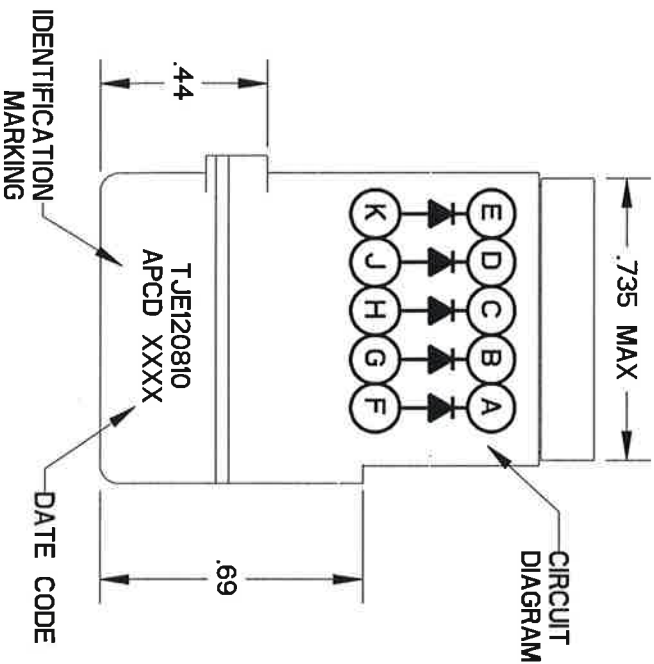


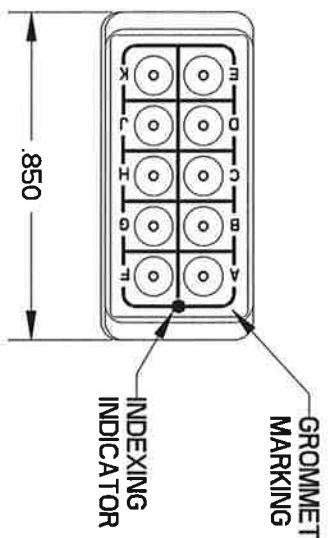

NOTES:

1. MATERIALS:

HOUSING - POLYETHERIMIDE, COLOR: BLACK.

GROMMET - SILICONE ELASTOMER, COLOR: BLUE

DIODE - JAN1XIN5552, QTY 5

2. REQUIRES PIN CONTACTS, M39029/1-101 (PER TABLE)

3. OPERATING RANGE (SUBJECT TO LIMITATIONS OF ELECTRONIC COMPONENTS):

TEMPERATURE: -65°C TO 200°C

INSULATION RESISTANCE: 5000 MEGOHMS @ 25°C

DIELECTRIC WITHSTANDING VOLTAGE:

1500VRMS @ SEAL LEVEL

100VRMS @ 100,000 FEET

CURRENT RATING: 7.5 AMPS

VIBRATION & SHOCK: MIL-T-81714 PARA 3.5.5 & 3.5.8

REV	ECN	APP'D
B	2773	JR 7/3/96
C	7581	JT 8/11/15
D	8422	MD 22Aug18

DIMENSIONS	TOLERANCES	PROJECTION
ANSI Y14.5M	XX ±0.01	
UNITS: INCHES	.XXX ±0.005	
PRO/E FILE	ANGLES ±10°	

Amphenol Pcd
SPECIFICATION DRAWING

ENGR W. HEDBERG 7/27/15

TITLE
ELECTRONIC MODULE ASSEMBLY
DIODE, JAN1XIN5552
SIZE 20

ORDERING OPTIONS		
P/N	SUPPLIED CONTACTS	PART MARKING
TJE120810LC	NONE	TJE120810
TJE120810	(11) M39029/1-101	

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD INC., BEVERLY, MA			
CHKD	SIZE A	DWG NO. TJE120810_C	REV D
APP'D	CODE: 58982	SCALE: 2:1	SHEET 1 OF 1