

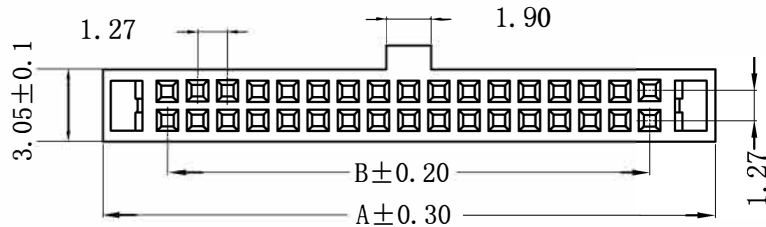


With Bump

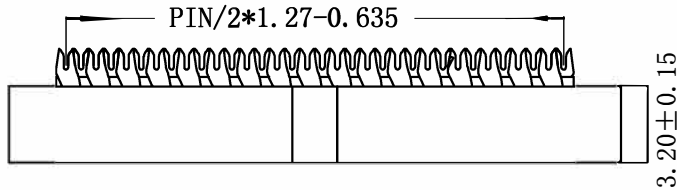

A=1.27*N0 of Positions+4.20
B=1.27*N0 of Positions-1.27



SPECIFICATIONS :

Voltage Rating: 250V AC / DC

Current Rating: 1A AC / DC

Withstanding Voltage: 500V AC/minute

Temperature Range: -40°C~+105°C

Insulation Resistance: 100MΩ Min.

Contact Resistance: 20mΩ Max.

Material:

Housing: PBT,UL94V-0, Natural (Black)

Terminal: Phosphor Bronze/Gold Plated Over Nickel

Cover: PBT,UL94V-0, Natural (Black)

D1275 W V I - 2NP-P0 BK G X

① ②③④ ⑤ ⑥ ⑦ ⑧ ⑨

① Series No.

② Category:W-wafer

③ Welding Board Angle: V- Straight 180°

④ Colloid Feature: I-IDC Type

⑤ Circuit No.: 212-2x06PIN

⑥ Material: P0-PBT,UL94V-0

⑦ Color: BK-Black

⑧ Plating Method: G-Gold-Plated

⑨ Option:A-扁形端子(Flat terminal)

B-圆形端子(Round terminal)

Ordering Information & Dimensions

Part No.	Dimensions (mm)		Part No.	Dimensions (mm)	
	A	B		A	B
6P	8.00	2.54	28P	21.97	16.51
8P	9.27	3.81	30P	23.24	17.78
10P	10.54	5.08	34P	25.78	20.32
12P	11.81	6.35	40P	29.59	24.13
14P	13.08	7.62	44P	32.13	26.67
16P	14.35	8.89	50P	35.94	30.48
18P	15.62	10.16	52P	37.21	31.75
20P	16.89	11.43	60P	42.29	36.83
24P	19.43	13.97	64P	44.83	39.37
26P	20.70	15.24	80P	54.99	49.53

						一般公差 GENERAL TOLERANCE . X ±0.3 . XX ±0.2 . XXX ±0.1	EASE electronics EASE ELECTRONICS CO., LIMITED				料号 PART NO D1275WVI-2NP-P0BKGX			
											品名 TITLE 1.27*1.27mm Pitch I.D.C Connectors			
2022. 11. 15	A	B	依据实物更新图纸				核准 APPD	审核 CHK	绘图 DR	日期 DATE	单位 UNIT mm	比例 SCALE 1/1	图号 NUMBER	版次 REV B
日期 DATE	旧版次 OLD REV	新版次 NEW REV	变更内容 DESCRIPTION	审核 CHK	核准 APPD	角法 PROJECT 								