


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: X100WCOLOR
HOUSING & PLUNGER: MOLDED NYLON. AVAILABLE IN TEN COLORS.
CONTACT BLADE: GOLD PLATED BeCu.
SPRING: STAINLESS STEEL.
2. P/N: W-200/COLOR
22AWG TINNED COPPER
0.070 [1.78] O.D. PVC INSULATION
AVAILABLE IN TEN COLORS.
3. PERFORMANCE
MAXIMUM CURRENT: 2.5 AMPS
MAXIMUM VOLTAGE: HANDHELD: 33VAC/60VDC
HANDS FREE: 1000 W.V.D.C.
MAXIMUM TEMPERATURE: 176°F (80°C)

LTR	REVISIONS		
	DESCRIPTION	DATE	APPROVED

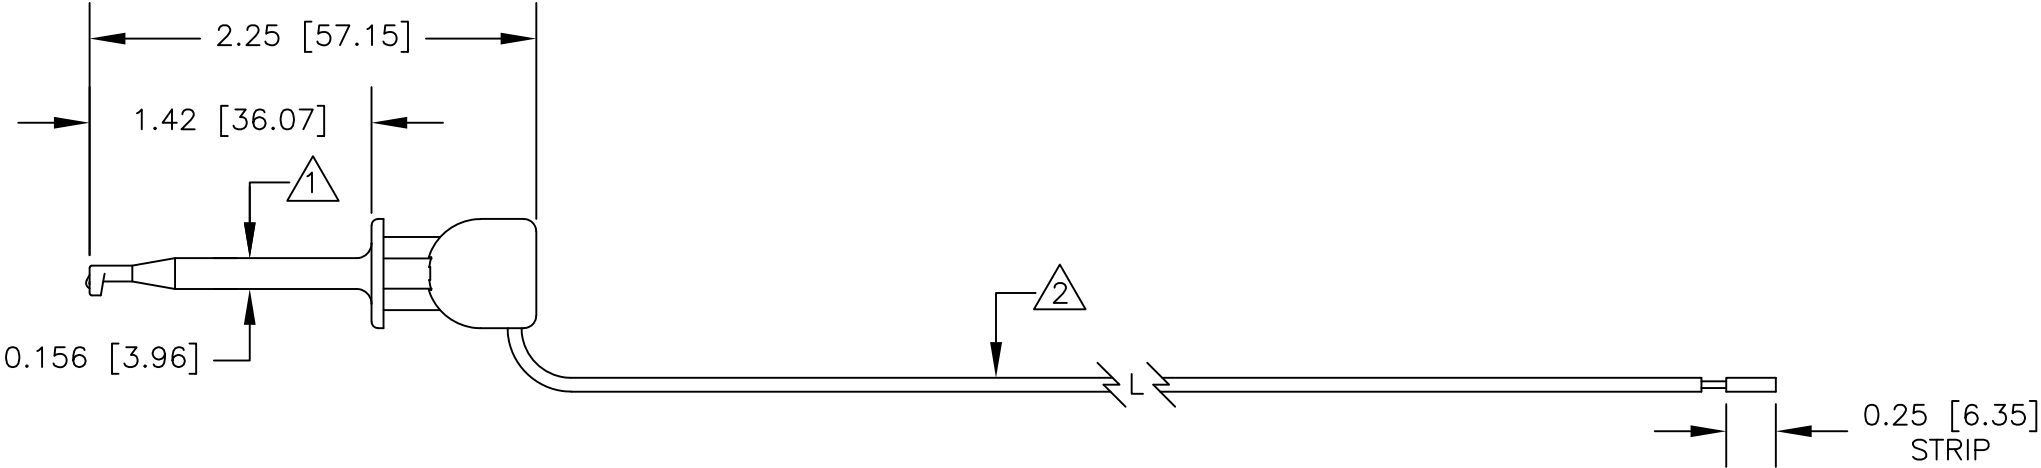

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		<div><div>E-Z-HOOK®</div><div>DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.</div></div>			
			APPROVALS	DATE	DESCRIPTION MINI-HOOK (X100W) TO LEAD ONLY			
			DRAWN R.L.	5/13				
		MATERIAL SEE NOTE.	APPROVED BY		SIZE	CODE IDENT NO.	DRAWING NO.	REV.
		FINISH SEE NOTE.			B	08505	213W	
NEXT ASSY	USED ON				SCALE	1:1		SHEET 1 OF 1
APPLICATION		DO NOT SCALE DRAWING						