

A

B

C

D

A

B

C

D

1

2

3

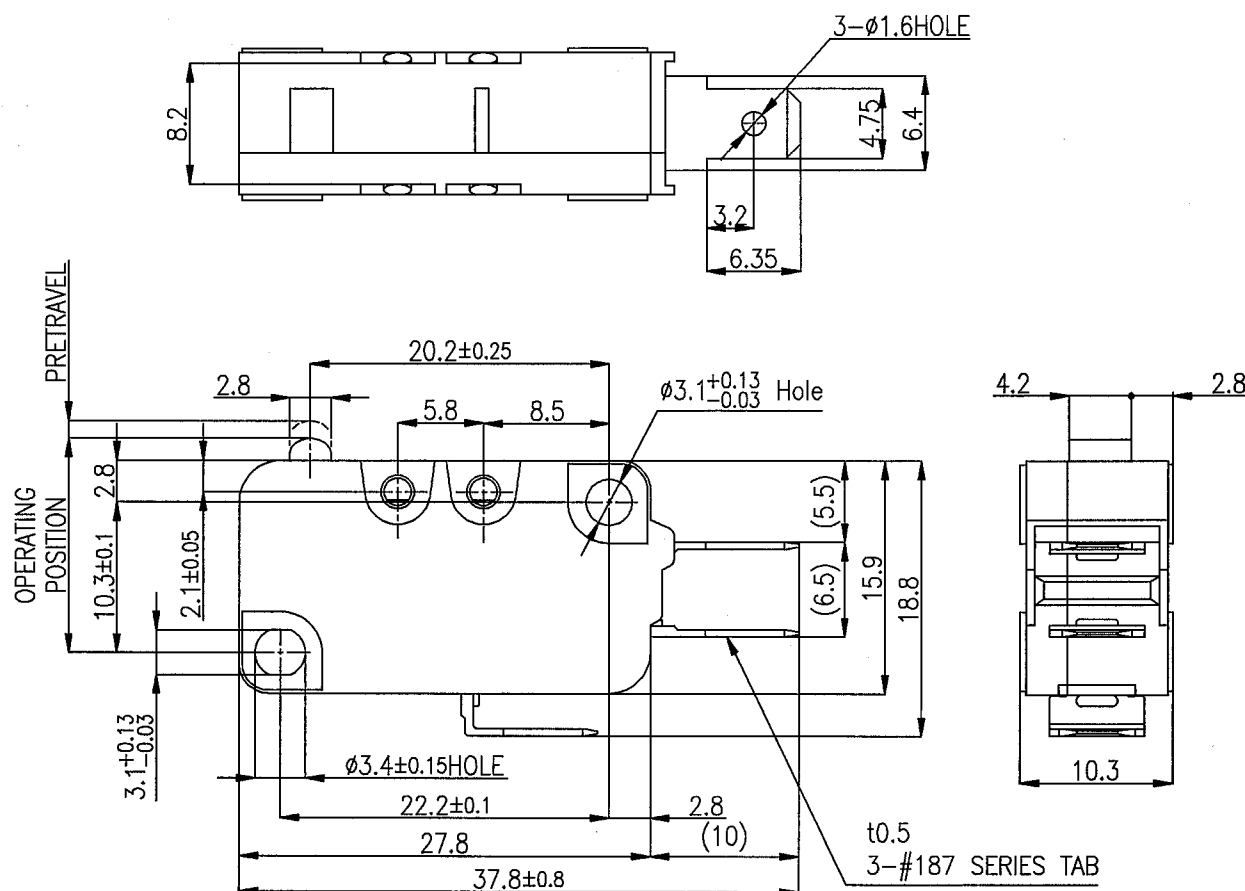
4

5

6

1. CHARACTERISTICS

OPERATING FORCE	3.92N(400gf)MAX
RELEASE FORCE	0.78N(80gf)MIN
PRETRAVEL	1.2 mm MAX
OVER TRAVEL	1.0 mm MIN
MOVEMENT DIFFERENTIAL	0.3 mm MAX
OPERATING POSITION	14.7 ± 0.4 mm

2. CONTACT ARRANGEMENT
SINGLE POLE DOUBLE THROW3. ELECTRICAL RATINGS
16A 1/2HP 125 250V AC ~
0.1A 125V DC ==
16(3)A 250V ~

MATERIAL

FINISH

TOLERANCES
UNLESS
SPECIFIED
±0.4DESIGNED
RIZKI

JUN.20, '12

CHECKED
ADRI

JUN.21, '12

APPROVED
BENNY

JUN.21, '12

SCALE
2 : 13RD
ANGLE

SHEET

TYPE D3V-16G-1C26
MINIATURE BASIC SWITCH
OUTLINE DRAWINGDRWG
NO. 9493385-9 A

DESIGNED FOR D3V