

Peplink Routers:




MAX-BR1-MINI-LTEA-US-PRM
125.7 x 107 x 35 mm

MAX BR1 Mini

- North American Multi-Carrier LTE CAT-7
- Wi-Fi 5 (11ac, dual 2.4 and 5 GHz)
- Active GPS
- LAN: 3x 10/100/1000M Ethernet WAN:
- 1x 10/100/1000M Ethernet Dual SIM
- Slots
- InControl2 Device Management
- -40° to +149°F / -40° to +65°C Feature
- Pack enables Ethernet WAN, Wi-Fi WAN, Hot Failover, WAN Smoothing, GPIO, and Ignition Sensing (MAX-BRI-MINI-LC-FP)

New

Certified on UL and
Class 1, Division 2

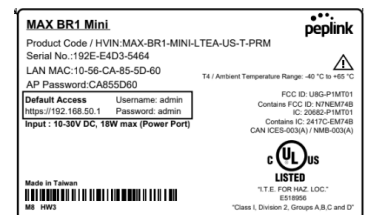

MAX-BR1-MINI-LTE-US-T-PRM
MAX-BR1-MINI-LTE-US-T-M-PRM (no Wi-Fi)

125.7 x 107 x 35 mm

MAX BR1 Mini (Wi-Fi & No-Wi-Fi Versions)

- North American Multi-Carrier LTE CAT-4
- Wi-Fi 5 (11ac, dual 2.4 and 5 GHz)
- Active GPS
- LAN: 3x 10/100/1000M Ethernet WAN:
- 1x 10/100/1000M Ethernet Dual SIM
- Slots
- InControl2 Device Management
- -40° to +149°F / -40° to +65°C Feature
- Pack enables Ethernet WAN, Wi-Fi WAN, Hot Failover, WAN Smoothing, GPIO, and Ignition Sensing (MAX-BRI-MINI-LC-FP)

New

Certified on UL and
Class 1, Division 2

