


Notes:

1. Only RoHS Compliant Processes and Materials used for this assembly.
2. Marking to Contain "ConductRF", Part No. & WK/YR Date Code, Black Text.
3. Single Centered Marker up to 15'(4.5M), Two Markers 12"(30cm) from ends for lengths over 15'(4.5M)

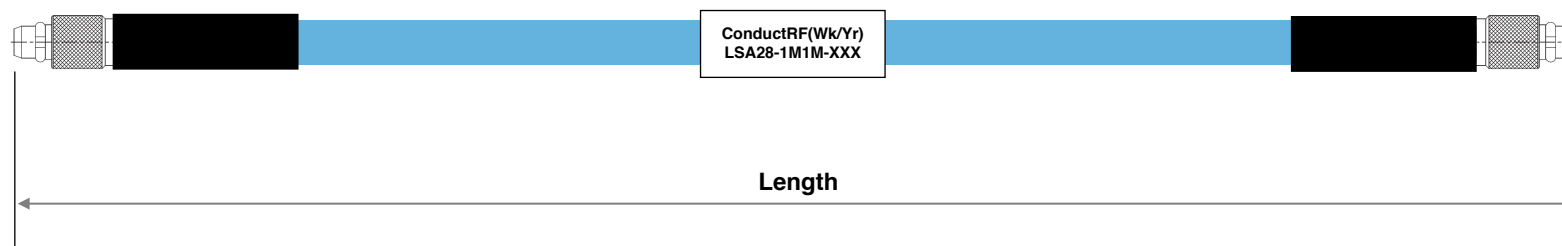

Part No. Configurator - XXX

FXX = Length in Feet (eg F03=3ft)
 SXX = Length in Inches (eg S18=18")
 XMX = Length in Meters (eg 2M5=2.5m)
 CXX = Length in CM (eg C50=50cm)

		Max. Insertion Loss(dB)	
ConductRF # (XXX)	Length	3GHz	6GHz
S06	6"	0.36	0.51
S12	12"	0.59	0.84
S18	18"	0.81	1.17
VSWR Max.		1.35:1	

5	Label	CPA300 or Equiv.	White
4	Strain Relief	CPA300 or Equiv.	Black
3	Flexible Spiral Coax	A28SS	Blue FEP
2	MMCX Male	MMM11B-A28G01	Gold
1	MMCX Male	MMM11B-A28G01	Gold
ITEM	DESCRIPTION	MATERIALS	FINISH

					Customer DWG	Title: Low Loss Flex 0.086" MMCX M to M Assembly				
						Remarks:	Originated: 08/25/17	Conduct RF sales@ConductRF.com Tel: +1 978 374 6840	Range: LSA	
2	Updated MMCx to 11B		DG	04/30/20	Dwg Ref: LSA28-1M1M					
1	Pre-Release		DG	08/25/17						
REV.	DESCRIPTION	ECN	DRAWN	DATE	Length Tolerances: ≤24" = ±0.25" >24" = ± 1%	Checked: JW	Approved: PL	Rev: 2	Part No: LSA28-1M1M-XXX	
REVISION HISTORY										