


Notes:

1. Only RoHS Compliant Processes and Materials used for this assembly.
2. Marking to Contain "ConductRF", Part No. & WK/YR Date Code, Black Text.
3. 100% Sweep Tested to Max Frequency w. Factory Stored Hi-Point Data

ConductRF(Wk/Yr)
LSA29-N1N1-XXX

Marker Example

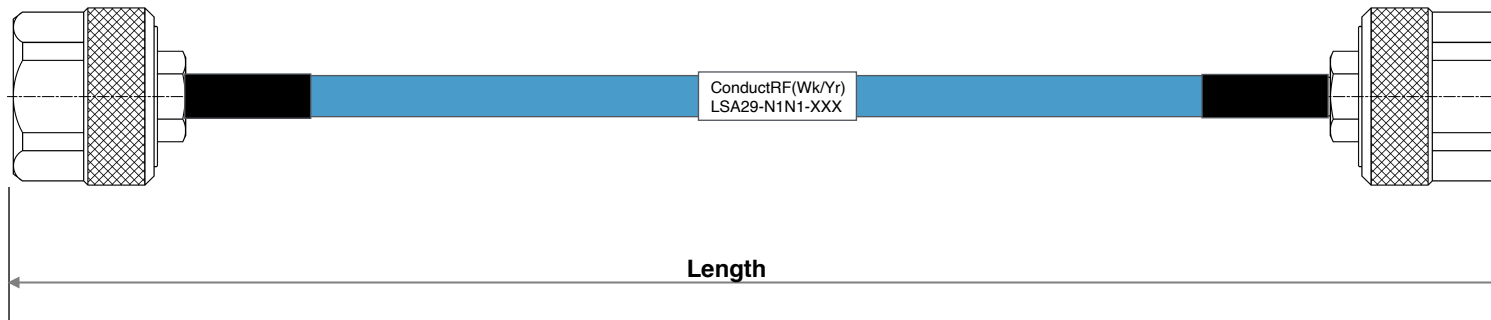

		Insertion Loss(dB) - Typ
ConductRF # (XXX)	Length	18GHz
S12	12"	1.03
S16	16"	1.26
S18	18"	1.38
S24	24"	1.73
S36	36"	2.43
S48	48"	3.13
S55	55"	3.54
S60	60"	3.84
VSWR Typ.		1.35:1

Part No. Configurator - XXX

FXX = Length in Feet (eg F03=3ft)

SXX = Length in Inches (eg S18=18")

XX = Length in Meters (eg 2M5=2.5m)

CXX = Length in CM (eg C50=50cm)

5	Label	Shrink Tube	White
4	Strain Relief	Shrink Tube	Black
3	Flexible Spiral Coax	A29SS	Blue FEP
2	Type-N Str. Male	N5M17D-A29N01	Nickel
1	Type-N Str. Male	N5M17D-A29N01	Nickel
ITEM	DESCRIPTION	MATERIALS	FINISH

					Customer DWG	Title: Low Loss 0.141” Flexible N M to N M - 18GHz					
						Remarks:	Originated: 08/18/14	Conduct RF sales@ConductRF.com Tel: +1 978 374 6840		Range: LSA	Sheet 1 of 1
1	Pre-Release		DG	12/17/14						Dwg Ref: LSA29-N1N1	
REV.	DESCRIPTION	ECN	DRAWN	DATE	Length Tolerances: ≤24" = ±0.25" >24" = ± 1%	Checked: JW	Approved: PL	Rev: 1	Part No: LSA29-N1N1-XXX		
REVISION HISTORY											