


Part Number: F06085



Dim. A	6mm (0.236")
Dim. B	1.22mm (0.048")
Dim. C	0.30mm (0.012")
Dim. D	5.00mm (0.197")
Dim. E	2.44mm (0.096")
Dim. X (dome cavity)	5.59mm (0.22")
Fmax/Force	85g +/- 30g, typical
Life Cycles	up to 5,000,000
Dimple	No
Contact Configuration	SPST N.O.
Switching Voltage	0.1 to 50 VDC
Switching Capacity	1 Watt
Switching Current	0.05 to 100 mA DC
Contact Bounce	<0.3ms make <0.6ms break
Base Material	SSTL
Plating	Nickel/Silver/Gold optional
Operating Temp Rating	-45 degrees C to +100 degrees C
Storage Temp Rating	-55 degrees C to +100 degrees C

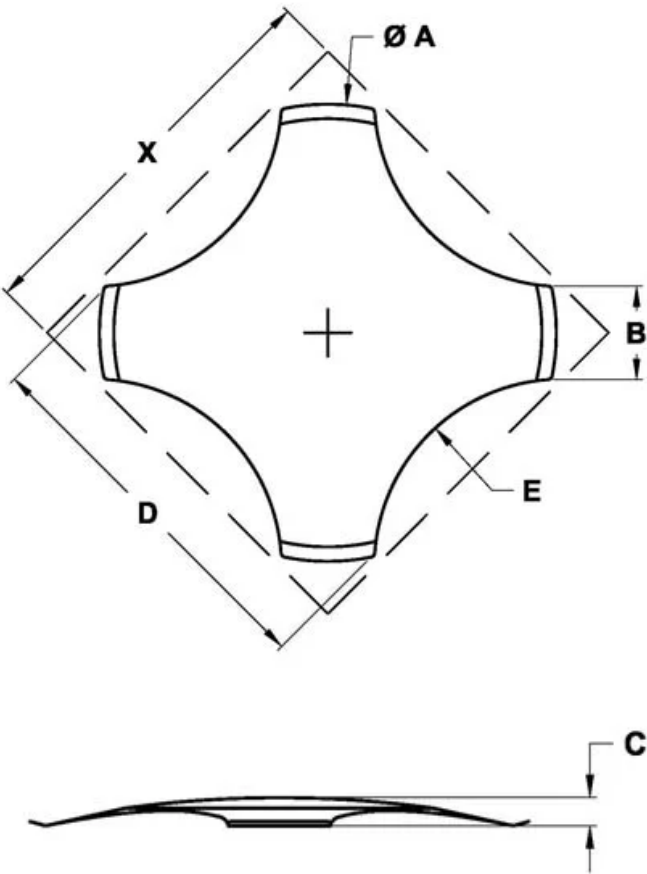