


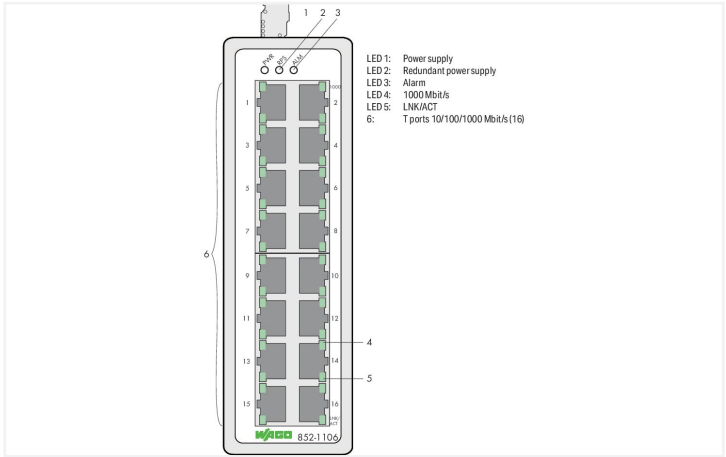

Color: ■ black metallic

This unmanaged industrial ETHERNET switch (852-1106) has 16 Gigabit ETHERNET ports for easily setting up small- to medium-sized networks. Its slim design paired with a DIN-rail adapter simplifies installation in the control cabinet and provides high vibration and shock resistance. Additionally, auto-matic transmission rate detection (auto-negotiation) and automatic identification of the transmit and receive lines (Auto MDI-X) allow simple plug-and-play operation, saving time and money during commissioning.

Status LEDs, a redundant power supply and an alarm contact (configurable via DIP switch) increase the switch's redundancy and diagnostic capabilities, providing higher operational uptime.

Features:

- Redundant DC power supply
- Wide supply voltage range: 12 ... 60 VDC
- DIP switch to set alarm functions
- Full compliance with IEEE 802.3, 802.3u and 802.3ab standards
- Non-blocking, store-and-forward switching
- Auto-negotiation at all 10/100/1000BASE-T ports
- Auto-MDI/MDIX (crossover) at all 10/100/1000BASE-T ports
- Integrated address look-up table, supports up to 8000 absolute MAC addresses
- Overvoltage protection
- Prioritization of ETHERNET data packets (PROFINET protocol, EtherType=0x8892) per IEEE802.1p

Technical data	
Switching mode	Store-and-forward; non-blocking
Number of 1 Gbit/s ports	16
Communication standards	IEEE 802.3 10BASE-T IEEE 802.3u 100BASE-TX/FX IEEE 802.3ab 1000BASE-T IEEE 802.3x Flow Control IEEE 802.3az Energy Efficient Ethernet IEEE 802.1p Prioritization
Redundancy function	Redundant DC power supply
Configuration options	DIP switch for signal contact
Diagnostics	Signal contact
MAC table (size)	8000 addresses
Jumbo frame size	10000 bytes
Supply voltage	12 ... 60 VDC
Power consumption (max.)	12 W
Baud rate	Copper cable: 10/1000 Mbit/s
Transmission medium (communication/fieldbus)	Copper cable: Cat. 5e or higher, 100 m maximum cable length
Controls	2 x DIP switch: Alarm function power supplies
Indicators	Device: LED (PWR, RPS) green: Power supply (primary), redundant power supply (secondary); LED (ALM) red: Alarm; per port: LED (1000, LNK/ACT) green: Status 1000 Mbps, LNK/ACT ports 1 ... 16

Connection data

Connection technology: communication/fieldbus	Copper cable: 16 x RJ-45
Connection technology: supply	1 x Built-in male connector: 231-436/001-000; included female connector (MCS Connectors): 2231-106/026-000

Physical data

Width	50 mm / 1.969 inches
Height	162 mm / 6.378 inches
Depth	120 mm / 4.724 inches

Mechanical data

Weight	840 g
Color	black metallic
Housing material	Aluminum
Conformity marking	CE

Environmental requirements

Ambient temperature (operation)	-40 ... +70 °C
Ambient temperature (storage)	-40 ... +80 °C
Protection type	IP30
Relative humidity (without condensation)	95 %
Mounting type	DIN-35 rail
Vibration resistance	per IEC 60068-2-6
Shock resistance	per IEC 60068-2-27
EMC immunity to interference	per EN 61000-6-2
EMC emission of interference	per EN 61000-6-4
Fire load	0.302 MJ

Commercial data

eCl@ss 10.0	19-17-01-30
eCl@ss 9.0	19-17-01-06
ETIM 8.0	EC000734
ETIM 7.0	EC000734
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	TW
GTIN	4055143604659
Customs tariff number	8517620000

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------



Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
EAC Brjansker Zertifizierungs- stelle	TP TC 020/2011	EAC RU C-DE.AM02. B.00087/19
KC National Radio Research Agency	Article 58-2, Clause 3	MSIP-REM-W43-ISW852
UL Underwriters Laboratories Inc. (ORDINARY LOCATI- ONS)	UL 61010-2-201	E175199

Declarations of conformity and manufacturer's declarations

Approval	Standard	Certificate Name
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-

Approvals for marine applications



Approval	Standard	Certificate Name
DNV DNV GL SE	-	TAA00002YN
LR Lloyds Register	-	LR2128525TA

Downloads

Environmental Product Compliance

Compliance Search
Environmental Product Compliance 852-1106



Documentation

Manual			
Product Manual 16-Port 1000BASE-T Industrial Switch	V 1.2.0 15.04.2021	pdf 1879.94 KB	



System Description		
Industrial Switches – General Product Infor- mation	pdf 1873.93 KB	



Bid Text			
852-1106	09.05.2018	docx 17.92 KB	
852-1106	19.02.2019	xml 5.31 KB	





CAD/CAE-Data	
CAD data	CAE data
2D/3D Models 852-1106	EPLAN Data Portal 852-1106
	
	ZUKEN Portal 852-1106
	