


Quartz Crystal


SMD-version

part no.	12.85624
model	KX – 5E
frequency	96.0 MHz
mode	fundamental
operating temperature	-40° ~ +105°C
frequency tolerance at +25°C	±12 ppm
temperature tolerance	±16 ppm
load capacitance C_L	8 pF
series resistance R1 (ESR) max.	20 Ohm
aging at +25°C (first year) max.	±2 ppm
shunt capacitance C_0 max.	3.5 pF
drive level max.	100 µW
contents of reel	3000 pcs.


Dimensions:

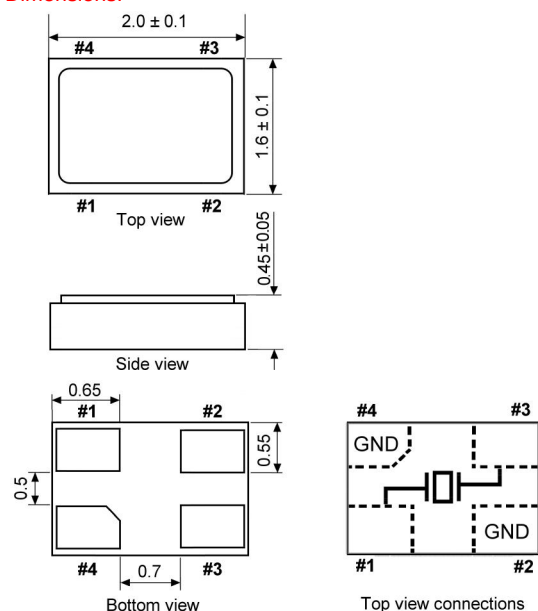

Suggested soldering pad:

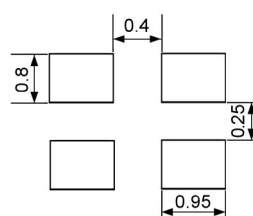

Reflow soldering condition:

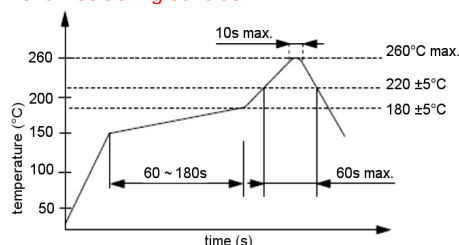

Tape specification:

