

50 Watts WR-28 Waveguide Load 26.5 GHz to 40 GHz, Brass with UG Square Cover Flange

Waveguide Terminations Technical Data Sheet

PE-W28TR1004

Features

- WR-28 Waveguide
- Operating Frequency Range from 26.5 GHz to 40 GHz
- UG Square Cover Flange
- 1.25:1 Max VSWR
- 50 Watts Average Power Handling

Applications

- Radar Systems
- Military and Space
- Wireless Radio Systems
- Telecom Infrastructure
- Communication Systems
- R&D Labs
- Microwave Radio Systems

Description

The PE-W28TR1004 is a WR-28 waveguide termination/load that operates in the frequency range of 26.5 GHz to 40 GHz. This WR-28 waveguide termination has a Max VSWR of 1.25:1. This waveguide termination design is made of painted brass and incorporates a standard UG Square Cover flange. Waveguide terminations are part of Pasternack's comprehensive waveguide product offerings which are available in stock and ready for same-day shipment.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	26.5		40	GHz
VSWR			1.25:1	
Input Power (CW)			50	Watts

Mechanical Specifications

Size	
Length	4.13 in [104.9 mm]
Width/Dia.	0.75 in [19.05 mm]
Height	0.75 in [19.05 mm]

Description	Flange	Waveguide
Designation	UG-599/U	WR-28
Type	Square Cover	
Material	Brass	Brass
Plating		Passivated
Finish		Grey paint

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 Watts WR-28 Waveguide Load 26.5 GHz to 40 GHz, Brass with UG Square Cover Flange PE-W28TR1004](#)

50 Watts WR-28 Waveguide Load 26.5 GHz to 40 GHz, Brass with UG Square Cover Flange

Waveguide Terminations Technical Data Sheet

PE-W28TR1004

Environmental Specifications

Temperature

Operating Range

-40 to +70 deg C

Compliance Certifications (see [product page](#) for current document)

Notes:

50 Watts WR-28 Waveguide Load 26.5 GHz to 40 GHz, Brass with UG Square Cover Flange from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 Watts WR-28 Waveguide Load 26.5 GHz to 40 GHz, Brass with UG Square Cover Flange PE-W28TR1004](#)




URL: <https://www.pasternack.com/50-watts-wr-28-rf-load-26.5-40-ghz-instrumentation-grade-pe-w28tr1004-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE-W28TR1004 CAD Drawing

50 Watts WR-28 Waveguide Load 26.5 GHz to 40 GHz,
Brass with UG Square Cover Flange

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	3/31/2021	S.PONG

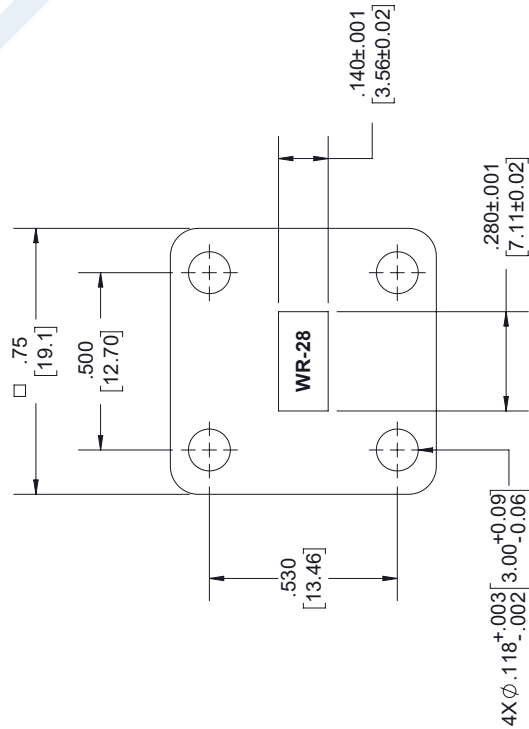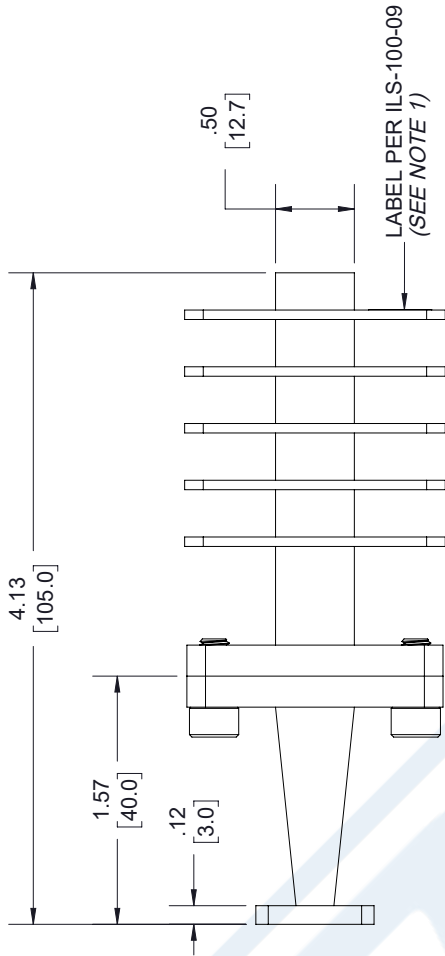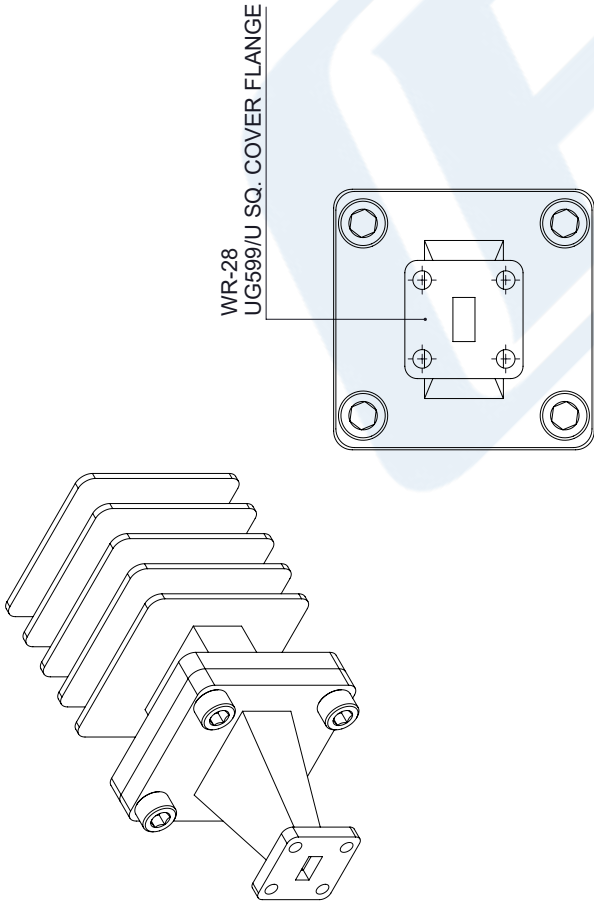

FLANGE DETAIL

NOTES:

1. LABEL PER ILS-100-09. FOR INTERNAL USE ONLY.
LABEL LOCATION FOR REFERENCE ONLY.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

THIRD-ANGLE PROJECTION

THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION. ALL RIGHTS RESERVED.

SHEET 1 OF 1

SCALE N/A

PE PASTERNAK
an INFINITI® brand

Pasternack Enterprises, Inc.
P.O. Box 16759, Irvine, CA 92623.
Phone: 1.949.261.1920 | 1.866.727.8376
Fax: 1.949.261.7451
Website: www.pasternack.com
E-mail: sales@pasternack.com

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:

.X = ± .2	[5.08]	FRACTIONS
.XX = ± .02	[.51]	± 1/32
.XXX = ± .005	[.13]	ANGLES ± 1°

CABLE LENGTH (L) TOLERANCES:

L ≤ 12 [305]	± .1 [25]	/ -0
12 [305] < L ≤ 60 [1524]	± .2 [51]	/ -0
60 [1524] < L ≤ 120 [3048]	± .4 [102]	/ -0
120 [3048] < L ≤ 300 [7620]	± .6 [152]	/ -0
300 [7620] < L	± .5% L	/ -0

ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.

SIZE A

CAGE CODE 53919

DRAWN BY K.DANG

ITEM NO. PE-W28TR1004

REV A