
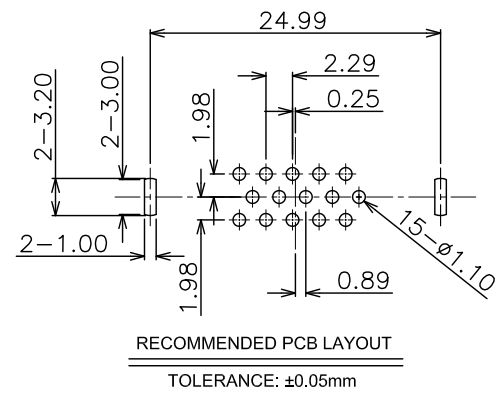




符合"DLK环境管理物质技术标准"

符合"IEC协会标准"

工程变更通知单 ECN(DCN) NO.	版本 REV	日期 DATE	说明 DESCRIPTION	改变 CHANGE	承认 APPRO.
KSECN16047	A	20160913	NEW RELEASE	—	—

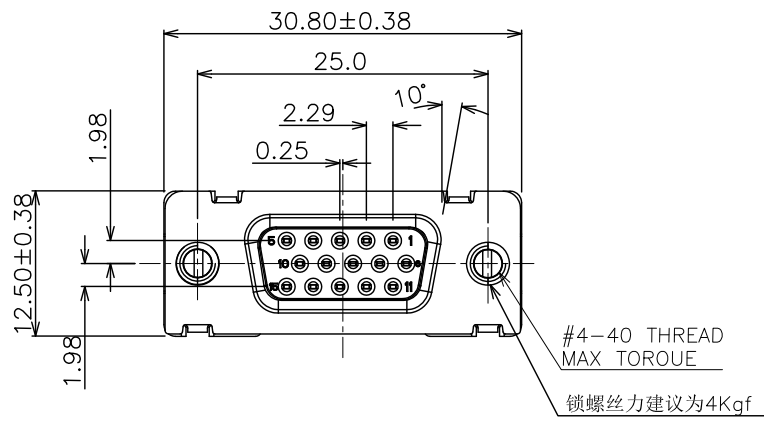

NOTE:
1. MATERIAL:
1.1 Housing/Cover: PBT UL94v-0, color: Blue
1.2 Contact: Copper alloy
1.3 Shell: Ferro alloy
1.4 Rivet Insert:Ferro alloy
1.5 Screw: Ferro alloy
2. PLATING:
2.1 Contact: 1u"Au plated on contact Area, 100u" Min. Matte Tin plated on solder tail, 50u" Min.Nickel underplated
2.2 Shell: Nickel plated overall
3. MECHANICAL:
3.1 Insertion force:2.0~5.0kgf.
3.2 Withdrawal force:1.0Kgf Min.
3.3 Durability:500 cycles Min.
4 ELECTRICAL:
4.1 Current Rating:1.0A
4.2 Voltage Rating:36V
4.3 Dielectric strength:500V AC FOR 1 minute
4.4 Insulation Resistance:1000MΩ Min.
4.5 Contact Resistance:30mΩ Max
5. Operating Temperature:-55°c to +105°c
6. PACKING: Tray

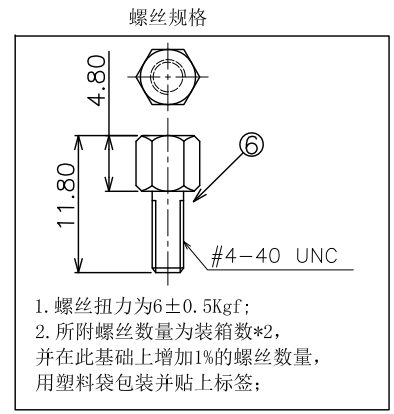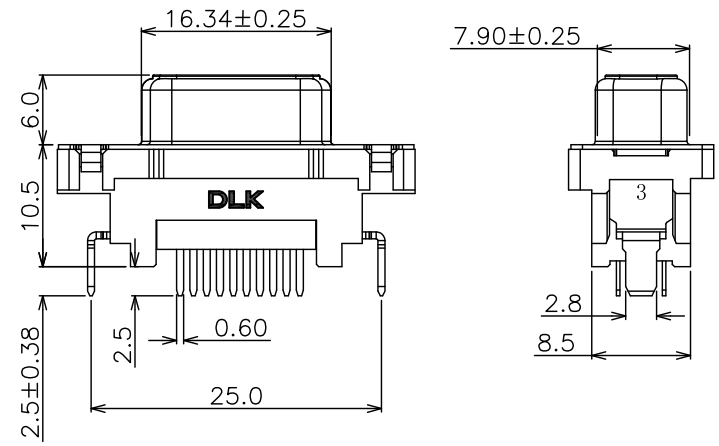

6	SCREW	2	FERROALLOY	Ni PLATED
5	RIVET INSERT	2	FERROALLOY	Tin PLATED
4	CONTACT	15	COPPER ALLOY	Au AND Tin PLATED
3	SHELL	1	FERROALLOY	Ni PLATED
2	COVER	1	PBT	UL94V-0 BLUE
1	HOUSING	1	PBT	UL94V-0 BLUE
NO.	ITEM	Q'TY	DESCRIPTION	FINISH

GENERAL TOLERANCE UNLESS OTHERWISE NOTED		德力康电子科技有限公司 DELIKANG ELECTRONICS TECHNOLOGY CO.,LTD			
Angle	±5°	C 名称 TITLE: D-SUB 立式 10.5H 直角叉片 锁螺丝			
X.	±0.35	档案名称 FILE NAME.	C-DSB6A-00-02	料号 PART NO:	86A15L01310
.X	±0.25	DRAWING	万小龙	CHECKED	王永辉
.XX	±0.15			APPROVED	严成旺
.XXX	±0.10	UNIT:	mm	SCALE	1:1
A4				SHEET:	1 of 1