REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C190411	2019/03/14	Vicky	Change Note
C	C220466	2022/04/13	Ruru	△C X5
D	C230086	2023/01/31	Ruru	△D X1

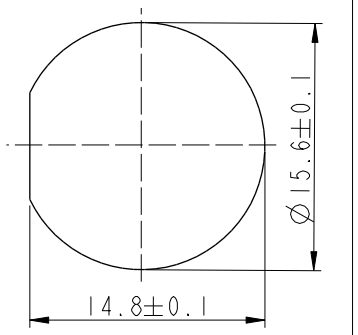

Recommended Panel Cut-out

△C BB-XXPMMS-QC800P

XX: No. Of Pin

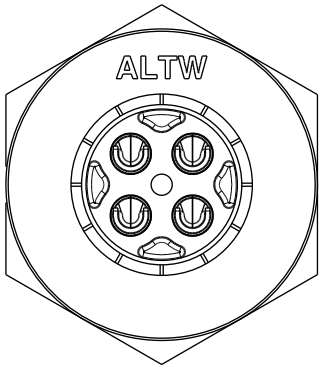

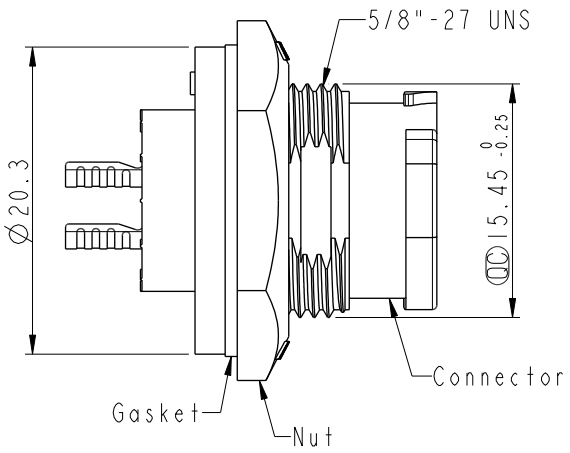

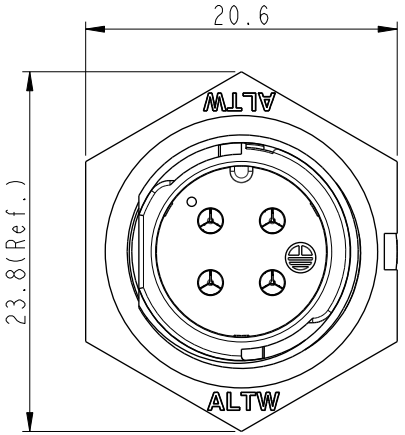

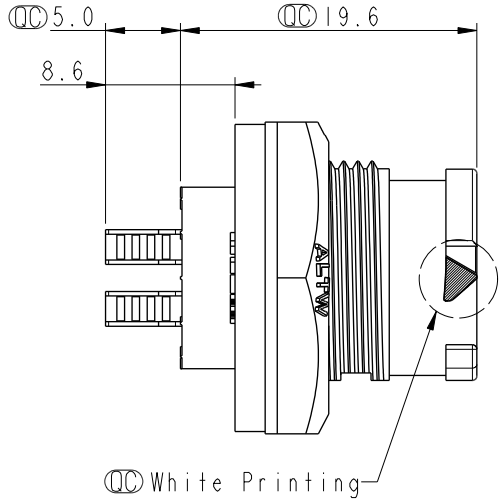

△C



2P



3P



4P

Pin Assignment Front View

Note: △B △C
* RoHS Compliant
* QC Important dimension
△D * Waterproof rate: IP68, unmated 1m/24h
* Connector
  Housing: Thermoplastic, Black
  Pin: Copper alloy, Gold plated
* Nut: Thermoplastic, Black
* Gasket: Rubber, Gray
* Use with waterproof cap or dust cap
  Panel thickness max: 3.0mm
* Use without waterproof cap or dust cap
  Panel thickness max: 4.0mm
* Gasket and nut are packed separately in pe bag

UNIT:mm

TOLERANCE

.X ± 0.25 mm

TITLE: XLOK, B-10A, FRONT FASTENED M, M, SOLDER, PUSH LOCK △C

SCALE 2:1 | SIZE A4 | SHEET 1 OF 1

REV. D | WC-REV. A.1 | QC: Inspection item

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Vicky	2019-03-14
DWG NO: BB-XXPMMS-QC800P △C	CHECKED BY: Rita	DATE: 2019-03-14
CUSTOMER: ALTW	APPROVED BY: Max	DATE: 2019-03-14

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.