


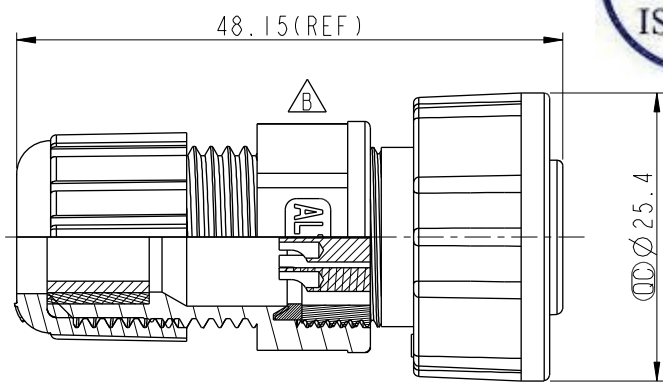


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1741187	2017/04/11	Ruru	Change Logo

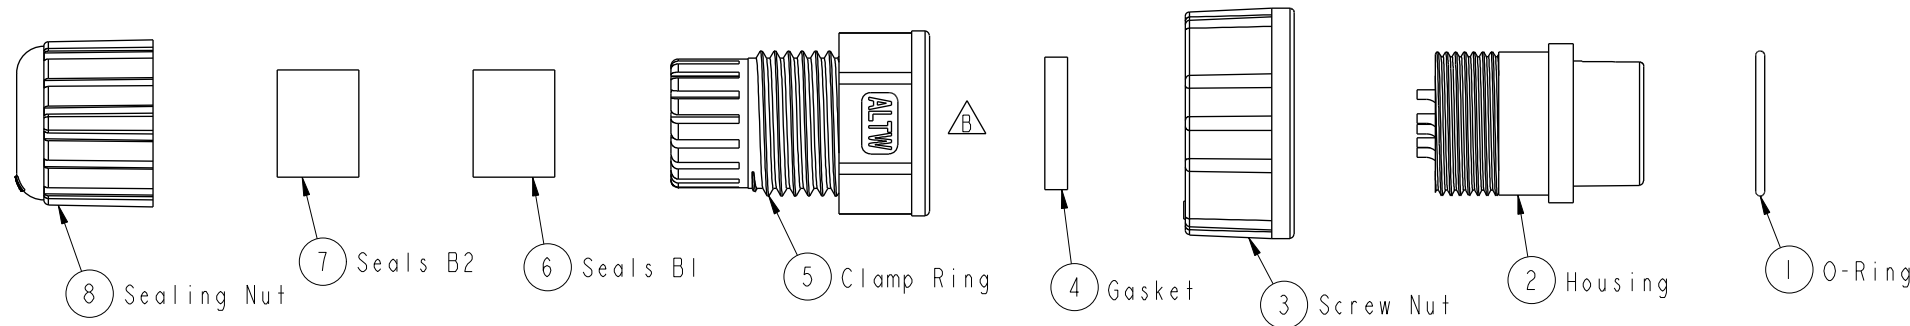

Pin Assignments
Front View前視圖

- Note:
- * (C) Important Dimensions To Check.
 - * Waterproof Rate: IP67
 - * Housing: Nylon+GF, Black
 - * Male Pin: Copper Alloy, Gold Plated
 - * O-Ring: EPDM, Black
 - * Screw Nut: Nylon+GF, Black
 - * Gasket: EPDM, Black
 - * Clamp Ring: Nylon, Black
 - * Sealing Nut: Nylon, Black
 - * Seals B1 for Cable OD: $\varnothing 7.6\text{mm} \sim \varnothing 9.6\text{mm}$
 - * Seals B2 for Cable OD: $\varnothing 4.0\text{mm} \sim \varnothing 7.6\text{mm}$
 - * One Set Unassembled in One PE Bag.

UNIT:mm		TITLE Middle, Assy Screw 8Pin F Conn M Pin		Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO CD-08BFMA-SL7001	DRAWN BY Ruru	DATE 2017-04-11
TOLERANCE .X ± 0.25 .XX ± 0.1 .XXX ± 0.05 ANGLES $\pm 1^\circ$		SCALE 1:1	SIZE A4	SHEET 1	OF 1	DWG NO CD-08BFMA-SL7001	CHECKED BY Rita	DATE 2017-04-11
REV. B		WC-REV. A.2	(C): Inspection item			CUSTOMER ALTW	APPROVED BY Max	DATE 2017-04-11