


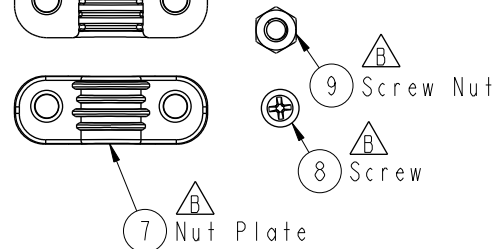

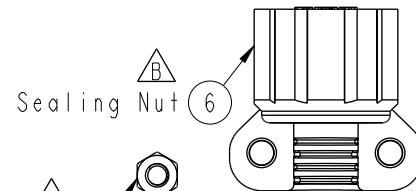



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2017/04/14	Frank Deng	Rev.01 To Rev.A
B	LE317B0195	2017/11/18	Frank Deng	Update Drawing
C	C231296	2023/10/13	Vicky	 X2

360° Adjustable Key Code Direction

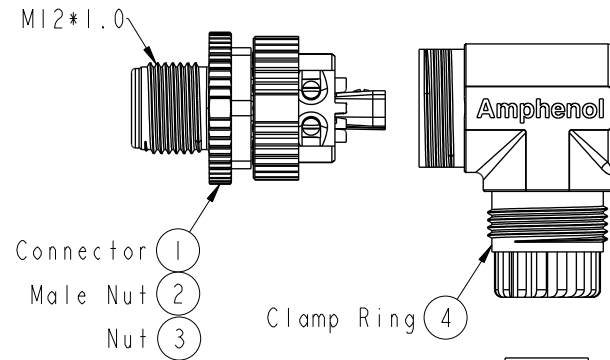

Pin Assignments Front View

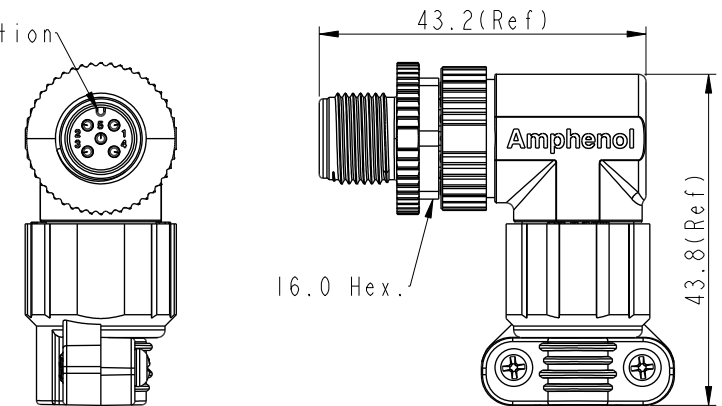

Note:

- *  Important Dimension To Check.
- * Waterproof Rate: IP67(Mated)
- * Housing: Nylon,Black
- * Male Pin: Copper Alloy, Gold Plated
- * Male Nut: PBT+PC,Black
- * Nut: PBT+PC,Black
- * O-Ring:Silicon, Grey
- * Clamp Ring: Nylon,Black
- * Seal: Silicon, Grey
- *  Sealing Nut: Nylon+GF,Black
- * Nut Plate: Nylon+GF,Black
- * Seal For Cable OD: $\varnothing 4.0\text{mm} \sim \varnothing 7.0\text{mm}$
- * Screws for Wire connection recommended
tightening torque: 0.61~0.84 kgf.cm / 0.059~0.082 N.m
- * Applicable Wire gauge (Stranded wire cross section)
0.14mm² (26AWG) ~ 0.82mm² (18AWG)
- * Mating Recommended tightening torque:
4~6 kgf.cm / 0.39~0.59 N.m
- * Sealing-Nut Recommended tightening torque:
4~6 kgf.cm / 0.39~0.59 N.m
- * Detailed applicable wire specifications may vary
depending on the actual wire construction.
- *  One set unassembled in one pe bag

UNIT:mm		 	TITLE NMEA, MC PLASTIC HEX. NUT 4A (APP) CABLE W/O SR, M, M, FI SCREW IN 			Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO HPC-05BMMB-SR7001		DRAWN BY Frank Deng		DATE 2017-11-18		
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±			SCALE 1:1		SIZE A4			DWG NO HPC-05BMMB-SR7001		CHECKED BY Fisher Wang		DATE 2017-11-18		
			REV. C		MC-REV. A.3			CUSTOMER ALTW		APPROVED BY Kevin Hu		DATE 2017-11-18		
			QC: Inspection item											

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.