



Product / Process Change Notification (PCN)

- ☒ Major change
☐ Minor change

PCN #: PCN_IndTIS_20240515 Affected Series: WE-TIS; 744731xxx, 744736332 For more details, see order codes listed below PCN Date: February 15, 2024 Effective Date: May 15, 2024	Change Category: ☐ Equipment / Location ☐ General Data ☐ Material ☐ Process ☐ Product Design ☒ Shipping / Packaging ☐ Supplier ☐ Software
--	--

Contact: Product Management Phone: +49 (0) 7942 - 945 5001 Fax: +49 (0) 7942 - 945 5179 E-Mail: pcn.eisos@we-online.com	Data Sheet Change: ☒ Yes ☐ No Attachment: ☐ Yes ☒ No
---	--

Description and purpose of change:

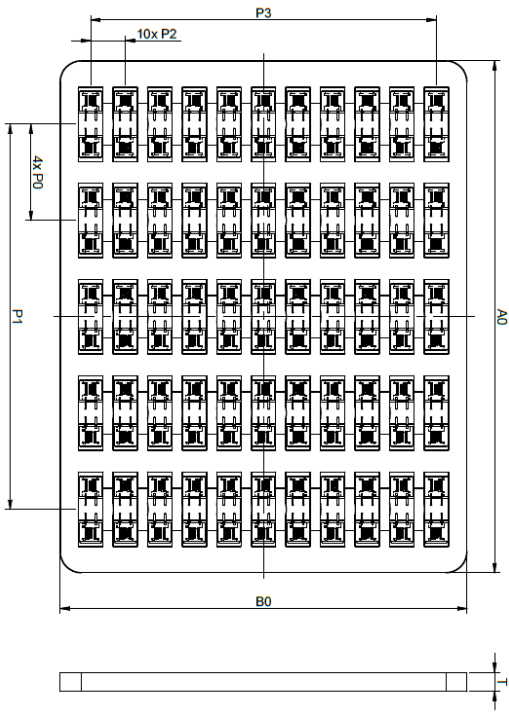
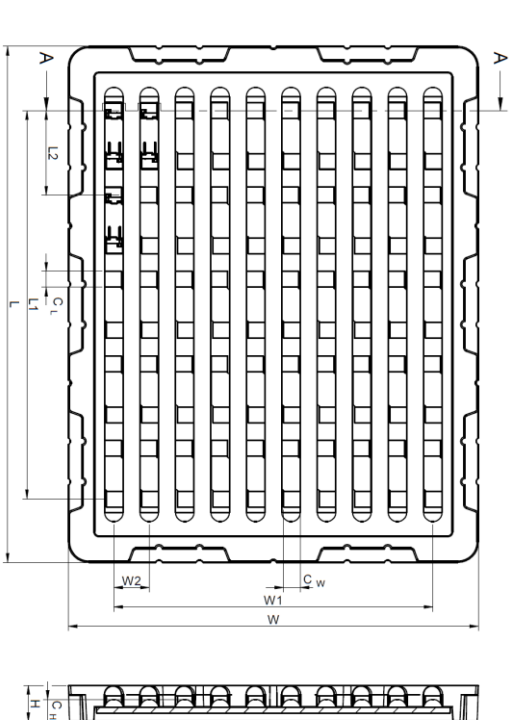
For improved transportation safety, Würth Elektronik will change the tray packaging type.
 There will be no change in form, fit, function, quality or reliability of the product.

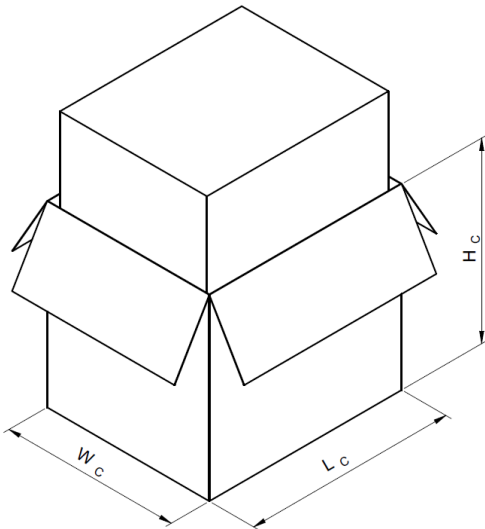
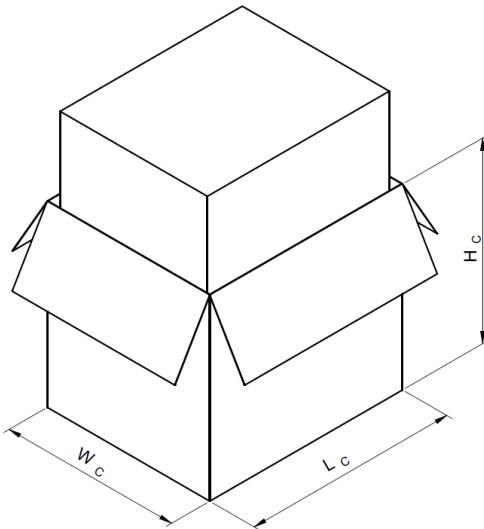
Detail of Change:

Details about the packaging change can be seen below.

Following order codes are affected.

744731102	744731152	744731222	744731331	744731332
744731471	744731472	744731562	744731680	744731681
744731822	744736332			

	Before change	After change
		
Tray dimensions		

	<table><tr><td></td><td></td><td>A0</td><td>B0</td></tr><tr><td>tolerance</td><td></td><td>typ.</td><td>typ.</td></tr><tr><td>size</td><td>8075</td><td>193,00</td><td>243,00</td></tr></table> <table><tr><td>P0</td><td>P1</td><td>P2</td><td>P3</td></tr><tr><td>ref.</td><td>ref.</td><td>ref.</td><td>ref.</td></tr><tr><td>19,00</td><td>131,20</td><td>17,00</td><td>222,00</td></tr></table> <table><tr><td>T</td><td>Tray</td><td>VPE / packaging unit</td></tr><tr><td>ref.</td><td></td><td>pcs.</td></tr><tr><td>9,50</td><td>PET</td><td>140</td></tr></table>						A0	B0	tolerance		typ.	typ.	size	8075	193,00	243,00	P0	P1	P2	P3	ref.	ref.	ref.	ref.	19,00	131,20	17,00	222,00	T	Tray	VPE / packaging unit	ref.		pcs.	9,50	PET	140	<table><tr><td></td><td>L (mm)</td><td>L1 (mm)</td><td>L2 (mm)</td><td>CL (mm)</td></tr><tr><td>Tolerance</td><td>typ.</td><td>typ.</td><td>typ.</td><td>typ.</td></tr><tr><td>Value</td><td>245</td><td>183,7</td><td>40</td><td>7,5</td></tr></table> <table><tr><td></td><td>W (mm)</td><td>W1 (mm)</td><td>W2 (mm)</td><td>CW (mm)</td></tr><tr><td>Tolerance</td><td>typ.</td><td>typ.</td><td>typ.</td><td>typ.</td></tr><tr><td>Value</td><td>195</td><td>151,2</td><td>16,8</td><td>8</td></tr></table> <table><tr><td></td><td>H (mm)</td><td>CH (mm)</td><td>Qty. (pcs.)</td><td>Material</td></tr><tr><td>Tolerance</td><td>typ.</td><td>typ.</td><td></td><td></td></tr><tr><td>Value</td><td>17</td><td>9,9</td><td>100</td><td>PS</td></tr></table>					L (mm)	L1 (mm)	L2 (mm)	CL (mm)	Tolerance	typ.	typ.	typ.	typ.	Value	245	183,7	40	7,5		W (mm)	W1 (mm)	W2 (mm)	CW (mm)	Tolerance	typ.	typ.	typ.	typ.	Value	195	151,2	16,8	8		H (mm)	CH (mm)	Qty. (pcs.)	Material	Tolerance	typ.	typ.			Value	17	9,9	100	PS
		A0	B0																																																																																			
tolerance		typ.	typ.																																																																																			
size	8075	193,00	243,00																																																																																			
P0	P1	P2	P3																																																																																			
ref.	ref.	ref.	ref.																																																																																			
19,00	131,20	17,00	222,00																																																																																			
T	Tray	VPE / packaging unit																																																																																				
ref.		pcs.																																																																																				
9,50	PET	140																																																																																				
	L (mm)	L1 (mm)	L2 (mm)	CL (mm)																																																																																		
Tolerance	typ.	typ.	typ.	typ.																																																																																		
Value	245	183,7	40	7,5																																																																																		
	W (mm)	W1 (mm)	W2 (mm)	CW (mm)																																																																																		
Tolerance	typ.	typ.	typ.	typ.																																																																																		
Value	195	151,2	16,8	8																																																																																		
	H (mm)	CH (mm)	Qty. (pcs.)	Material																																																																																		
Tolerance	typ.	typ.																																																																																				
Value	17	9,9	100	PS																																																																																		
Carton dimensions	 <table><tr><td></td><td>LC (mm)</td><td>WC (mm)</td><td>HC (mm)</td><td>Qty. (pcs.)</td><td>Material</td></tr><tr><td>Tolerance</td><td>typ.</td><td>typ.</td><td>typ.</td><td></td><td></td></tr><tr><td>Value</td><td>275</td><td>232</td><td>255</td><td>2800</td><td>Paper</td></tr></table>					LC (mm)	WC (mm)	HC (mm)	Qty. (pcs.)	Material	Tolerance	typ.	typ.	typ.			Value	275	232	255	2800	Paper	 <table><tr><td></td><td>LC (mm)</td><td>WC (mm)</td><td>HC (mm)</td><td>Qty. (pcs.)</td><td>Material</td></tr><tr><td>Tolerance</td><td>typ.</td><td>typ.</td><td>typ.</td><td></td><td></td></tr><tr><td>Value</td><td>275</td><td>232</td><td>255</td><td>1500</td><td>Paper</td></tr></table>					LC (mm)	WC (mm)	HC (mm)	Qty. (pcs.)	Material	Tolerance	typ.	typ.	typ.			Value	275	232	255	1500	Paper																																										
	LC (mm)	WC (mm)	HC (mm)	Qty. (pcs.)	Material																																																																																	
Tolerance	typ.	typ.	typ.																																																																																			
Value	275	232	255	2800	Paper																																																																																	
	LC (mm)	WC (mm)	HC (mm)	Qty. (pcs.)	Material																																																																																	
Tolerance	typ.	typ.	typ.																																																																																			
Value	275	232	255	1500	Paper																																																																																	

Reliability / Qualification Summary:

Product approval is according to the specification criteria and is internally released by the Product Management Department.

The following items are part of the internal release process:

- Vertical Impact Test by Dropping / DIN EN 2248