
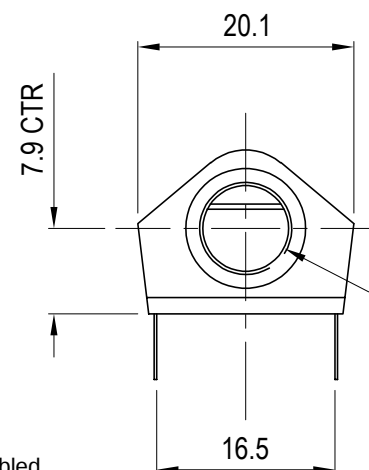




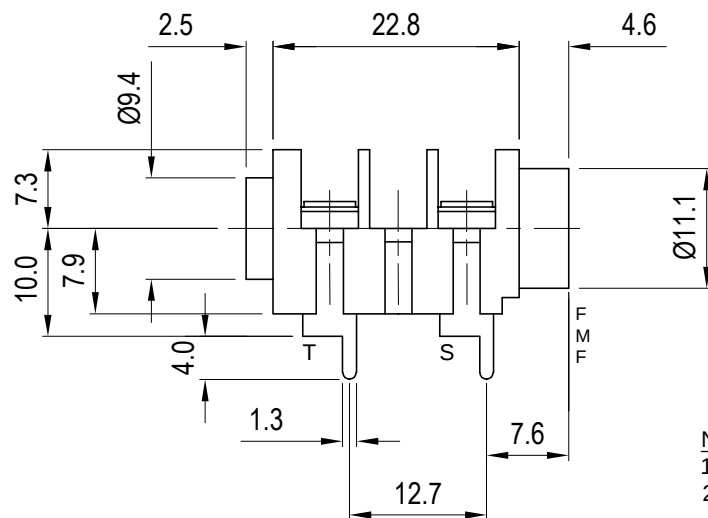


INTERNAL THREAD
3/8" BSF x 20 TPI

NOTES


1. Supplied with Nut, Bezel & Washers assembled.
2. Maximum panel thickness 4.3mm.

SPECIFICATION

Withstand voltage:	2000V DC Min.
Maximum Current:	5A
Temperature Rating:	-10° C to +70° C
Life (Minimum):	10,000+ Operations
Nominal Contact Resistance:	<50mΩ



SWITCH CONTACTS OPEN
WHEN PLUG IS INSERTED,
CLOSE WHEN PLUG IS
WITHDRAWN.

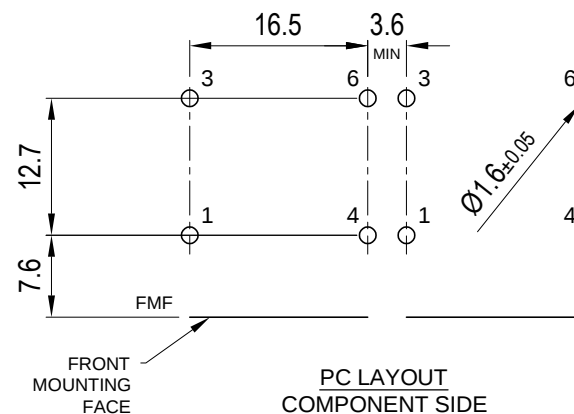

1st DRAWN : 11/01/1991

RoHS
✓ COMPLIANT

TOLERANCE

NO DEC. PLACE ±
1 DEC. PLACE ±
2 DEC. PLACE ±
HOLE Ø ±
ANGLES ±
UNLESS
OTHERWISE STATED

DO NOT SCALE

Cliff Electronic Components Ltd.

76 Holmethorpe Avenue, Holmethorpe Industrial Estate,
Redhill, Surrey, RH1 2PF, England, UK
01737-771375 Fax: 01737-766012 Website: www.cliffuk.co.uk

DIMENSIONS IN MILLIMETERS UNLESS OTHERWISE STATED. WORK TO DIMENSIONS. REMOVE ALL BURRS. IF IN DOUBT ASK.

MATERIAL: NYLON (UL94 V-2) / NiAg / FIBRE / POM (HB) / BRASS

FINISH: BLACK / GOLD / CHROME

DRAWN: T.J.O.

APPROVED: DPJ

TITLE: S4/BNB/PCA/GOLD/ASSEMBLED

DRWG. No.	CL1308GA
-----------	----------

FORM: A4DRWGH

THE CONTENTS OF THIS DOCUMENT MUST NOT BE COPIED OR DISCLOSED
TO A 3rd PARTY WITHOUT WRITTEN PERMISSION OF CLIFF UK. © 1991