


Quartz Crystal


SMD-version

part no.	12.86508
model	KX – 6
frequency	16.0 MHz
mode	fundamental
operating temperature	-20° ~ +70°C
storage temperature	-40° ~ +125°C
frequency tolerance at +25°C	±30 ppm
temperature tolerance -20° ~ +70°C	±50 ppm
load capacitance C_L	10 pF
series resistance R_1 (max.) max.	100 Ohm
aging at 25°C (first year) max.	±2 ppm
shunt capacitance C_0 max.	3.5 pF
drive level max.	100 µW
AEC-Q200	qualified
contents of reel	1000 pcs.


Dimensions:

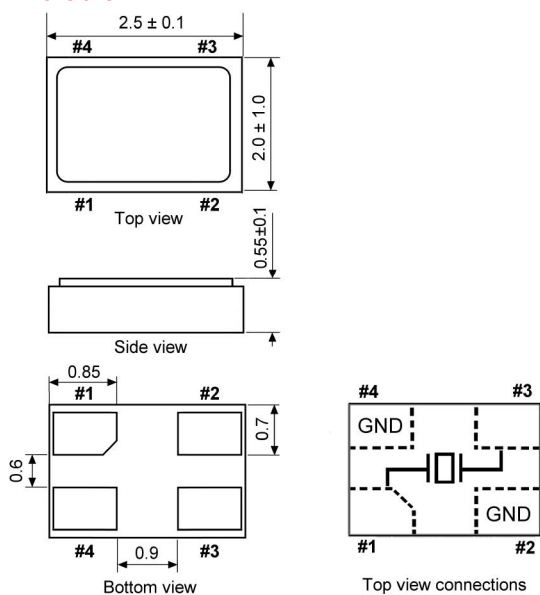

Suggested soldering pad:



Reflow soldering condition:

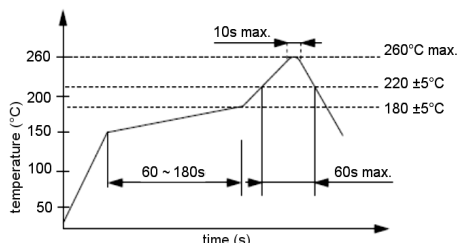

Tape specification:

