
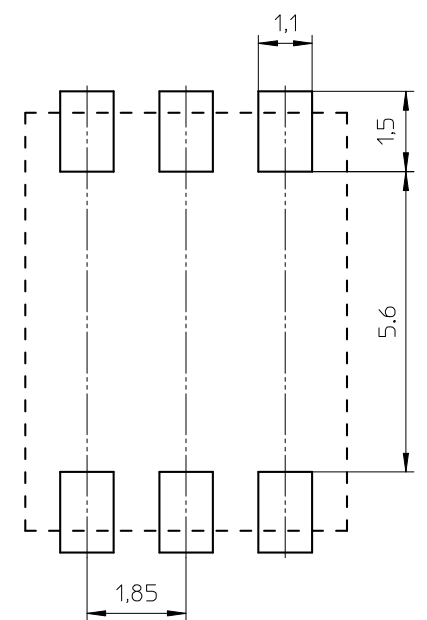
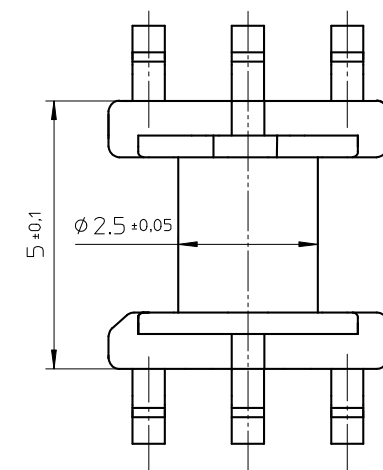
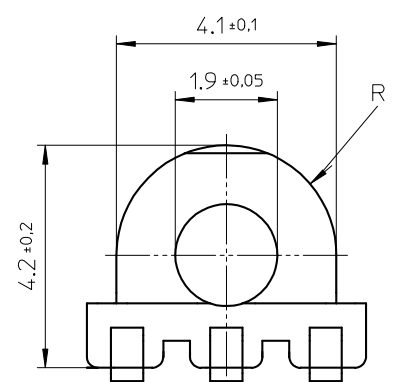


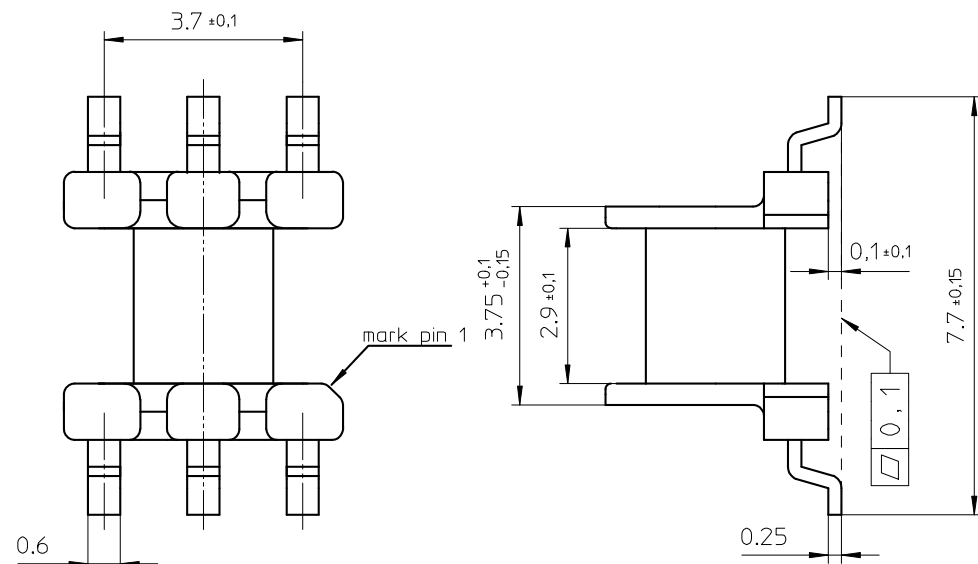

Coil former material: Sumikon PM9630 (PF).
 UL file number: E41429 - UL94V-0

Pin material: CuSn - Ni flash, Sn plated

Max. operating temp.: acc. to IEC 60 085 class F, 155°C

Resistance to soldering heat: acc. to IEC 60 068-2-20 Test Ta, method 1B, 350°C - 3,5sec.

Solderability: acc. 60 068-2-20 Part 2, Test Ta, method 1, 235°C - 2sec.

Min. winding area: 1.89 mm²

Mean length of turn: 10,5 mm

CLASSNO.		CPHS-EP5-1S-6P				4322 021 03661				2000-12-05			
												2005-03-08	
												2008-07-15	
												2010-06-07	
												2010-09-15	
NAME	M.Trynqiel	SUPERS.				001	SH SH	112	-	001	069	A3	
MPA		CHECK											
		CONTR.	DAT.	00-12-05	Property of		Eigendom van	© FERROXCUBE 2000					