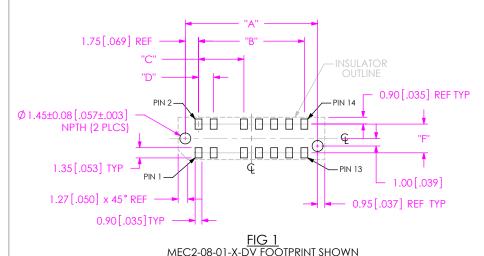
RECOMMENDED PCB LAYOUT FOR MEC2-XX-XX-XX-XXX-XX

6/27/2016 ECN-278537

DESIGNED & DIMENSIONED IN MILLIMETERS [ENGLISH]



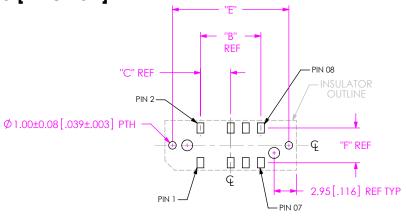


FIG 2 MEC2-05-02-X-DV-WT FOOTPRINT SHOWN (SAME AS FIG 1, EXCEPT AS SHOWN)

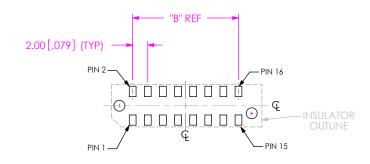


FIG 3 MEC2-08-01-X-DV-NP FOOTPRINT SHOWN (SAME AS FIG 1, EXCEPT AS SHOWN)

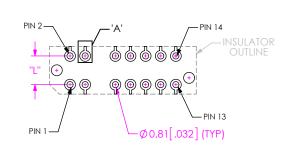


FIG 4
MEC2-08-02-X-THX-XX FOOTPRINT SHOWN
(SAME AS FIG 1, EXCEPT AS SHOWN)

TABLE 3			
No OF POS	POLARIZED POSITIONS		
**-05	3, 4		
**-08	5, 6		
**-20	15, 16		
**-30	21, 22		
**-40	31, 32		
**-50	41, 42		

.245 .0490

(** = TOTAL NUMBER OF POSITIONS WILL BE REDUCED BY 2 FOR POLARIZATION)

ALL DIMENSIONS ARE SYMMETRIC ABOUT THE CENTERLINE.

ALL DIMENSIONS ARE STAIMLING ADOUT THE CLINERLINE.							
TABLE 1							
No. OF POS. PER ROW	"A"	"B"	"C"	"D"	"E"		
-05	11.50 [.453]	8.00 [.315]	4.00 [.157]	N/A N/A	15.40 [.606]		
-08	17.50 [.689]	14.00 [.551]	6.00 [.236]	2.00 [.079]	21.40 [.843]		
-20	41.50 [1.634]	38.00 [1.496]	16.00 [0.630]	12.00 [.472]	45.40 [1.787]		
-30	61.50 [2.421]	58.00 [2.283]	22.00 [.866]	18.00 [.709]	65.40 [2.575]		
-4 0	81.50 [3.209]	78.00 [3.071]	32.00 [1.260]	28.00 [1.102]	85.40 [3.362]		
-50	101.50 [3.996]	98.00 [3.858]	42.00 [1.654]	38.00 [1.496]	105.40 [4.150]		

TABLE 2				
CARD THICKNESS	"F"	"K"	"L"	
-01 (.062 in)	3.80 [.150]	5.20 [.205]	3.02 [.119]	
-02 (.093 in)	4.59 [.181]	5.99 [.236]	3.81 [.150]	

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS [INCHES]

TOLERANCES ARE:

DECIMALS ANGLE

X: ± .3[.01] 2 °

XX: ± .13[.005]

XXX: ± .05[.0020]

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSUR TREBUSED BY SAMITES, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON DE ENTITY NOR PROPRIETARY TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CORREST OF SAMITES.

PROPRIETARY NOTE



0.31 .012

520 PARK EAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733 FAX: 812-948-5047 e-Mail info@SAMTEC.com code 55322

REVISION F

RECOMMENDED STENCIL LAYOUT FOR MEC2-XX-XX-XX-XXX-XX

NOTE: STENCIL TO BE 0.152[.0060] THICK.

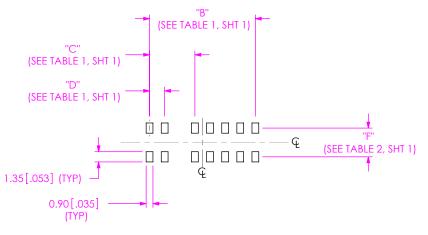


FIG 5 MEC2-08-01-X-DV STENCIL SHOWN

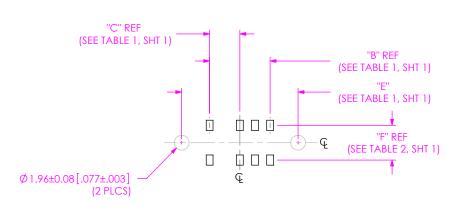


FIG 6 MEC2-05-02-X-DV-WT STENCIL SHOWN (SAME AS FIG 5, EXCEPT AS SHOWN)

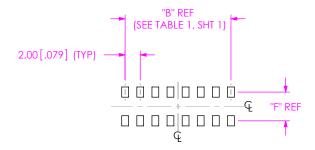


FIG 7 MEC2-08-01-X-DV-NP STENCIL SHOWN (SAME AS FIG 5, EXCEPT AS SHOWN)


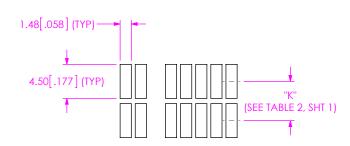


FIG 8 MEC2-08-01-X-THX-XX STENCIL SHOWN (SAME AS FIG 5, EXCEPT AS SHOWN)

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS CONFIDENTIAL AND
PROPRIETARY PROMATION AND ALL DESIGN,
MANUFACTURING, REPRODUCTION, U.S., PATENT RIGHTS
AND SLAES RIGHTS, ARE DEPRESSLY RESERVED BY SAMFEC,
INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE
OR PART, TO ANY UNALITHORIZED PERSON OR ENTITY NOR
REPRODUCED, TRANSFERRED OR INCOMPORATE IN ANY
OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS
WRITTEN CONSENT OF SAMTE, INC.

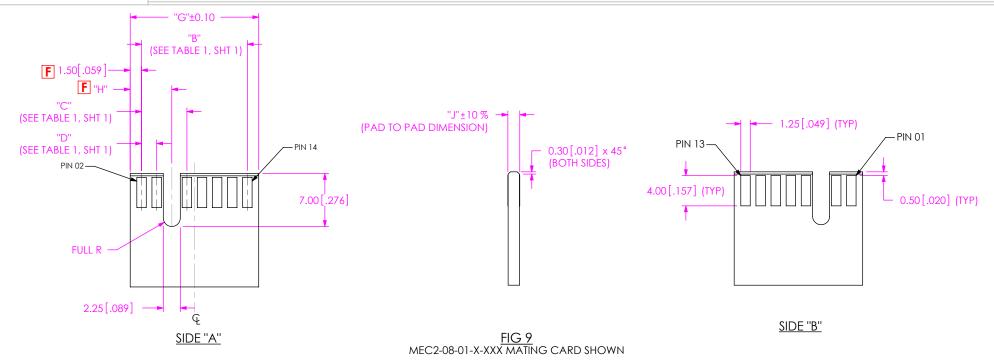

REVISION F RECOMMENDED MATING CARD LAYOUT FOR MEC2-XX-XX-XX-XX-XX-XX



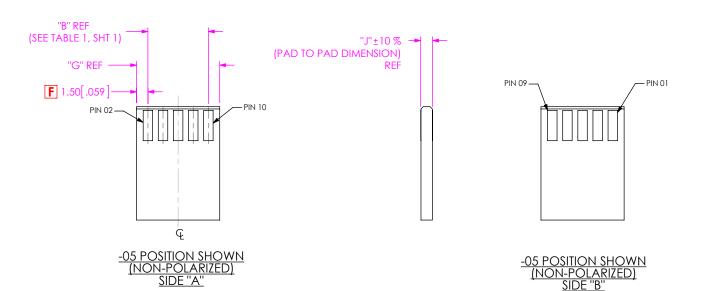


TABLE 4		
CARD	".]"	
THICKNESS	J	
-01 (.062 in)	1.57 [.062]	
-02 (.093 in)	2.36 [.093]	

F

TABLE 5						
No. OF POS. PER ROW	"G"	"H"				
-05	10.95 [.431]	3.50 [.138]				
-08	16.94 [.667]	5.50 [.217]				
-20	40.94 [1.612]	15.50 [.61]				
-30	60.96 [2.400]	21.50 [.846]				
-40	80.95 [3.187]	31.50 [1.24]				
-50	100.94 [3.974]	41.50 [1.634]				

NOTES:

1. ALL DIMENSIONS ARE SYMMETRIC ABOUT THE CENTERLINE.
2. PLATING TO BE .000030 INCHES GOLD WITH A HARDNESS OF 130-200 KNOOP PER ASTM B 488 TYPE 2, GRADE C.

FIG 10 MEC2-08-01-X-XXX-NP MATING CARD SHOWN (SAME AS FIG 9, EXCEPT AS SHOWN)

* PROPRIETARY NOTE
THIS DOCUMENT CONTAINS CONFIDENTIAL AND
PROPRIETARY INFORMATION AND ALL DESIGN,
MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS
AND SALES RIGHTS ARE EXPRESS BY RESERVED BY SAMPTEC,
INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE
OR PART, TO ANY UNALITHORIZED PERSON OR ENTITY NOR
REPRODUCED, TRANSFERRED OR INCORPORATE IN ANY
OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS
WRITTEN CONSENT OF SAMPTEC, IN



520 PARK EAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733 FAX: 812-948-5047 e-Mail info@SAMTEC.com code 55322

SHEET 3 OF 3