



Product / Process Change Notification (PCN)

- ☐ Major Change
☒ Minor Change

PCN Number: PCN_WCAP-CSRF_20240621

Affected Series: WCAP-CSRF

Affected Order Codes: 885392050XX

PCN Date: 2024-03-21 (YYYY-MM-DD)

Effective Date: 2024-06-21 (YYYY-MM-DD)

Change Category:

- ☐ Equipment/Location
☒ General Data
☐ Material
☐ Process
☐ Product Design
☐ Shipping/Packaging
☐ Supplier
☐ Software

Contact: Product Management

Phone: +49 (0) 7942 - 945 5001

Fax: +49 (0) 7942 - 945 5179

E-Mail: pcn.eisos@we-online.com

Datasheet Change:

- ☒ Yes ☐ No

Attachment:

- ☐ Yes ☒ No

Description of Change:

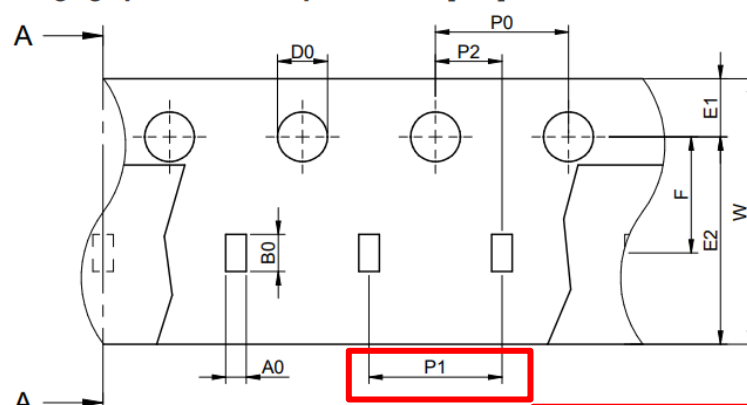
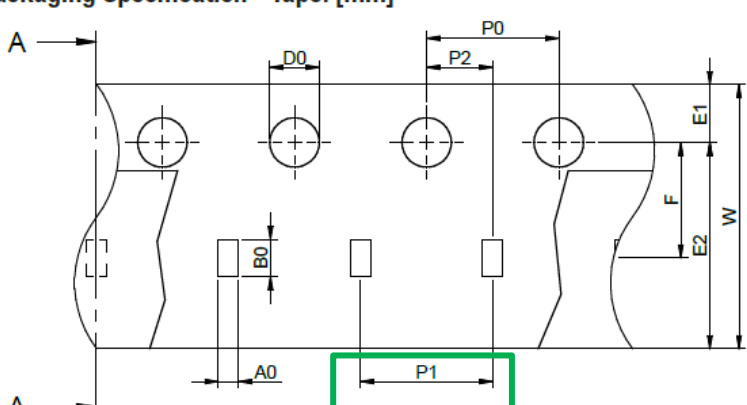
Because of a database mismatch, Würth Elektronik will update the packaging specification in the datasheets for 14 order codes of WCAP-CSRF series.

This is a datasheet correction only. There will be no change in form, fit, function, quality or reliability of the product.

(See next page)

Details of Change:

Corrected dimensions and tolerances are marked with a red box **before change** and green box **after change**.

Effected Order Codes	885392005001, 885392005002, 885392005003, 885392005004, 885392005005, 885392005006, 885392005007, 885392005008, 885392005009, 885392005010, 885392005011, 885392005012, 885392005013, 885392005014																											
Before Change	Packaging Specification - Tape and Reel: [mm]  packaging is referred to the international standard IEC 60286-3:2013 <table><tr><td></td><td>A0</td><td>B0</td><td>W</td><td>T</td><td>T1</td><td>P0</td><td>P1</td><td>P2</td></tr><tr><td>tolerance</td><td>typ.</td><td>typ.</td><td>+0,3/ -0,1</td><td>ref.</td><td>max.</td><td>±0,1</td><td>±0,1</td><td>±0,05</td></tr><tr><td>value</td><td>0,70</td><td>1,20</td><td>8,00</td><td>0,80</td><td>0,10</td><td>4,00</td><td>4,00</td><td>2,00</td></tr></table>		A0	B0	W	T	T1	P0	P1	P2	tolerance	typ.	typ.	+0,3/ -0,1	ref.	max.	±0,1	±0,1	±0,05	value	0,70	1,20	8,00	0,80	0,10	4,00	4,00	2,00
	A0	B0	W	T	T1	P0	P1	P2																				
tolerance	typ.	typ.	+0,3/ -0,1	ref.	max.	±0,1	±0,1	±0,05																				
value	0,70	1,20	8,00	0,80	0,10	4,00	4,00	2,00																				
After Change	Packaging Specification - Tape: [mm]  Packaging is referred to the international standard IEC 60286-3:2019 <table><tr><td>Tape Type</td><td>A0 (mm)</td><td>B0 (mm)</td><td>W (mm)</td><td>T (mm)</td><td>T1 (mm)</td><td>P0 (mm)</td><td>P1 (mm)</td><td>P2 (mm)</td></tr><tr><td></td><td>typ.</td><td>typ.</td><td>+0,3/ -0,1</td><td>ref.</td><td>ref.</td><td>±0,1</td><td>±0,05</td><td>±0,05</td></tr><tr><td>1a</td><td>0,40</td><td>0,70</td><td>8,00</td><td>0,55</td><td>0,10</td><td>4,00</td><td>2,00</td><td>2,00</td></tr></table>	Tape Type	A0 (mm)	B0 (mm)	W (mm)	T (mm)	T1 (mm)	P0 (mm)	P1 (mm)	P2 (mm)		typ.	typ.	+0,3/ -0,1	ref.	ref.	±0,1	±0,05	±0,05	1a	0,40	0,70	8,00	0,55	0,10	4,00	2,00	2,00
Tape Type	A0 (mm)	B0 (mm)	W (mm)	T (mm)	T1 (mm)	P0 (mm)	P1 (mm)	P2 (mm)																				
	typ.	typ.	+0,3/ -0,1	ref.	ref.	±0,1	±0,05	±0,05																				
1a	0,40	0,70	8,00	0,55	0,10	4,00	2,00	2,00																				

Reliability / Qualification of Change:

There will be no change of the product, therefore no additional reliability or qualification testing was performed.