


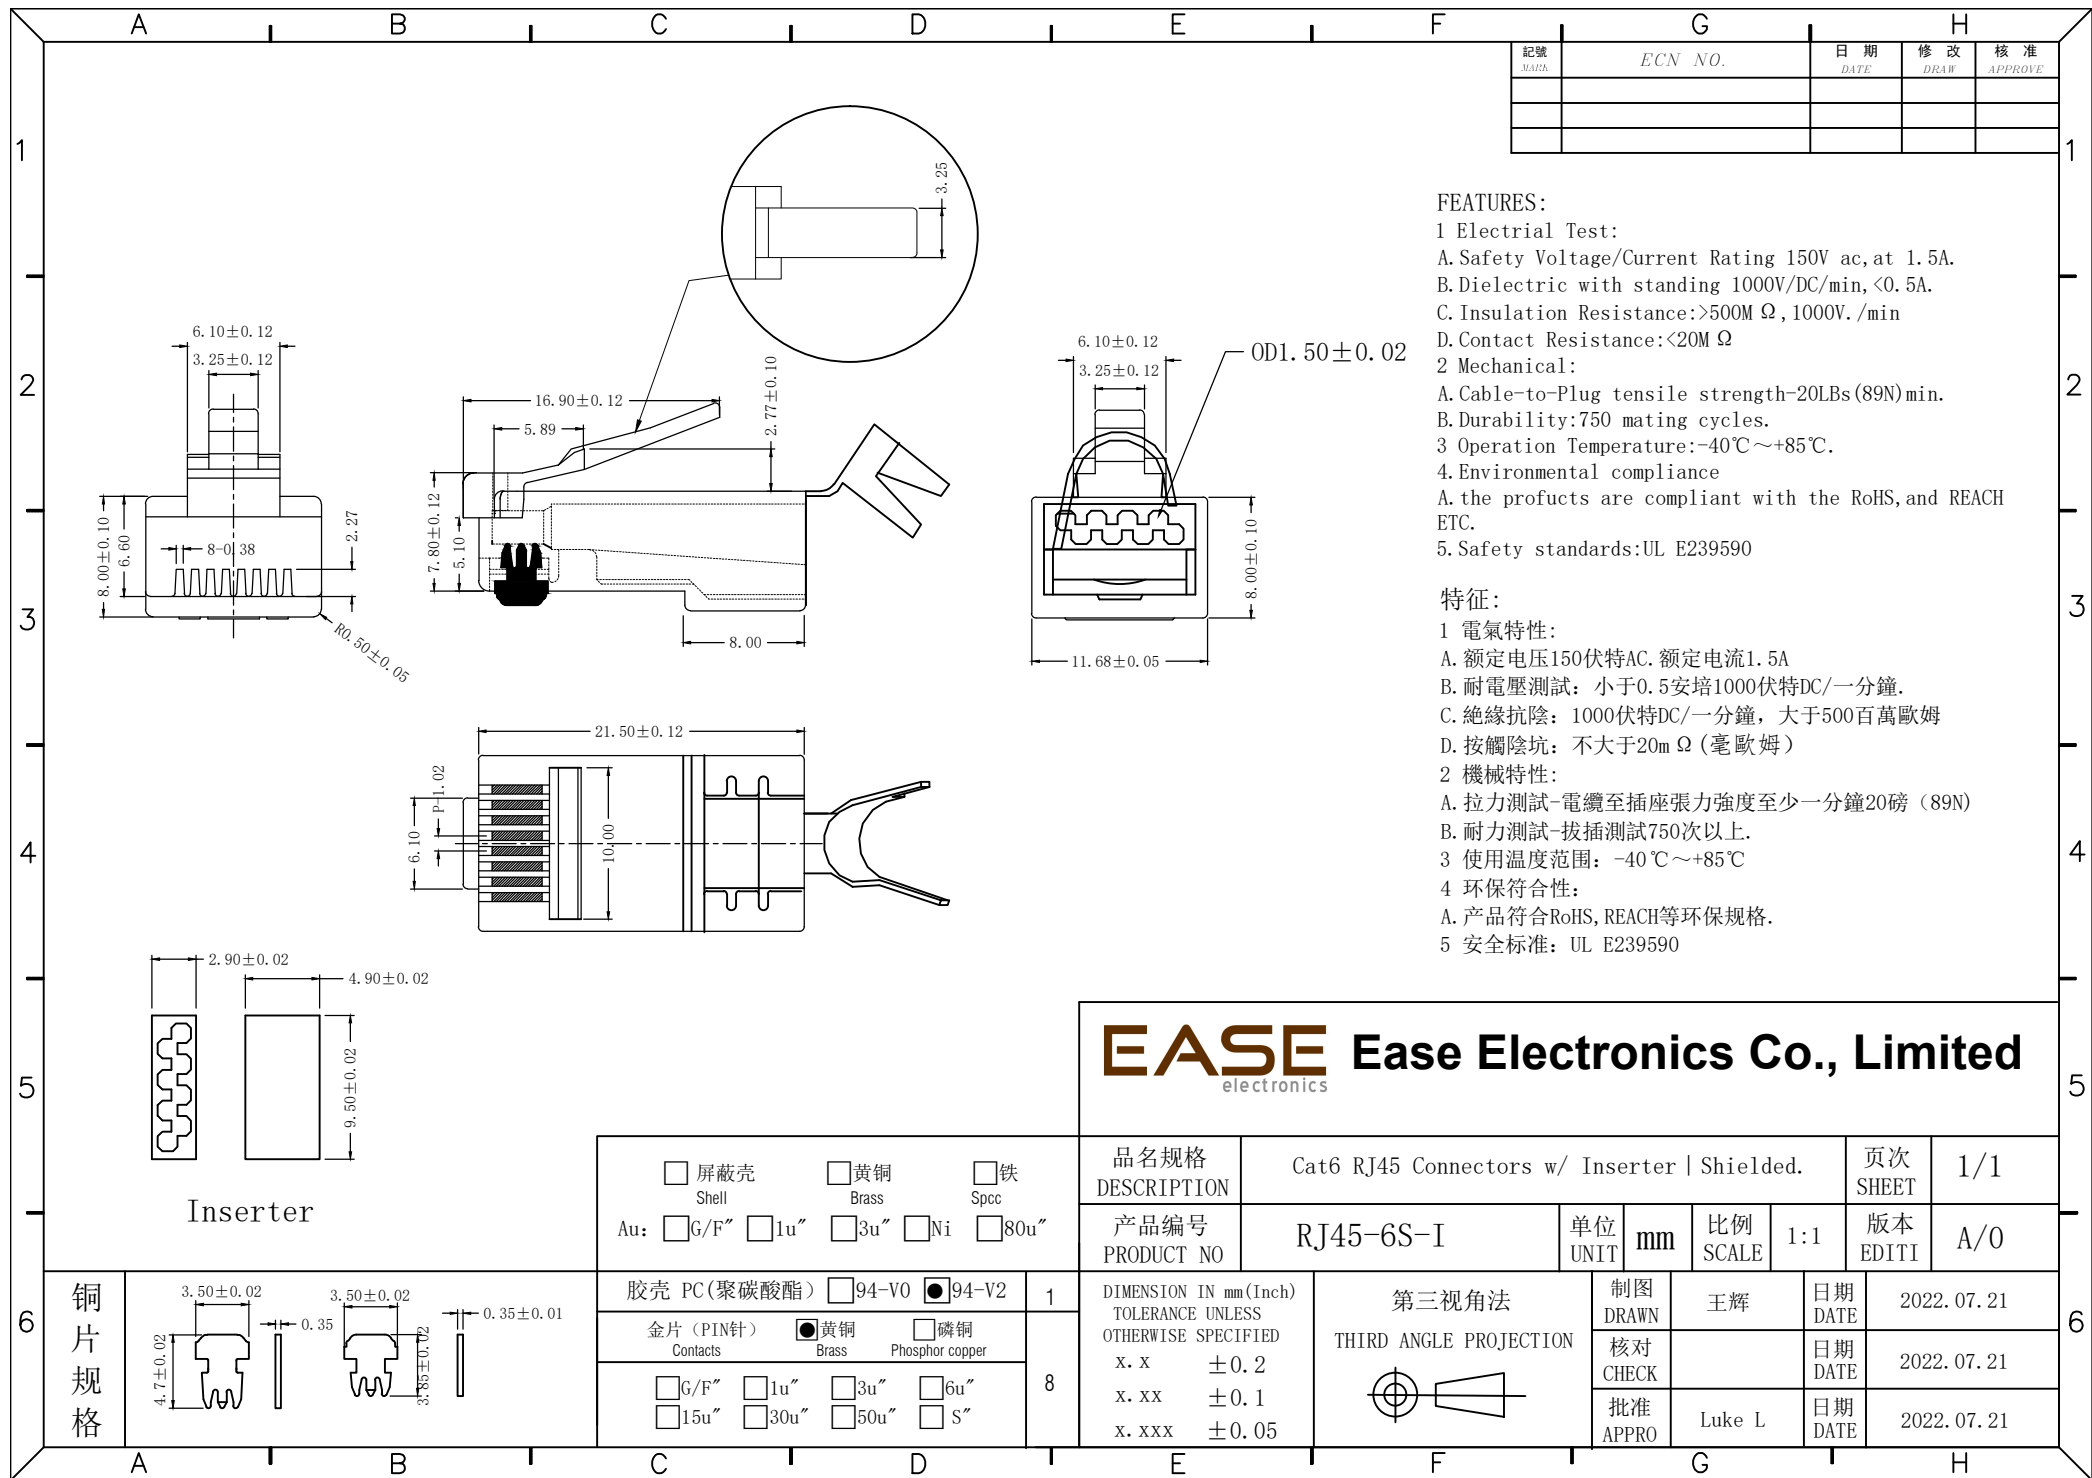

FEATURES:

1 Electrical Test:

A. Safety Voltage/Current Rating 150V ac, at 1.5A.

B. Dielectric with standing 1000V/DC/min, <0.5A.

C. Insulation Resistance: >500M Ω, 1000V./min

D. Contact Resistance: <20M Ω

2 Mechanical:

A. Cable-to-Plug tensile strength-20LBs (89N) min.

B. Durability: 750 mating cycles.

3 Operation Temperature: -40℃ ~ +85℃.

4. Environmental compliance

A. the products are compliant with the RoHS, and REACH ETC.

5. Safety standards: UL E239590

特征:

1 电气特性:

A. 额定电压150伏特AC. 额定电流1.5A

B. 耐电压测试: 小于0.5安培1000伏特DC/一分钟.

C. 绝缘抗阴: 1000伏特DC/一分钟, 大于500百萬歐姆

D. 接觸陰坑: 不大于20m Ω (毫歐姆)

2 機械特性:

A. 拉力测试-電纜至插座張力強度至少一分钟20磅 (89N)

B. 耐力测试-拔插测试750次以上.

3 使用温度范围: -40℃ ~ +85℃

4 环保符合性:

A. 产品符合RoHS, REACH等环保规格.

5 安全标准: UL E239590

EASE Ease Electronics Co., Limited

品名规格
DESCRIPTION

Cat6 RJ45 Connectors w/ Inserter | Shielded.

页次
SHEET

1/1

产品编号
PRODUCT NO

RJ45-6S-I

单位
UNIT

mm

比例
SCALE

1:1

版本
EDITI


A/0

DIMENSION IN mm(Inch)
TOLERANCE UNLESS
OTHERWISE SPECIFIED

x. x ± 0.2
x. xx ± 0.1
x. xxx ± 0.05

第三视角法

THIRD ANGLE PROJECTION



制图
DRAWN

王辉

日期
DATE

2022.07.21

核对
CHECK

日期
DATE

2022.07.21

批准
APPRO

Luke L

日期
DATE

2022.07.21

铜片规格

