


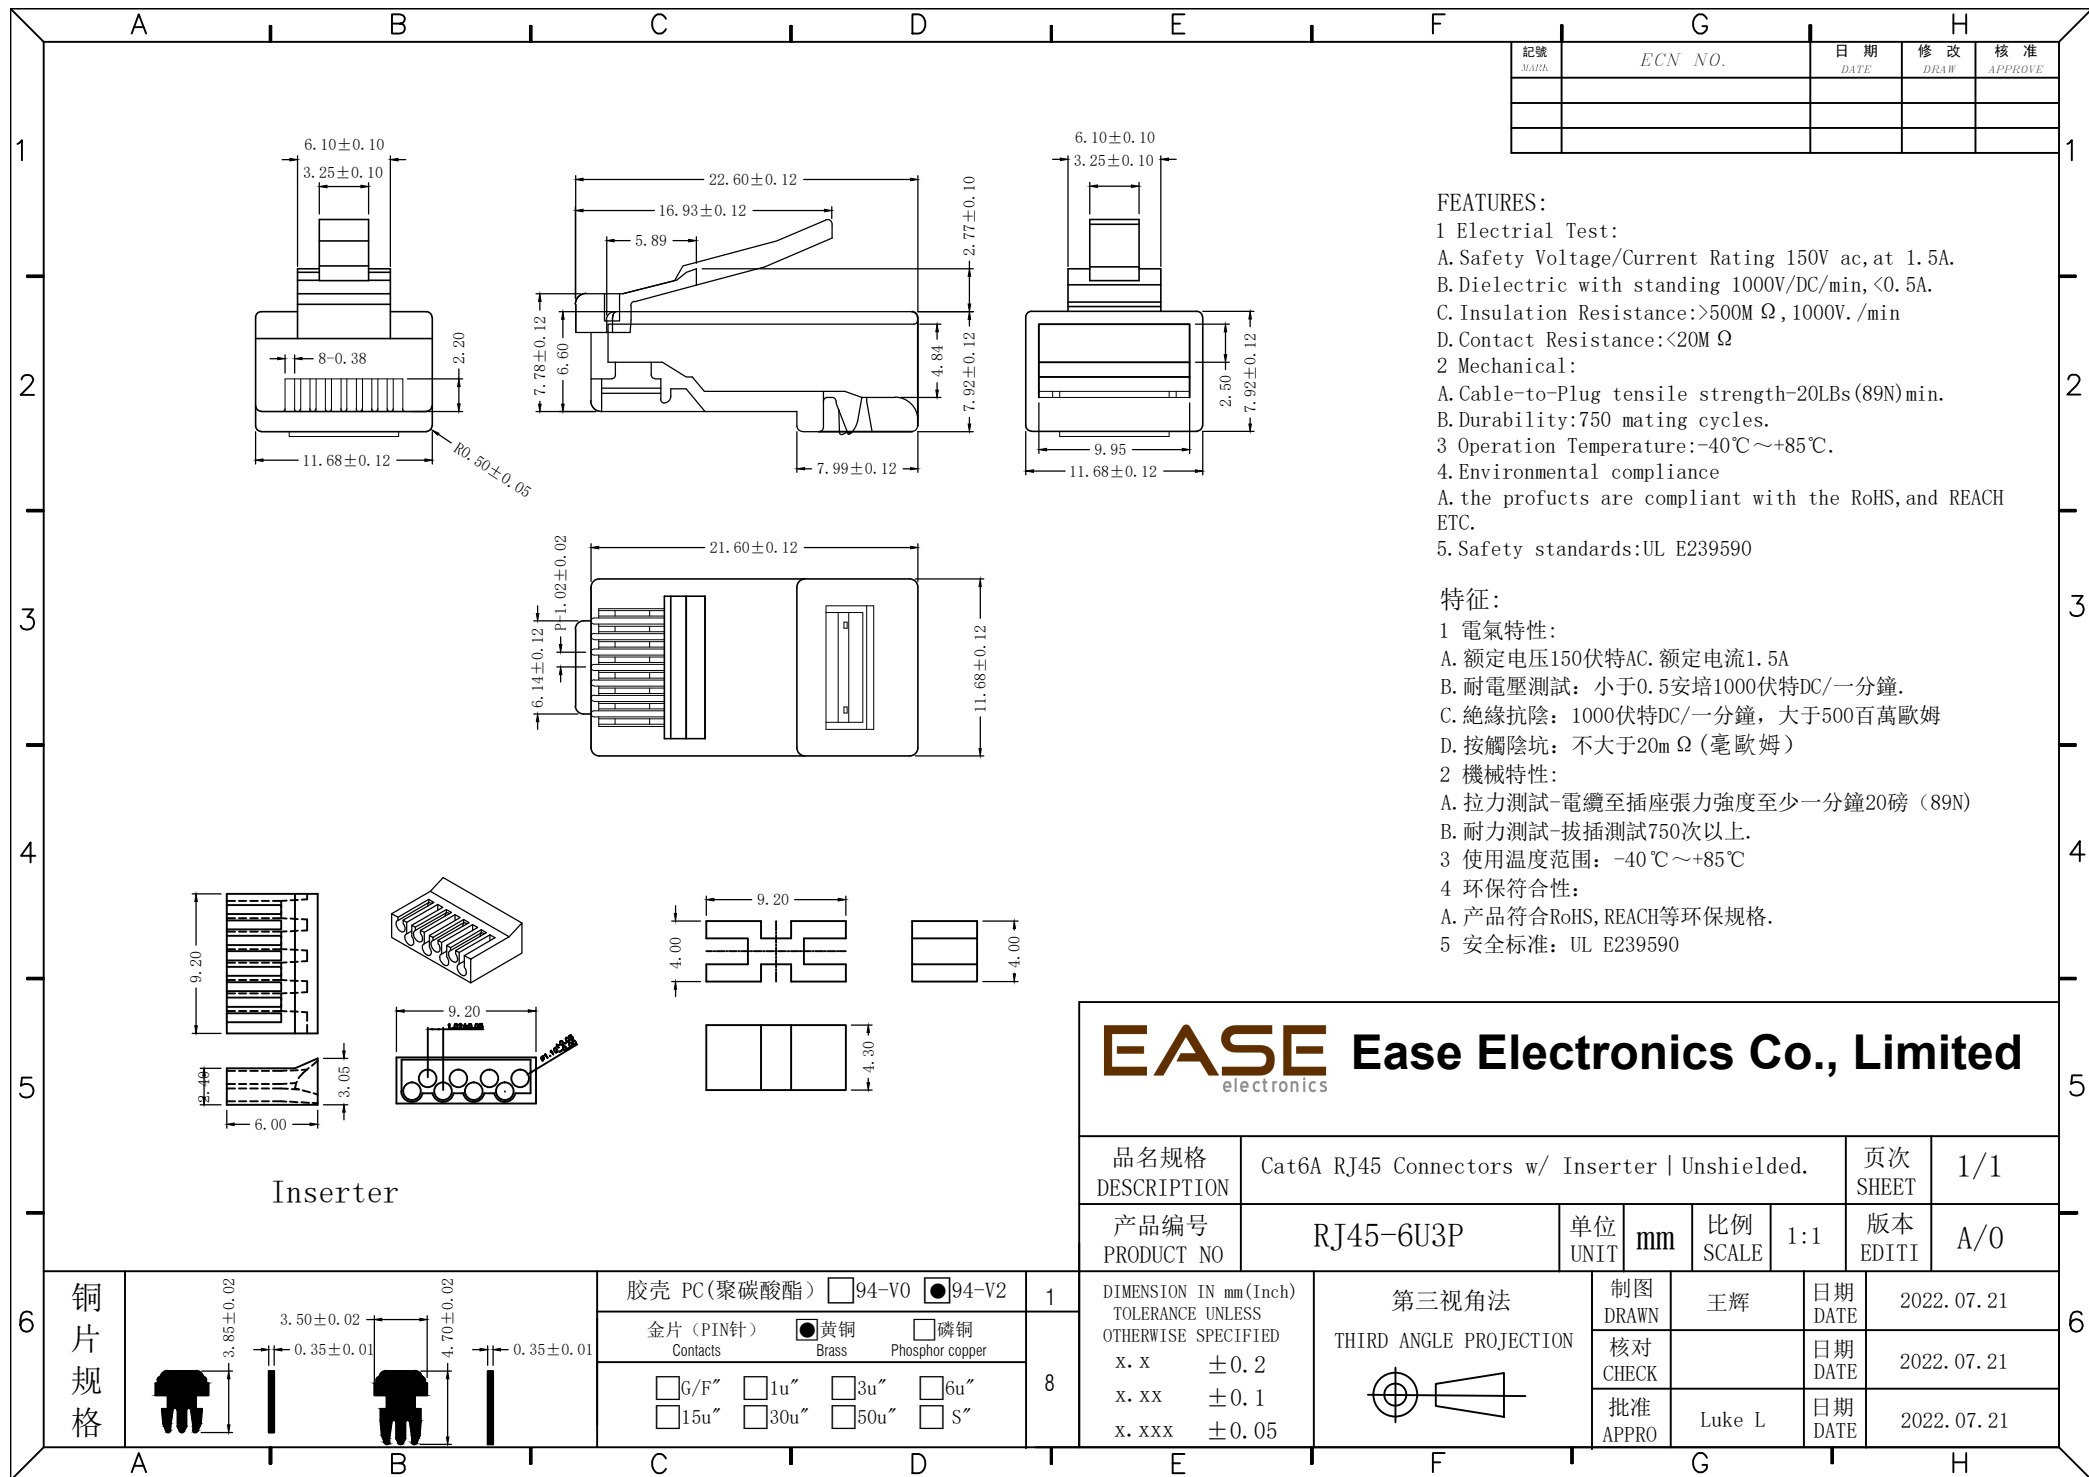

記號 MARK	ECN NO.	日期 DATE	修改 DRAW	核准 APPROVE

FEATURES:

1 Electrical Test:

A. Safety Voltage/Current Rating 150V ac, at 1.5A.

B. Dielectric with standing 1000V/DC/min, <0.5A.

C. Insulation Resistance: >500M Ω, 1000V./min

D. Contact Resistance: <20M Ω

2 Mechanical:

A. Cable-to-Plug tensile strength-20LBs (89N) min.

B. Durability: 750 mating cycles.

3 Operation Temperature: -40℃ ~ +85℃.

4. Environmental compliance

A. the products are compliant with the RoHS, and REACH ETC.

5. Safety standards: UL E239590

特征:

1 電氣特性:

A. 额定电压150伏特AC. 额定电流1.5A

B. 耐電壓測試: 小于0.5安培1000伏特DC/一分鐘.

C. 絕緣抗陰: 1000伏特DC/一分鐘, 大于500百萬歐姆

D. 接觸陰坑: 不大于20m Ω (毫歐姆)

2 機械特性:

A. 拉力測試-電纜至插座張力強度至少一分鐘20磅 (89N)

B. 耐力測試-拔插測試750次以上.

3 使用溫度範圍: -40℃ ~ +85℃

4 環保符合性:

A. 產品符合RoHS, REACH等環保規格.

5 安全標準: UL E239590

EASEelectronics

Ease Electronics Co., Limited

品名规格 DESCRIPTION	Cat6A RJ45 Connectors w/ Inserter Unshielded.				页次 SHEET	1/1	
产品编号 PRODUCT NO	RJ45-6U3P	单位 UNIT	mm	比例 SCALE	1:1	版本 EDITI	A/0

制图 DRAWN	王辉	日期 DATE	2022.07.21
核对 CHECK		日期 DATE	2022.07.21
批准 APPRO	Luke L	日期 DATE	2022.07.21