


TJC3 型条形连接器
TJC3 Bar Connector

间距 (space) :2.5mm

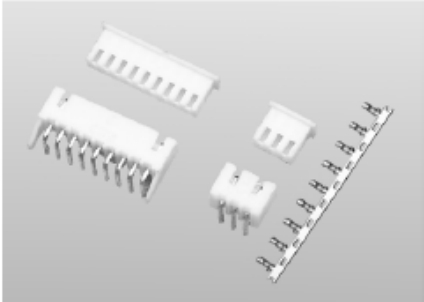


技术参数 (SPECIFICATIONS)

适用线规 (Applicable wires) : AWG28#~22#
适应基板厚度 (Applicable PC board thickness) : 1.6mm
温度范围 (Temprature range) : -25℃~85℃
额定电压 (Voltage rating) : 250V AC/DC
额定电流 (Current rating) : 3A
接触电阻 (Contact resistance) : $\leq 0.01\Omega$
绝缘电阻 (Insulation resistance) : $\geq 1000M\Omega$
耐压 (Withstand voltage) : 1000V AC/minute


认证 (STANDARDS) :  E200881

端子 TERMINAL



型号 Type	适用导线范围 Wire Range		导线外径 Wire ins.Dis
	mm ²	AWG#	
TJC3	0.08 ~ 0.33	28 ~ 22	1.2 ~ 1.9
材质·表面处理 Material and Finish			
磷青铜 Phos·bronze Tin·Plated			

阴连接器 HOUSING

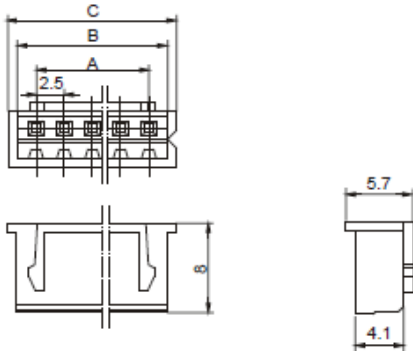

线数 Poles	型号 Type	尺寸 Dimensions(mm)			线数 Poles	型号 Type	尺寸 Dimensions(mm)		
		A	B	C			A	B	C
2	TJC3-2Y	2.5	5.8	7.4	10	TJC3-10Y	22.5	25.8	27.4
3	TJC3-3Y	5.0	8.3	9.9	11	TJC3-11Y	25.0	28.3	29.9
4	TJC3-4Y	7.5	10.8	12.4	12	TJC3-12Y	27.5	30.8	32.4
5	TJC3-5Y	10.0	13.3	14.9	13	TJC3-13Y	30.0	33.3	34.9
6	TJC3-6Y	12.5	15.8	17.4	14	TJC3-14Y	32.5	35.8	37.4
7	TJC3-7Y	15.0	18.3	19.9	15	TJC3-15Y	35.0	38.3	39.9
8	TJC3-8Y	17.5	20.8	22.4	16	TJC3-16Y	37.0	40.8	42.4
9	TJC3-9Y	20.0	23.3	24.9					
材质·表面处理 Material and Finish						PA66 UL94V-0 · White PA66 UL94V-2 · White			