DWG. NO.
SD81415

PLATING TABLE	
CATALOG NO.	
LRM20W-21DJ5	.000050 MIN GOLD OVER NICKEL OVER COPPER FLASH. PER E450

NOTES:

1. THIS PART CONFORMS TO DAC PART #S00023-20P. ANY CHANGE TO THIS DWG. MAY AFFECT DOUGLAS DWG. #S00023.
2. THIS PART MEETS APPLICABLE PERFORMANCE REQUIREMENTS OF MIL-C-39029.
3. MATERIAL: LOW LEADED BRASS.
4. FINISH: SEE PLATING TABLE.

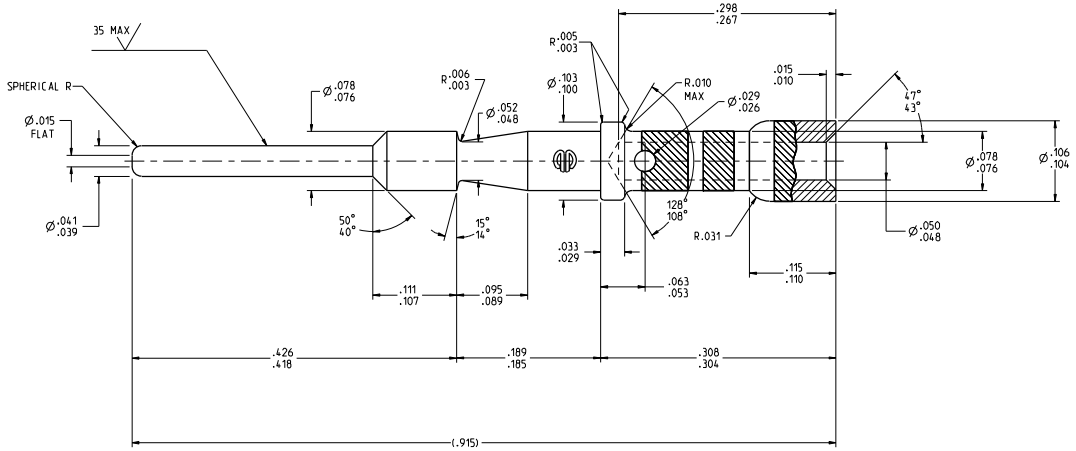



TOOL INDEX*

REF
PD81419

REV	DESCRIPTION	BY DATE	CHKD DATE
E	REVISED PER ECN10186	GRB 02-02-07	FLR 02-02-07
4	ROTATED BURNDY SYMBOL 90° CCW (ECN3155)	DET 01-11-95	RKS 01-11-95
3	.063-.053 WAS .059-.053 (ECN1600)	JAM 12-10-90	SMP 12-10-90
2	REVISED PER MARKED PRINT BERCO EC1088	AJ 05-23-78	DE 05-23-78
1	REVISED MATL CALL OUTS BERCO EC1048	GN 07-27-78	DE 07-22-78

DRAWING TITLE
SMOOTH CONTACT PIN

CAT NO.
LRM20W-21DJ5 (SEE TABLE)

CAGE NO: 09922 | SIZE: C

LINEAR MEASURE: INCH (mm) | INCH [mm]
THIRD ANGLE PROJECTION

TOLERANCES UNLESS OTHERWISE SPECIFIED

No. OF PLACES	INCH [mm]
ONE PLACE	±.1 [±3]
TWO PLACES	±.02 [±0.5]
THREE PLACES	±.010 [±0.25]
ANGLES	±1°

CUSTOMER

INTERPRET THIS DRAWING IN ACCORDANCE WITH ASME Y14.5M - 1994.

SOURIAU Connector Technology
www.souriau.com

APPROVAL		
DRAWN:	GRB	02-02-07
CHKD :	FLR	02-02-07
DSGN :	GRB	02-02-07
MFG :	RR	02-02-07
QC :	DK	02-02-07

DRAWING SCALE: 10:1

DRAWING NO.	REV
SD81415	E

1 OF 1

PRO-E

THIS DRAWING IS A CONTROLLED DOCUMENT FOR SOURIAU USA, INC. COPIES OF THIS DRAWING ARE VALID ONLY FOR THE LATEST REVISION. CONTACT THE DOCUMENT CONTROL CENTER FOR THE LATEST REVISION.

THE INFORMATION CONTAINED IN THIS DRAWING IS CONFIDENTIAL AND MAY NOT BE DISCLOSED WITHOUT WRITTEN CONSENT FROM SOURIAU USA, INC.