


DWG FILE NO:AF-00129B

DESCRIPTION CONTROL


REV	DESC	DATE	ECN NO

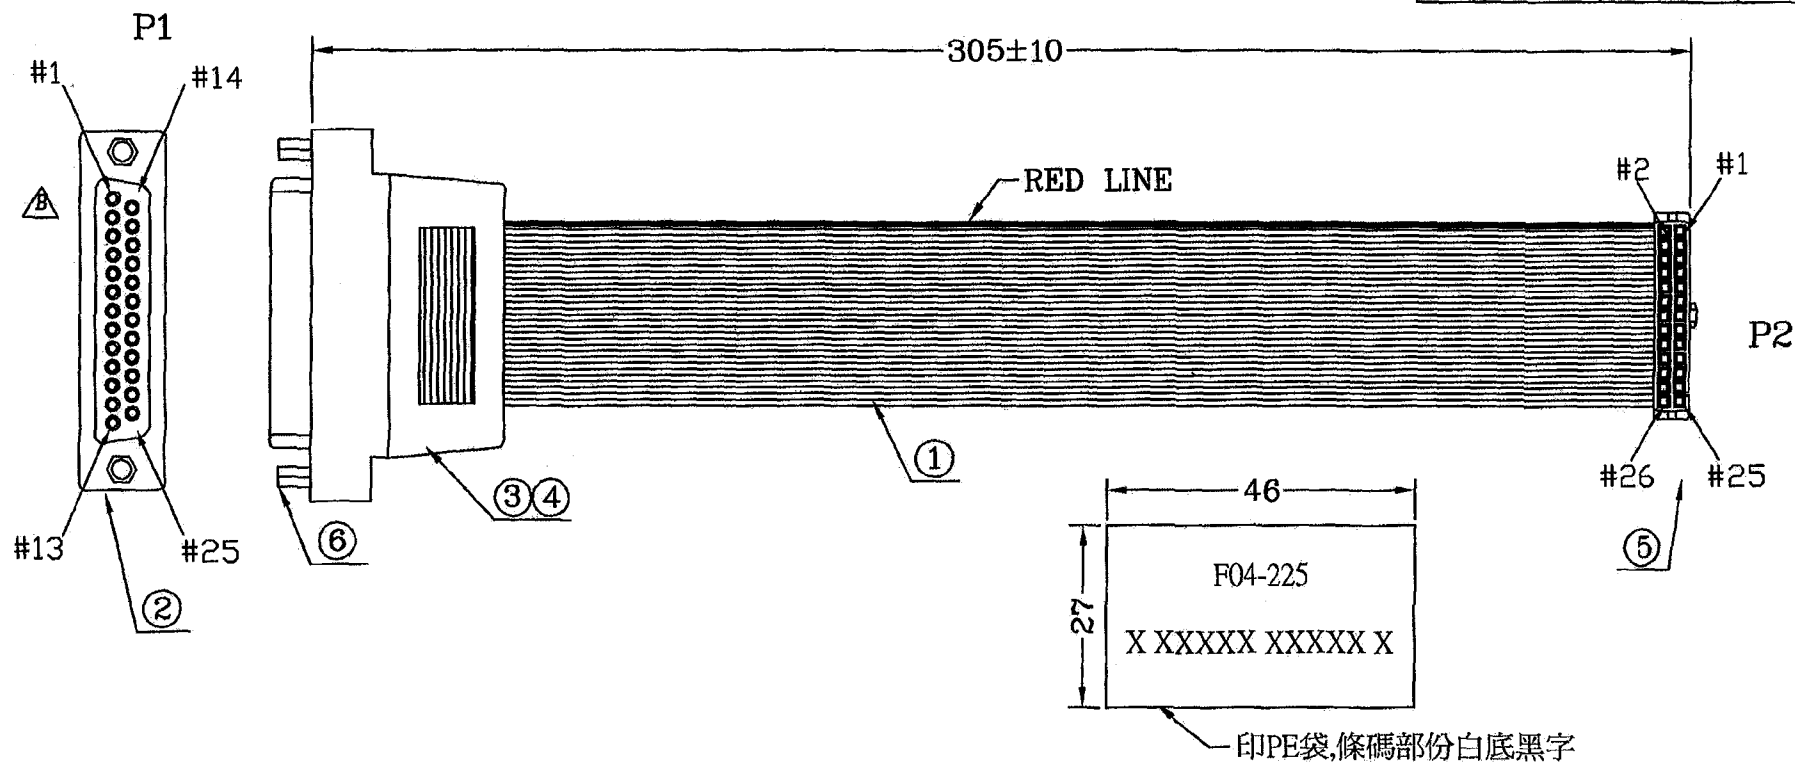

NOTE
REF AF0000000129C

PIN ASSIGNMENT							
P1	P2	P1	P2				
1	2	20	14				
14	2	8	15				
2	3	21	16				
15	4	9	17				
3	5	22	18				
16	6	10	19				
4	7	23	20				
17	8	11	21				
5	9	24	22				
18	10	12	23				
6	11	25	24				
19	12	13	25				
7	13	26(NC)					

NO	PART NO.	DESCRIPTION	QTY	UNIT
*	390	CARTON:46*30*25CM	A/R	PCS
*	390	PE BAG:30*28*0.08MM	A/R	PCS
*	390	PE BAG:4.7*8*0.06MM <印PIN和條碼>	1	PCS
6	240010700003	SRV-4.75*11.8MM(六角)	2	PCS
5	110140026003	IDC-26P(BKX有凸點,二件式)(詠昇料號:110-2601000010)	1	SET
4	130000002009	PCVR-DB25P/BK10(帶螺母)	1	SET
3	220	SOL-WIRE-FULL TIN-1.0	0.63	G
2	110012125001	CDS-25S(BU)	1	PCS
1	100400325002	FALT CABLE:28-25C-GRAY-UL2651(PH1.27MM)	0.305	M



ITEM:	AF000000000129B	REV
		R

DRAW, BY	苗云麗	SCALE:	NONE	DATE:	2007-05-26
CHECK, BY		CUSTOMER:	C337		
APPROVER, BY		CUSTOMER P/N:	F04-225		

ALL DIMENSIONS IN MM