


Quartz Crystal


SMD-version

part no.	12.86606
model	KX – 6T
frequency	12.0 MHz
mode	fundamental
operating temperature	-40° ~ +85°C
frequency tolerance at +25°C	±30 ppm
temperature tolerance -40° ~ +85°C	±30 ppm
load capacitance C_L	10 pF
series resistance R_1 max.	150 Ohm
aging at +25°C (first year) max.	±2 ppm
shunt capacitance C_0 max.	3.5 pF
drive level max.	100 µW
contents of reel	1000 pcs.


Dimensions (mm):

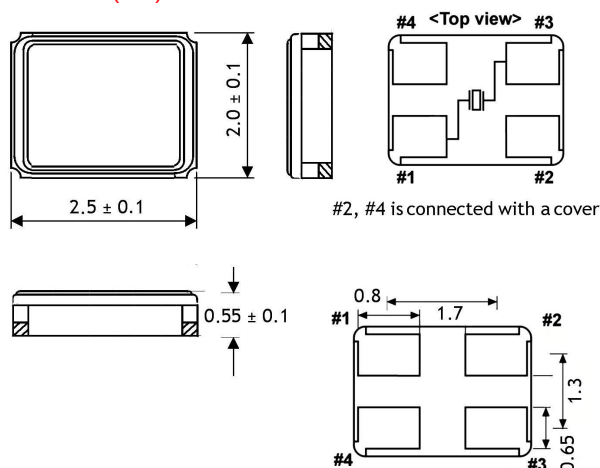


Reflow soldering condition:

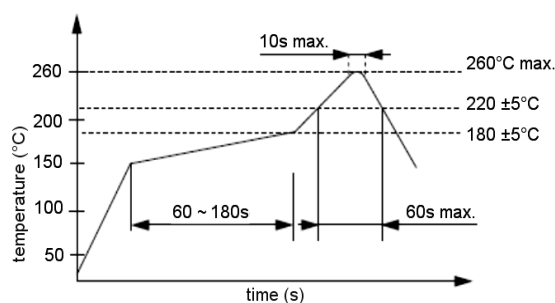

Suggested soldering pad:



Tape specification:

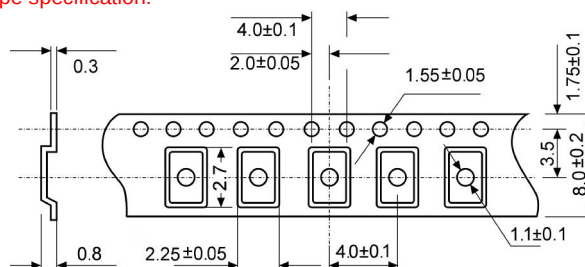

reel diameter 178 mm