

Product Change Notice (PCN)

Date: **5/3/2024**

PCN Number: **PCN-0456212R-01**

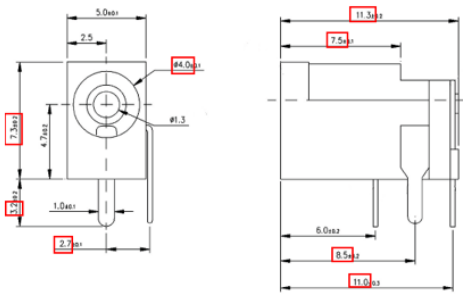
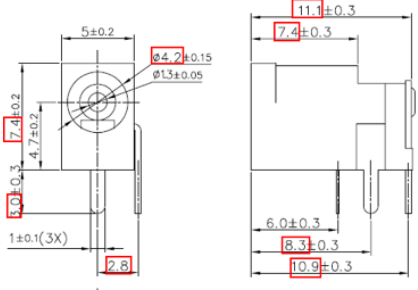


To Our Customers:

We appreciate your use of our products. Our commitment in maintaining and improving processes is demonstrated by plans to enhance our product quality, reliability, and manufacturability. The purpose of this notice is to inform you of a product change.

Product(s) Affected: **PJ-007**

Reason(s) for Change: **Manufacturing Improvement processes**

Description of Change: **Product re-engineered for improved manufacturability and production yield. See image below for product changes. Cosmetic differences may be visible and not affect the form fit and function of the product.**

PREVIOUS CUI DEVICES DETAIL / IMAGE	NEW CUI DEVICES DETAIL / IMAGE
	
 Recommended PCB Layout Top View	 Recommended PCB Layout Top View

PREVIOUS CUI DEVICE'S DETAIL / IMAGE

DESCRIPTION	MATERIAL	PLATING/COLOR
center pin	brass	silver
terminal 1	brass t=0.50	silver
terminal 2	brass t=0.50	silver
terminal 3	brass t=0.50	silver
cover	PA10T (UL94V-0)	black
housing	PA10T (UL94V-0)	black

NEW CUI DEVICE'S DETAIL / IMAGE

DESCRIPTION	MATERIAL	PLATING/COLOR
center pin	brass	CuSn
terminal 1	brass t=0.40	silver
terminal 2	stainless steel t=0.20	silver
terminal 3	brass t=0.40	silver
cover	PA10T (UL94V-0)	black
housing	PA10T (UL94V-0)	black

MATING PLUG
Jack Insertion Depth: 7.0 mm

MATING PLUG
Jack Insertion Depth: 6.2 mm

SPECIFICATIONS

parameter	conditions/description	min	typ	max	units
rated input voltage			24		Vdc
rated input current			3.5		A
contact resistance			50		mΩ
insulation resistance	at 500 Vdc	100			MΩ
voltage withstand			500		Vac
insertion/withdrawal force		0.3	2	5g	
operating temperature		-30		85	°C
life			5,000		cycles
flammability rating	UL94V-0				
RoHS	yes				

SPECIFICATIONS

parameter	conditions/description	min	typ	max	units
rated input voltage			24		Vdc
rated input current			3.5		A
contact resistance			50		mΩ
insulation resistance	at 500 Vdc	100			MΩ
voltage withstand			500		Vac
insertion/withdrawal force		0.3	3	5g	
operating temperature		-30		85	°C
life			5,000		cycles
flammability rating	UL94V-0				
RoHS	yes				

Affected Date Code: All orders placed after **04/26/2024**

Product Availability: *Pertaining to market availability*

PCN Approval:

Operations/Quality



Product Management



F-723-001

Revision: A