

X-LDA-AE Series Datasheet



- 25, 75, 150 mm travel options
- Up to 0.8 m/s speed and up to 4 g acceleration
- High repeatability (200 nm) and accuracy (1 μ m), with 20 nm minimum incremental move
- One digital input and two digital outputs
- Direct position measurement from 1 nm resolution linear encoder
- Non-contact ironless linear motor for high precision, high dynamic performance & zero backlash
- Built-in controller; daisy-chains with other Zaber products
- Technical Article - Linear Motors: Overview and Selection Process


X-LDA-AE Series Overview

Zaber's X-LDA-AE Series devices are computer-controlled, motorized linear stages delivering high speed, precision, and reliability in a compact package. A centrally mounted linear encoder results in up to 1 μm position accuracy and consistent movement steps down to 20 nm. X-LDA-AE devices feature non-cogging ironless linear motors, providing high speed and acceleration capabilities. Both the drive and encoder are non-contact, and have no moving cables, resulting in an extremely robust system.

X-LDA-AE devices are stand-alone units requiring only a standard 48 V power supply. They connect to the RS-232 port or USB port of any computer, and can be daisy-chained with any other Zaber products. The daisy-chain also shares power, making it possible for multiple X-Series products to share a single power supply. Like all of Zaber's products, the X-LDA-AE Series is designed to be 'plug and play' and very easy to set up and operate. X-LDA-AE devices also include a digital input and two digital outputs for interfacing with external systems. An event-driven trigger system allows devices to be programmed for stand-alone operation based on I/O, time, or movement stimuli.

For more information visit: <https://www.zaber.com/products/linear-stages/X-LDA-AE>


X-LDA-AE Series Part Numbering & Options

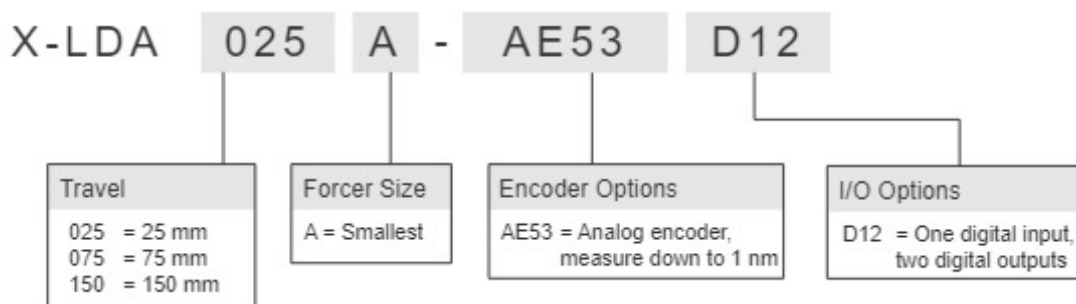

X-LDA-AE Series Drawings




ZABER

X-LDA-AE Direct Drive Linear Stage
dimensions in mm



Model Number*	Nominal Travel	Hard Stop Travel	A
X-LDA025A-AE53D12	25.0	36.0	110.0
X-LDA075A-AE53D12	75.0	81.0	155.0
X-LDA150A-AE53D12	150.0	156.0	230.0

*See product page for complete list of available models at www.zaber.com

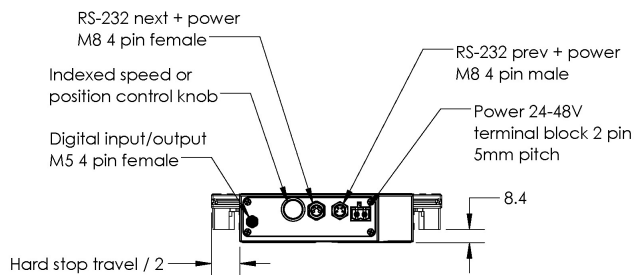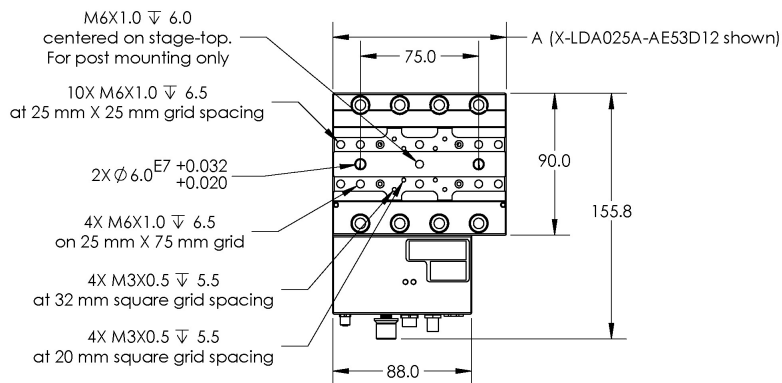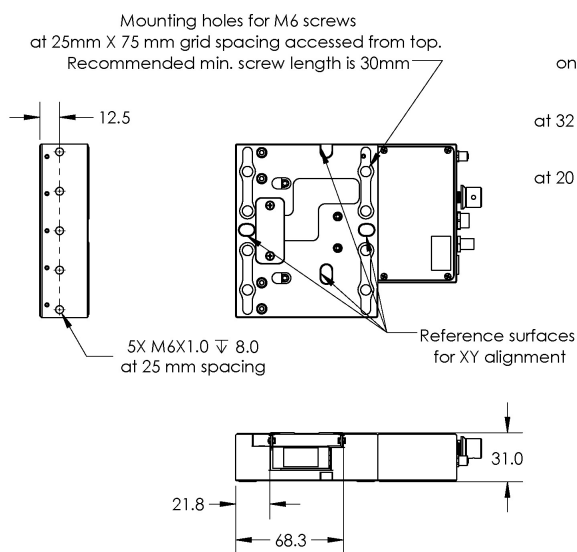

DWG 2323 R018

X-LDA-AE Series Specifications

Built-in Controller	
Accuracy (unidirectional)	1.5 μm (0.000059")
Repeatability	< 0.2 μm (< 0.000008")
Minimum Incremental Move	20 nm
Maximum Speed	800 mm/s (31.496"/s)
Minimum Speed	0.61 nm/s
Speed Resolution	0.61 nm/s
Encoder Type	Linear analog encoder
Encoder Count Size	1 nm
Peak Thrust	16 N (3.6 lb)
Maximum Continuous Thrust	6 N (1.3 lb)
Communication Interface	RS-232
Communication Protocol	Zaber ASCII (Default)
Data Cable Connection	Locking 4-pin M8
Maximum Centered Load	100 N (22.4 lb)
Maximum Cantilever Load	500 N-cm (708.1 oz-in)
Guide Type	Crossed-Roller Bearing
Typical Velocity Stability	$\pm 0.33\%$ at 100 mm/s with a 1.0 kg payload
Yaw	0.005° (0.087 mrad)
Power Supply	48 VDC
Power Plug	2-pin screw terminal
Maximum Current Draw	3000 mA
Motor Type	Moving Magnet Track Linear Motor
Force Constant	3.7 N/A (0.8 lbs/A)
Limit or Home Sensing	Optical Index Mark
Manual Control	Indexed knob with push switch
Axes of Motion	1
LED Indicators	Yes
Mounting Interface	M6 threaded holes
Digital Input	1
Digital Output	2

Built-in Controller	
Operating Temperature Range	0 to 50 °C
RoHS Compliant	Yes
CE Compliant	Yes
Vacuum Compatible	No


Part Number	Travel Range	Maximum Acceleration	Vertical Runout	Horizontal Runout
X-LDA025A-AE53D12	25 mm (0.984")	78.5 m/s ² (8.00 g)	< 4 µm (< 0.000157")	< 4 µm (< 0.000157")
X-LDA075A-AE53D12	75 mm (2.953")	44.1 m/s ² (4.50 g)	< 8 µm (< 0.000315")	< 6 µm (< 0.000236")
X-LDA150A-AE53D12	150 mm (5.905")	24.5 m/s ² (2.50 g)	< 15 µm (< 0.000591")	< 10 µm (< 0.000394")

Part Number	Pitch	Roll	Stiffness in Pitch	Stiffness in Roll
X-LDA025A-AE53D12	0.006° (0.105 mrad)	0.005° (0.087 mrad)	500 N-m/° (35 µrad/N-m)	500 N-m/° (35 µrad/N-m)
X-LDA075A-AE53D12	0.016° (0.279 mrad)	0.007° (0.122 mrad)	1000 N-m/° (17 µrad/N-m)	600 N-m/° (29 µrad/N-m)
X-LDA150A-AE53D12	0.02° (0.349 mrad)	0.015° (0.262 mrad)	3000 N-m/° (6 µrad/N-m)	700 N-m/° (25 µrad/N-m)


Part Number	Stiffness in Yaw	Moving Mass	Weight
X-LDA025A-AE53D12	400 N-m/° (44 µrad/N-m)	0.29 kg (0.638 lbs)	0.91 kg (2.006 lb)
X-LDA075A-AE53D12	900 N-m/° (19 µrad/N-m)	0.43 kg (0.946 lbs)	1.26 kg (2.778 lb)
X-LDA150A-AE53D12	1750 N-m/° (10 µrad/N-m)	0.67 kg (1.474 lbs)	1.81 kg (3.990 lb)

X-LDA-AE Series Charts


Typical Accuracy

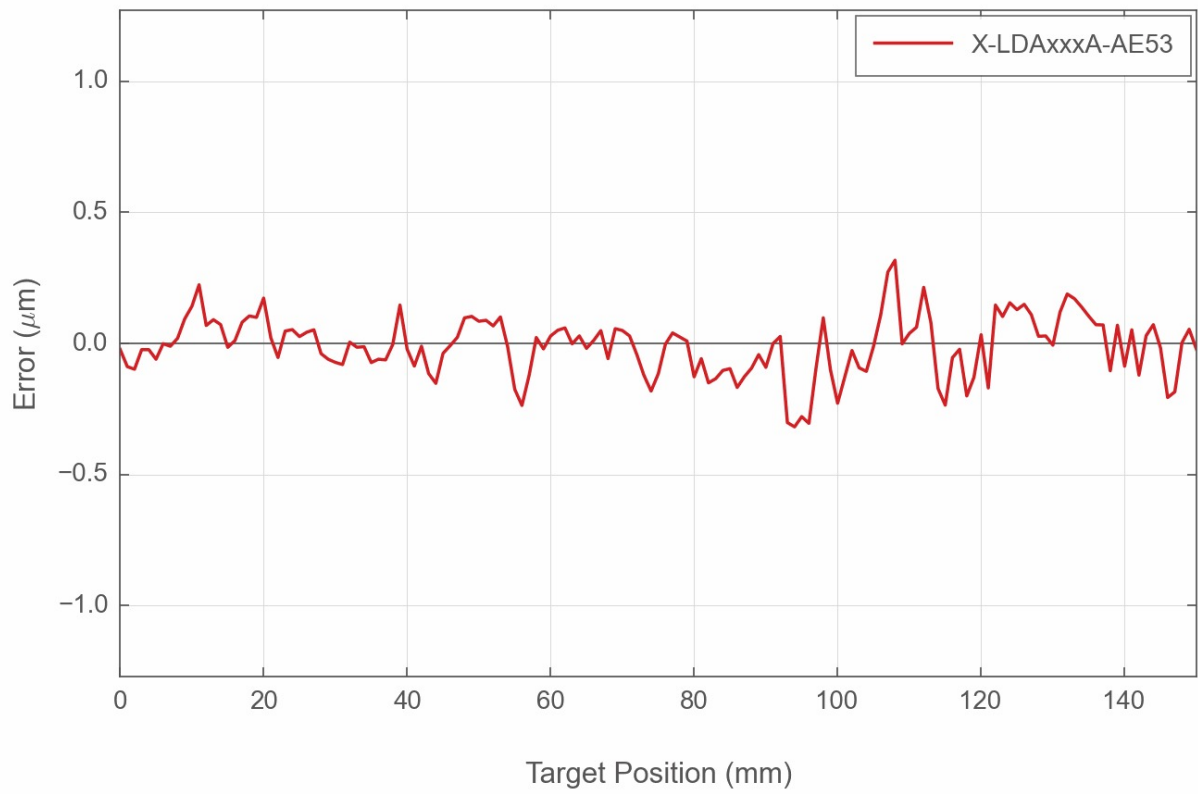

Typical Minimum Incremental Move

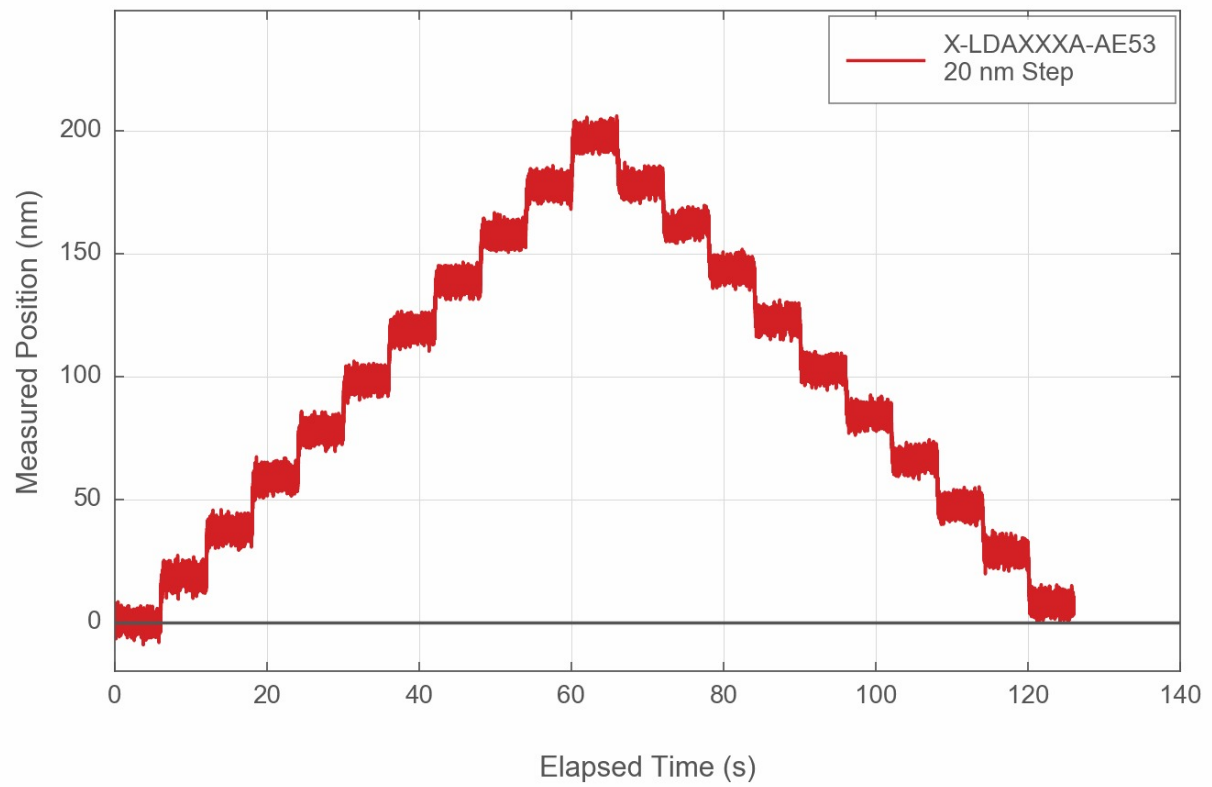

Velocity Stability and Following Error

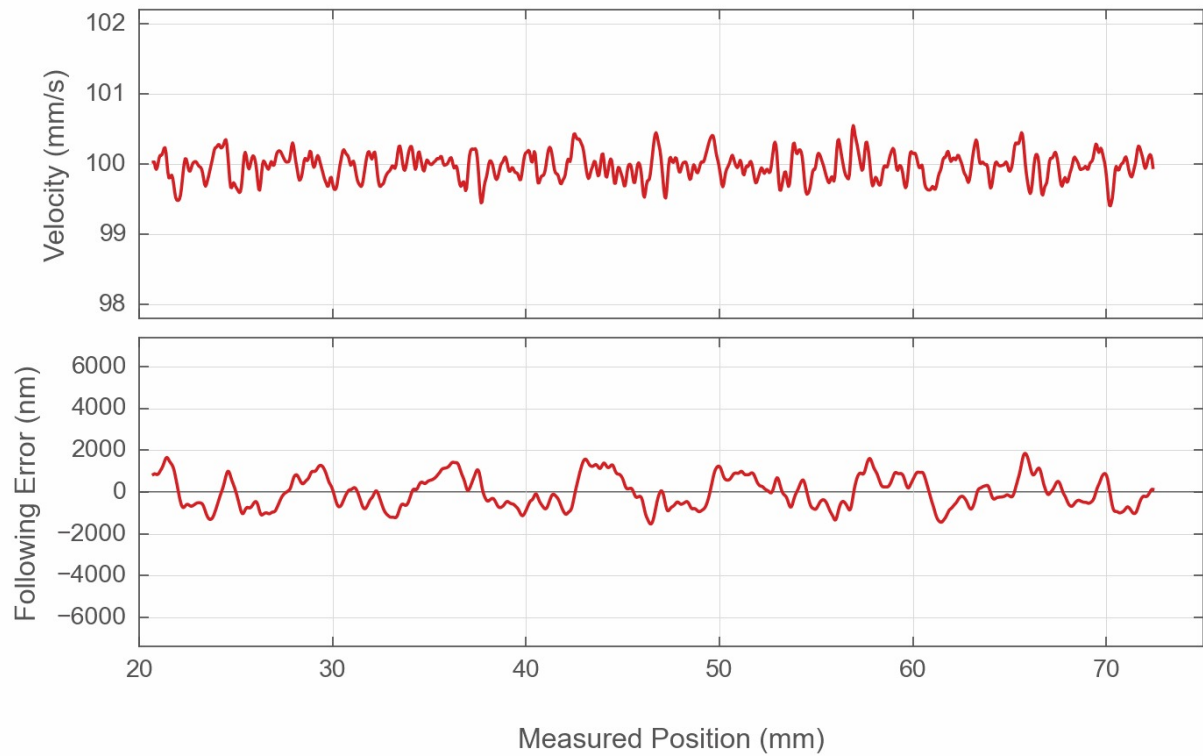

Contact

Email: contact@zaber.com

Phone (toll free Canada/USA): 1-888-276-8033

Phone (direct): 1-604-569-3780

Fax: 1-604-648-8033

Zaber Technologies Inc.

#2 - 605 West Kent Ave. N.

Vancouver, British Columbia

Canada, V6P 6T7

<https://www.zaber.com>