

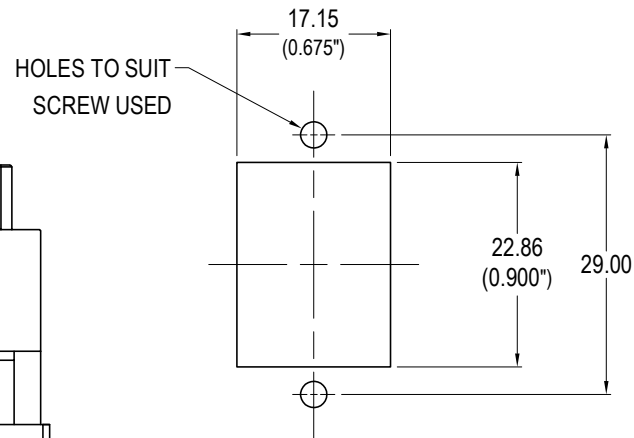


DUAL MOUNT
CAN BE FRONT OR REAR MOUNTED

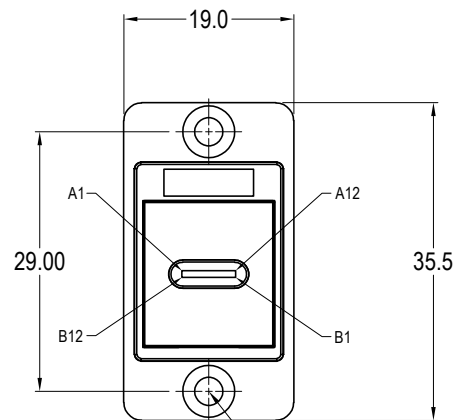


ISS.	AMEND	DATE
1	ISSUED	01/10/20


PLAIN HOLE VARIANTS
'X' VERSION Ø2.5
'X1' VERSION Ø3.2



3x HOLE VARIANTS
Ø3.2mm CSK 90° x Ø5.85
'X' PLAIN Ø2.5 HOLES
'X1' PLAIN Ø3.2 HOLES

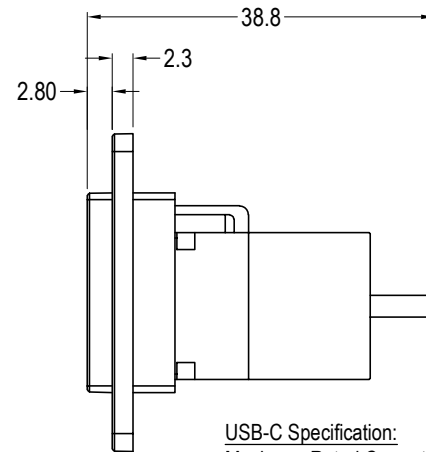

USB-C Specification:
Maximum Rated Current - 3A
Maximum Working Voltage - 30V
Withstanding Voltage - 100V for 1 minute.
Contact Resistance - 40 Milli-ohms Max.
Insulation Resistance - 100 Mega-ohms Min.
Insulator Flammability Rating - UL-94V0
Insertion Life - 10,000 Cycles.

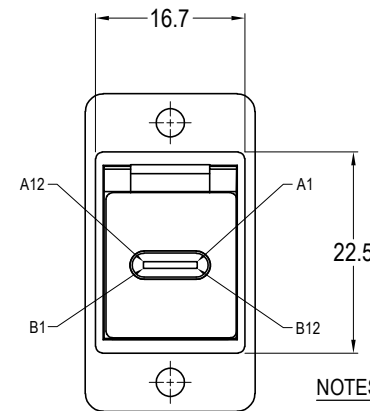

NOTES:

Recepticle to Plug connection:
A1 to A1, A2 to A2, A3 to A3 etc..
B1 to B1, B2 to B2, B3 to B3 etc..

Materials:
Frame: PA66, UL94-V2
Insert: ABS - UL94 HB

VARIANTS

PART NO.	HOLE DETAILS
CP30711	HOLE Ø3.2 x CSK 90° x Ø5.85
CP30711X	PLAIN HOLE Ø2.5
CP30711X1	PLAIN HOLE Ø3.2

RoHS
COMPLIANT

TOLERANCE

NO DEC. PLACE ±
1 DEC. PLACE ±
2 DEC. PLACE ±
HOLE Ø ±
ANGLES ±
UNLESS
OTHERWISE STATED

Cliff Electronic Components Ltd.

76 Holmetherpe Avenue, Holmetherpe Industrial Estate,
Redhill, Surrey, RH1 2PF, England, UK
Tel: 01737-771375 Fax: 01737-766012 Website: www.cliffuk.co.uk

THE CONTENTS OF THIS DOCUMENT MUST NOT BE COPIED OR DISCLOSED
TO A 3rd PARTY WITHOUT WRITTEN PERMISSION OF CLIFF UK © 2020

DIMENSIONS IN MILLIMETERS UNLESS OTHERWISE STATED. WORK TO DIMENSIONS. REMOVE ALL BURRS. IF IN DOUBT ASK.

MATERIAL: See Notes

FINISH: See Notes

DRAWN: T.J.O.

APPROVED: D.P.J.

3rd ANGLE PROJECTION:



DO NOT SCALE

TITLE: DUAL MOUNT SLIM FT USBC F-M

DRWG. No. CP30711

FORM: A4DRWGH